

# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Philips LuxSpace Accent Compact Elbow

RS772B

Signify N.V.



## GENERAL INFORMATION

### MANUFACTURER

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	<a href="https://www.signify.com/global">https://www.signify.com/global</a>

### EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

### PRODUCT

Product name	Philips LUXSPACE ACCENT COMPACT ELBOW RPO
Additional labels	RS772B 27S/930 PSU-E HVWB FG BK EW
Product reference	910771143545
Place of production	Hungary
Period for data	2022
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	%

### ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit of 2956 lumens over 50000 hours
Declared unit mass	0.861 kg
GWP-fossil, A1-A3 (kgCO <sub>2</sub> e)	6,72E+00
GWP-total, A1-A3 (kgCO <sub>2</sub> e)	6,22E+00
Secondary material, inputs (%)	8.31
Secondary material, outputs (%)	12.5
Total energy use, A1-A3 (kWh)	29.2
Total water use, A1-A3 (m <sup>3</sup> e)	0.1

## PRODUCT AND MANUFACTURER

### ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people’s lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

### PRODUCT DESCRIPTION

With LuxSpace Accent Compact Elbow, retailers and building operators can enjoy the superior quality of light and market-leading energy efficiency of PerfectAccent optics in a refined and neutral product design. Powerful and discreet, LuxSpace Accent combines a high luminous flux in a compact form factor. Design-in and installation are easy due to its small built-in dimensions. Maintenance and upgrades of the optics is fast and requires no tools. Furthermore, LuxSpace Compact Elbow spots are certified as circular lighting and offer multiple system integration and dimming options, including wired as well as wireless. LuxSpace Accent Compact Elbow allows spot head rotation and can be angled out of the ceiling for maximum aiming flexibility. For prolonged shelf life and better visual representation of food, reducing food waste and increasing sales, fresh food LED lighting recipes are available. Check out our Fashion and Food catalog pages to find out more about PremiumWhite, PremiumColor, Fresh Meat, Rosé, Frost and Champagne.

For more information, please visit <https://www.lighting.philips.com/link/RS772B/fam/aa/en>

Philips LUXSPACE ACCENT COMPACT ELBOW RPO-RS772B

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	18.18	EUR, ASIA
Minerals	2.36	EU , APAC
Fossil materials	79.45	EUR, ASIA
Bio-based materials	0	Not applicable

### BIOGENIC CARBON CONTENT

Product’s biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.138

### FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Product
Mass per declared unit	0.861 kg
Functional unit	1 unit of 2956 lumens over 50000 hours
Reference service life	50000 hours

### SUBSTANCES, REACH - VERY HIGH CONCERN



The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

# PRODUCT LIFE-CYCLE

## SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x			x
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not relevant = MNR.

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Signify's manufacturing facilities are included in this stage.

The product is made of metals, plastics, and electronic components. All components are transported to Signify's production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire.

Philips LUXSPACE ACCENT COMPACT ELBOW RPO-RS772B

Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the wastes are due to ancillary materials used during manufacturing while the rest is due to material losses.

## TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

## PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity from Europe's electricity grid mix (B6). The total power consumption of the reference product is calculated as follows: Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.

## PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat

production (D). The benefits and loads of incineration and recycling are included in Module D.

# SYSTEM BOUNDARY

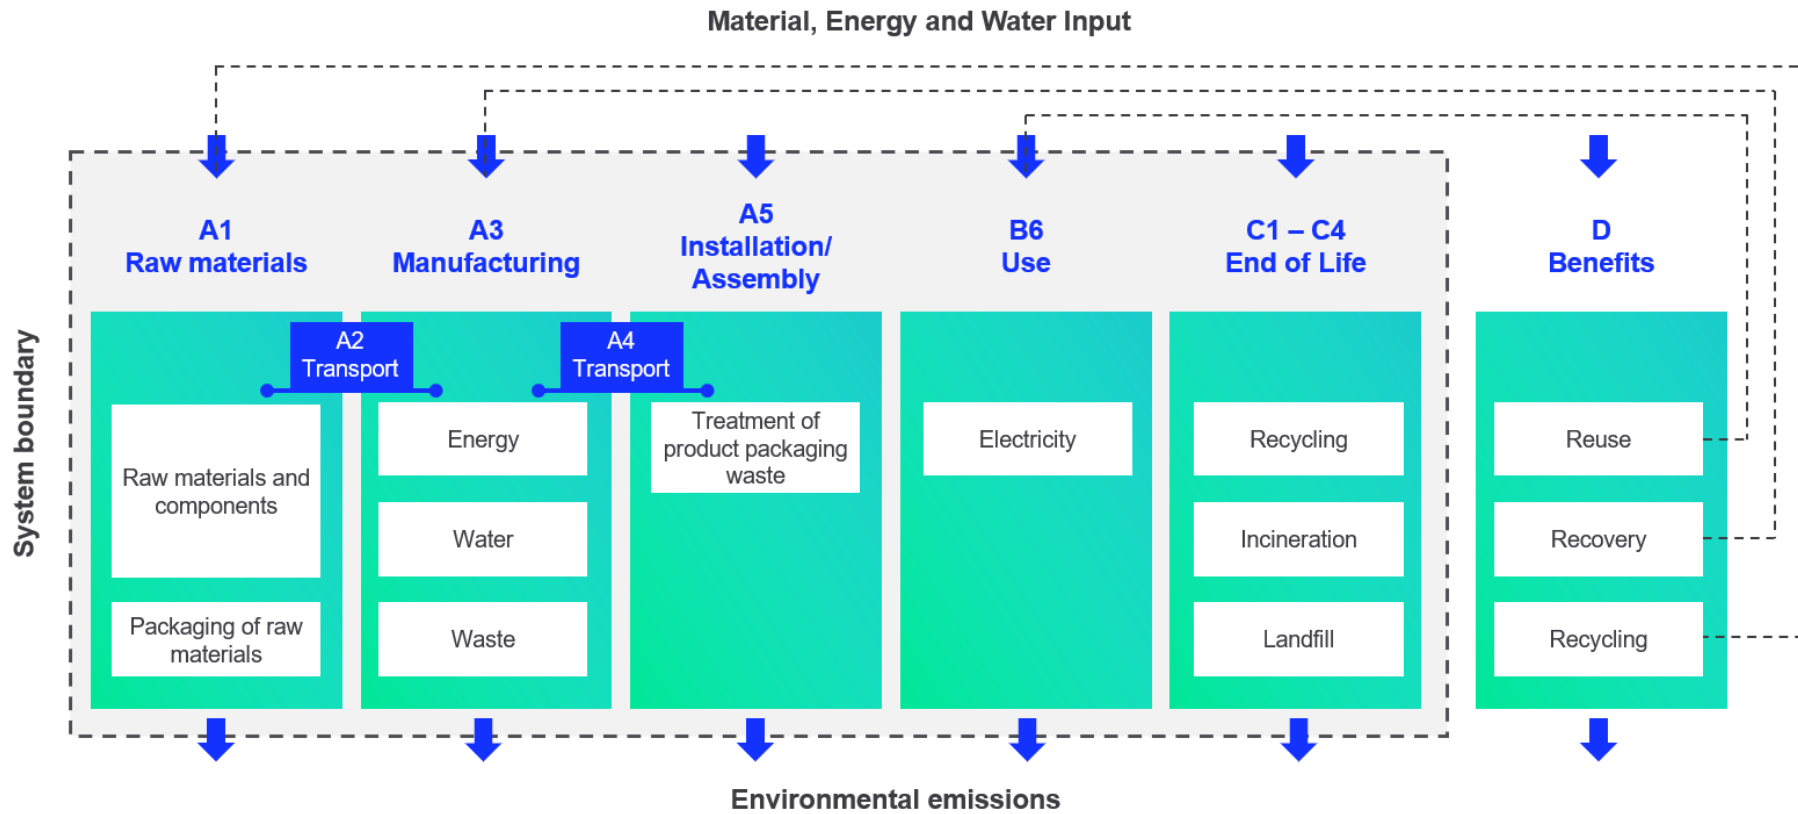

## LIFE-CYCLE ASSESSMENT

### CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

### ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
No allocation	No allocation
No allocation	Allocated by mass or volume
Allocated by mass or volume	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

### AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

### LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. EcoInvent 3.8 database was used as the source of environmental data.



# ENVIRONMENTAL IMPACT DATA

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	5,88E+00	2,41E-01	1,05E-01	6,22E+00	2,41E-01	6,73E-01	MNR	MNR	MNR	MNR	MNR	4,56E+02	MNR	MNR	2,50E-03	7,46E-01	3,96E-01	-7,47E-01
GWP – fossil	kg CO <sub>2</sub> e	5,88E+00	2,41E-01	5,99E-01	6,72E+00	2,40E-01	1,77E-01	MNR	MNR	MNR	MNR	MNR	4,54E+02	MNR	MNR	2,50E-03	7,46E-01	3,96E-01	-7,44E-01
GWP – biogenic	kg CO <sub>2</sub> e	-1,56E-02	0,00E+00	-4,97E-01	-5,12E-01	9,30E-05	4,97E-01	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	-2,47E-03
GWP – LULUC	kg CO <sub>2</sub> e	7,73E-03	1,25E-04	2,41E-03	1,03E-02	8,87E-05	5,06E-06	MNR	MNR	MNR	MNR	MNR	1,06E+00	MNR	MNR	9,22E-07	1,52E-05	7,87E-06	-9,75E-04
Ozone depletion pot.	kg CFC <sub>11</sub> e	8,36E-06	5,23E-08	4,28E-08	8,45E-06	5,53E-08	1,48E-09	MNR	MNR	MNR	MNR	MNR	2,31E-05	MNR	MNR	5,75E-10	2,01E-09	1,75E-09	-2,62E-08
Acidification potential	mol H <sup>+</sup> e	8,28E-02	3,85E-03	2,84E-03	8,95E-02	1,02E-03	1,34E-04	MNR	MNR	MNR	MNR	MNR	2,60E+00	MNR	MNR	1,06E-05	2,16E-04	1,14E-04	-3,58E-02
EP-freshwater <sup>2)</sup>	kg Pe	6,22E-04	1,51E-06	2,73E-05	6,51E-04	1,97E-06	1,61E-07	MNR	MNR	MNR	MNR	MNR	4,82E-02	MNR	MNR	2,05E-08	4,77E-07	2,58E-07	-1,44E-04
EP-marine	kg Ne	7,80E-03	9,78E-04	1,08E-03	9,87E-03	3,03E-04	5,97E-05	MNR	MNR	MNR	MNR	MNR	3,44E-01	MNR	MNR	3,15E-06	8,85E-05	9,77E-05	-1,77E-03
EP-terrestrial	mol Ne	8,81E-02	1,09E-02	7,50E-03	1,06E-01	3,34E-03	6,14E-04	MNR	MNR	MNR	MNR	MNR	3,92E+00	MNR	MNR	3,47E-05	9,22E-04	5,10E-04	-2,53E-02
POCP (“smog”) <sup>3)</sup>	kg NMVOCe	3,18E-02	2,93E-03	2,17E-03	3,69E-02	1,07E-03	1,52E-04	MNR	MNR	MNR	MNR	MNR	1,07E+00	MNR	MNR	1,11E-05	2,26E-04	1,38E-04	-7,02E-03
ADP-minerals & metals <sup>4)</sup>	kg Sbe	1,61E-03	4,68E-07	3,23E-06	1,61E-03	5,64E-07	4,96E-08	MNR	MNR	MNR	MNR	MNR	4,24E-03	MNR	MNR	5,86E-09	3,97E-07	4,54E-08	-8,59E-04
ADP-fossil resources	MJ	9,65E+01	3,37E+00	1,12E+01	1,11E+02	3,61E+00	1,23E-01	MNR	MNR	MNR	MNR	MNR	9,67E+03	MNR	MNR	3,75E-02	2,08E-01	1,43E-01	-7,92E+00
Water use <sup>5)</sup>	m <sup>3</sup> e depr.	3,36E+00	1,32E-02	3,40E-01	3,71E+00	1,62E-02	2,92E-02	MNR	MNR	MNR	MNR	MNR	2,64E+02	MNR	MNR	1,68E-04	3,07E-02	1,64E-02	-3,52E-01

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO<sub>4</sub>e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

## ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	3,79E-07	1,93E-08	4,22E-08	4,41E-07	2,77E-08	1,13E-09	MNR	MNR	MNR	MNR	MNR	8,53E-06	MNR	MNR	2,88E-10	1,35E-09	9,77E-10	-1,15E-07
Ionizing radiation <sup>6)</sup>	kBq U235e	5,27E-01	1,59E-02	3,31E-02	5,76E-01	1,72E-02	4,03E-04	MNR	MNR	MNR	MNR	MNR	2,62E+02	MNR	MNR	1,79E-04	1,15E-03	5,78E-04	-6,10E-02

Ecotoxicity (freshwater)	CTUe	6,74E+02	2,70E+00	1,91E+01	6,96E+02	3,25E+00	7,56E-01	MNR	MNR	MNR	MNR	MNR	6,58E+03	MNR	MNR	3,38E-02	1,79E+00	1,31E+00	-3,00E+02
Human toxicity, cancer	CTUh	1,83E-08	1,07E-10	3,39E-10	1,87E-08	7,98E-11	3,85E-11	MNR	MNR	MNR	MNR	MNR	2,15E-07	MNR	MNR	8,30E-13	7,21E-11	6,96E-10	-4,45E-09
Human tox. non-cancer	CTUh	8,63E-07	2,39E-09	6,76E-09	8,73E-07	3,22E-09	1,78E-09	MNR	MNR	MNR	MNR	MNR	7,08E-06	MNR	MNR	3,34E-11	2,81E-09	4,65E-08	-4,74E-07
SQP <sup>7)</sup>	-	3,55E+01	2,61E+00	1,42E+01	5,22E+01	4,16E+00	6,06E-02	MNR	MNR	MNR	MNR	MNR	1,75E+03	MNR	MNR	4,33E-02	1,18E-01	1,97E-01	-1,30E+01

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

### USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ	8,11E+00	3,24E-02	3,28E+00	1,14E+01	4,07E-02	3,77E-03	MNR	MNR	MNR	MNR	MNR	1,97E+03	MNR	MNR	4,23E-04	1,55E-02	4,32E-03	-1,71E+00
Renew. PER as material	MJ	1,43E-01	0,00E+00	4,35E+00	4,49E+00	0,00E+00	-4,35E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	8,25E+00	3,24E-02	7,63E+00	1,59E+01	4,07E-02	-4,35E+00	MNR	MNR	MNR	MNR	MNR	1,97E+03	MNR	MNR	4,23E-04	1,55E-02	4,32E-03	-1,71E+00
Non-re. PER as energy	MJ	8,24E+01	3,37E+00	7,77E+00	9,36E+01	3,61E+00	1,23E-01	MNR	MNR	MNR	MNR	MNR	9,65E+03	MNR	MNR	3,75E-02	2,09E-01	1,43E-01	-7,92E+00
Non-re. PER as material	MJ	1,37E+01	0,00E+00	3,40E+00	1,71E+01	0,00E+00	-3,40E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	-6,40E+00	-6,43E+00	0,00E+00
Total use of non-re. PER	MJ	9,62E+01	3,37E+00	1,12E+01	1,11E+02	3,61E+00	-3,28E+00	MNR	MNR	MNR	MNR	MNR	9,65E+03	MNR	MNR	3,75E-02	-6,19E+00	-6,29E+00	-7,92E+00
Secondary materials	kg	7,15E-02	1,16E-03	3,40E-01	4,13E-01	1,00E-03	1,52E-04	MNR	MNR	MNR	MNR	MNR	9,96E-01	MNR	MNR	1,04E-05	1,64E-04	1,72E-04	4,63E-02
Renew. secondary fuels	MJ	4,21E-03	7,46E-06	2,66E-02	3,08E-02	1,01E-05	2,13E-06	MNR	MNR	MNR	MNR	MNR	8,07E-03	MNR	MNR	1,05E-07	7,79E-06	3,25E-06	-3,67E-04
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m <sup>3</sup>	8,92E-02	3,54E-04	8,24E-03	9,78E-02	4,68E-04	4,27E-04	MNR	MNR	MNR	MNR	MNR	8,32E+00	MNR	MNR	4,86E-06	1,13E-03	6,11E-04	-1,54E-02

8) PER = Primary energy resources.

### END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	6,99E-01	4,52E-03	3,10E-02	7,35E-01	4,79E-03	6,71E-05	MNR	MNR	MNR	MNR	MNR	3,47E+01	MNR	MNR	4,98E-05	4,92E-04	2,87E-02	-1,10E-01
Non-hazardous waste	kg	2,32E+01	6,00E-02	6,52E-01	2,39E+01	7,87E-02	4,20E-01	MNR	MNR	MNR	MNR	MNR	2,20E+03	MNR	MNR	8,18E-04	3,26E-01	4,14E-01	-1,04E+01
Radioactive waste	kg	1,87E-04	2,30E-05	1,50E-05	2,25E-04	2,42E-05	1,61E-07	MNR	MNR	MNR	MNR	MNR	7,04E-02	MNR	MNR	2,51E-07	2,86E-07	0,00E+00	-2,23E-05

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	1,07E-01	0,00E+00	0,00E+00
Materials for energy rec	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	4,29E-02	4,29E-02	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	6,84E+00	0,00E+00	0,00E+00

### ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> e	5,72E+00	2,39E-01	6,07E-01	6,56E+00	2,38E-01	1,76E-01	MNR	MNR	MNR	MNR	MNR	4,50E+02	MNR	MNR	2,47E-03	7,44E-01	4,03E-01	-7,27E-01
Ozone depletion Pot.	kg CFC <sub>11</sub> e	5,64E-06	4,14E-08	3,57E-08	5,72E-06	4,38E-08	1,29E-09	MNR	MNR	MNR	MNR	MNR	2,00E-05	MNR	MNR	4,55E-10	1,78E-09	1,48E-09	-2,16E-08
Acidification	kg SO <sub>2</sub> e	7,16E-02	3,07E-03	2,14E-03	7,68E-02	7,91E-04	9,66E-05	MNR	MNR	MNR	MNR	MNR	2,20E+00	MNR	MNR	8,22E-06	1,59E-04	8,27E-05	-3,14E-02
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	2,50E-02	3,95E-04	1,25E-03	2,67E-02	1,80E-04	7,42E-05	MNR	MNR	MNR	MNR	MNR	1,69E+00	MNR	MNR	1,87E-06	1,02E-04	1,39E-03	-8,51E-03
POCP (“smog”)	kg C <sub>2</sub> H <sub>4</sub> e	3,79E-03	8,50E-05	2,02E-04	4,08E-03	3,09E-05	2,72E-06	MNR	MNR	MNR	MNR	MNR	9,01E-02	MNR	MNR	3,21E-07	4,09E-06	7,81E-06	-1,21E-03
ADP-elements	kg Sbe	1,60E-03	4,56E-07	2,90E-06	1,61E-03	5,46E-07	3,95E-08	MNR	MNR	MNR	MNR	MNR	4,23E-03	MNR	MNR	5,67E-09	3,82E-07	3,75E-08	-8,58E-04
ADP-fossil	MJ	9,60E+01	3,37E+00	1,11E+01	1,10E+02	3,61E+00	1,23E-01	MNR	MNR	MNR	MNR	MNR	9,65E+03	MNR	MNR	3,75E-02	2,08E-01	1,43E-01	-7,91E+00

## APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

**Table A1: Light management function (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

**Table A2 Scaled GWP per scaling factor (EPD Hub aligned)**

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
RS772B LED17S/827	1814.0	13.7	132.4	0.604	0.604	0.453	0.453	0.332	275.4	206.6	206.6	151.4
RS772B LED17S/830	1884.0	13.8	136.5	0.608	0.608	0.456	0.456	0.334	277.2	207.9	207.9	152.3
RS772B LED17S/840	1965.0	13.8	142.4	0.608	0.608	0.456	0.456	0.334	277.2	207.9	207.9	152.3
RS772B LED17S/930	1746.0	13.7	127.4	0.604	0.604	0.453	0.453	0.332	275.4	206.6	206.6	151.4
RS772B LED17S/CH	1814.0	13.7	132.4	0.604	0.604	0.453	0.453	0.332	275.4	206.6	206.6	151.4
RS772B LED17S/PW930	1746.0	13.7	127.4	0.604	0.604	0.453	0.453	0.332	275.4	206.6	206.6	151.4
RS772B LED19S/FMT	1848.0	22.2	83.2	0.978	0.978	0.734	0.734	0.538	446.0	334.7	334.7	245.3
RS772B LED19S/ROSE	1973.0	19.6	100.7	0.863	0.863	0.647	0.647	0.475	393.5	295.0	295.0	216.6
RS772B LED27S/827	2568.0	19.4	132.4	0.855	0.855	0.641	0.641	0.47	389.9	292.3	292.3	214.3
RS772B LED27S/830	2673.0	19.4	137.8	0.855	0.855	0.641	0.641	0.47	389.9	292.3	292.3	214.3
RS772B LED27S/840	2784.0	19.4	143.5	0.855	0.855	0.641	0.641	0.47	389.9	292.3	292.3	214.3
<b>RS772B LED27S/930</b>	2956.0	22.7	130.2	1.0	1.0	0.75	0.75	0.55	456.0	342.0	342.0	250.8

RS772B LED27S/CH	2568.0	18.9	135.9	0.833	0.833	0.625	0.625	0.458	379.8	285.0	285.0	208.8
RS772B LED27S/FMT	2571.0	30.5	84.3	1.344	1.344	1.008	1.008	0.739	612.9	459.6	459.6	337.0
RS772B LED27S/FR	2821.0	28.1	100.4	1.238	1.238	0.928	0.928	0.681	564.5	423.2	423.2	310.5
RS772B LED27S/PC930	2850.0	25.0	114.0	1.101	1.101	0.826	0.826	0.606	502.1	376.7	376.7	276.3
RS772B LED27S/PW930	2956.0	22.7	130.2	1.0	1.0	0.75	0.75	0.55	456.0	342.0	342.0	250.8
RS772B LED27S/ROSE	2773.0	29.3	94.6	1.291	1.291	0.968	0.968	0.71	588.7	441.4	441.4	323.8
RS772B LED39S/827	3886.0	28.5	136.4	1.256	1.256	0.942	0.942	0.691	572.7	429.6	429.6	315.1
RS772B LED39S/830	3994.0	28.3	141.1	1.247	1.247	0.935	0.935	0.686	568.6	426.4	426.4	312.8
RS772B LED39S/840	4194.0	28.3	148.2	1.247	1.247	0.935	0.935	0.686	568.6	426.4	426.4	312.8
RS772B LED39S/930	4016.0	32.2	124.7	1.419	1.419	1.064	1.064	0.78	647.1	485.2	485.2	355.7
RS772B LED39S/CH	3886.0	28.3	137.3	1.247	1.247	0.935	0.935	0.686	568.6	426.4	426.4	312.8
RS772B LED39S/FR	3852.0	34.6	111.3	1.524	1.524	1.143	1.143	0.838	694.9	521.2	521.2	382.1
RS772B LED39S/PC930	3787.0	34.6	109.5	1.524	1.524	1.143	1.143	0.838	694.9	521.2	521.2	382.1
RS772B LED39S/PW930	4016.0	32.2	124.7	1.419	1.419	1.064	1.064	0.78	647.1	485.2	485.2	355.7
RS772B LED49S/827	4878.0	39.1	124.8	1.722	1.722	1.292	1.292	0.947	785.2	589.2	589.2	431.8
RS772B LED49S/830	5013.0	39.1	128.2	1.722	1.722	1.292	1.292	0.947	785.2	589.2	589.2	431.8
RS772B LED49S/840	5319.0	39.1	136.0	1.722	1.722	1.292	1.292	0.947	785.2	589.2	589.2	431.8
RS772B LED49S/930	4787.0	41.2	116.2	1.815	1.815	1.361	1.361	0.998	827.6	620.6	620.6	455.1
RS772B LED49S/PW930	4787.0	41.2	116.2	1.815	1.815	1.361	1.361	0.998	827.6	620.6	620.6	455.1

*\* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" for are valid.*

## APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output ( $O_{lum}$ ) and reference service life ( $RSL$ ) of each product within the same product family.

To calculate the Scaled Impact ( $SI_{pep}$ ), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output ( $O_{lum}$ ) and reference service lifetime ( $RSL$ ) of the product to estimate the final environmental impact. The scaled impact ( $SI_{pep}$ ) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

- Calculate the GWP scaling factor (*PGSF*), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

- Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

**Table A3: Light management functions (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

- Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.



**Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)**

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
RS772B LED17S/827	1814.0	13.7	132.4	0.604	0.233	0.175	0.175	0.128	106.2	79.8	79.8	58.4
RS772B LED17S/830	1884.0	13.8	136.5	0.608	0.226	0.17	0.17	0.124	103.1	77.5	77.5	56.5
RS772B LED17S/840	1965.0	13.8	142.4	0.608	0.217	0.163	0.163	0.119	99.0	74.3	74.3	54.3
RS772B LED17S/930	1746.0	13.7	127.4	0.604	0.242	0.182	0.182	0.133	110.4	83.0	83.0	60.6
RS772B LED17S/CH	1814.0	13.7	132.4	0.604	0.233	0.175	0.175	0.128	106.2	79.8	79.8	58.4
RS772B LED17S/PW930	1746.0	13.7	127.4	0.604	0.242	0.182	0.182	0.133	110.4	83.0	83.0	60.6
RS772B LED19S/FMT	1848.0	22.2	83.2	0.978	0.37	0.277	0.277	0.204	168.7	126.3	126.3	93.0
RS772B LED19S/ROSE	1973.0	19.6	100.7	0.863	0.306	0.229	0.229	0.168	139.5	104.4	104.4	76.6
RS772B LED27S/827	2568.0	19.4	132.4	0.855	0.233	0.175	0.175	0.128	106.2	79.8	79.8	58.4
RS772B LED27S/830	2673.0	19.4	137.8	0.855	0.224	0.168	0.168	0.123	102.1	76.6	76.6	56.1
RS772B LED27S/840	2784.0	19.4	143.5	0.855	0.215	0.161	0.161	0.118	98.0	73.4	73.4	53.8
RS772B LED27S/930	2956.0	22.7	130.2	1.0	0.237	0.178	0.178	0.13	108.1	81.2	81.2	59.3
RS772B LED27S/CH	2568.0	18.9	135.9	0.833	0.227	0.17	0.17	0.125	103.5	77.5	77.5	57.0
RS772B LED27S/FMT	2571.0	30.5	84.3	1.344	0.366	0.274	0.274	0.201	166.9	124.9	124.9	91.7
RS772B LED27S/FR	2821.0	28.1	100.4	1.238	0.307	0.23	0.23	0.169	140.0	104.9	104.9	77.1
RS772B LED27S/PC930	2850.0	25.0	114.0	1.101	0.27	0.202	0.202	0.149	123.1	92.1	92.1	67.9
RS772B LED27S/PW930	2956.0	22.7	130.2	1.0	0.237	0.178	0.178	0.13	108.1	81.2	81.2	59.3
RS772B LED27S/ROSE	2773.0	29.3	94.6	1.291	0.326	0.244	0.244	0.179	148.7	111.3	111.3	81.6
RS772B LED39S/827	3886.0	28.5	136.4	1.256	0.226	0.17	0.17	0.124	103.1	77.5	77.5	56.5
RS772B LED39S/830	3994.0	28.3	141.1	1.247	0.219	0.164	0.164	0.12	99.9	74.8	74.8	54.7
RS772B LED39S/840	4194.0	28.3	148.2	1.247	0.208	0.156	0.156	0.114	94.8	71.1	71.1	52.0
RS772B LED39S/930	4016.0	32.2	124.7	1.419	0.247	0.185	0.185	0.136	112.6	84.4	84.4	62.0

RS772B LED39S/CH	3886.0	28.3	137.3	1.247	0.225	0.169	0.169	0.124	102.6	77.1	77.1	56.5
RS772B LED39S/FR	3852.0	34.6	111.3	1.524	0.277	0.208	0.208	0.152	126.3	94.8	94.8	69.3
RS772B LED39S/PC930	3787.0	34.6	109.5	1.524	0.282	0.211	0.211	0.155	128.6	96.2	96.2	70.7
RS772B LED39S/PW930	4016.0	32.2	124.7	1.419	0.247	0.185	0.185	0.136	112.6	84.4	84.4	62.0
RS772B LED49S/827	4878.0	39.1	124.8	1.722	0.247	0.185	0.185	0.136	112.6	84.4	84.4	62.0
RS772B LED49S/830	5013.0	39.1	128.2	1.722	0.24	0.18	0.18	0.132	109.4	82.1	82.1	60.2
RS772B LED49S/840	5319.0	39.1	136.0	1.722	0.227	0.17	0.17	0.125	103.5	77.5	77.5	57.0
RS772B LED49S/930	4787.0	41.2	116.2	1.815	0.265	0.199	0.199	0.146	120.8	90.7	90.7	66.6
RS772B LED49S/PW930	4787.0	41.2	116.2	1.815	0.265	0.199	0.199	0.146	120.8	90.7	90.7	66.6

*\* Note that if the product is non-dimmable, only the values for “NC (No Control)” are valid; if the driver type is PSU, only the values for “NC (No Control)” and “PS (presence sensing)” for are valid.*

## ANNEX

### USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

The table in this annex is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

This EPD was done according to a specific customer use location that can be read in the paragraph **PRODUCT USE AND MAINTENANCE (B1-B7)**.

If for example the EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

## ENVIRONMENTAL IMPACT DATA

### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>2)</sup>	kg CO <sub>2</sub> e	5,88E+00	2,61E-01	-1,25E-01	6,02E+00	3,02E-01	5,41E-01	MND	MND	MND	MND	MND	4,06E+02	MND	MNR	1,77E-02	2,62E-01	1,88E-01	-1,09E+01

Divide that value according to the EU value from the following table (EU = 3,96E-01) and then multiplying for the Finland value from the same table (FINLAND = 2,70E-01).

Thus, the calculation of this example would be:

$$\text{New B6 GWP tot for Finland} = (4,06E+02 / 3,96E-01) \times 2,70E-01 = 2,76 E+02$$

Country	GWP tot (kg CO2 eq. per kwh)
AUSTRALIA	9,59E-01
AUSTRIA	3,37E-01
BELGIUM	2,63E+02
CHINA	1,14E+00
DENMARK	2,91E-01
EU	3,96E-01
FINLAND	2,70E-01
FRANCE	8,77E-02
GERMANY	5,32E-01
HUNGARY	4,67E+02
IRELAND	4,26E+02
ITALY	3,94E-01
LATAM	3,50E-01
NAM	4,83E-01
NETHERLANDS	5,88E-01
NORWAY	2,59E-02
POLAND	1,05E+03

PORTUGAL	4,22E+02
ROW	7,32E-01
SPAIN	3,34E-01
SWEDEN	4,95E-02
SWITZERLAND	5,38E+01
UK	3,17E-01