
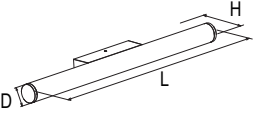






LED LINEAR LIGHT

Item Code	CCT	kg	
521028002600	3000K/4000K	0.59Kg	
521028002700	3000K/4000K	0.8Kg	

	Model Name	L (mm)	D (mm)	H (mm)	Rated Voltage (V~)	Frequency (Hz)	Current (A)	Power Factor	Rated Power(W)
	LEDLinear-Bali L600-8W	600	82	46	220-240	50/60	0.1	0.9	8
	LEDLinear-Bali L900-12W	900	82	46					12

Light Source

Product Code	Product Description	N	Light source code	QR Code	Energy Label
521028002600	LEDLinear-Bali L600-8W-830/840-WH	1	LS118000832		
521028002700	LEDLinear-Bali L900-12W-830/840-WH	1	LS118001232		

* This product contains a light source of energy efficiency class (B).

Safety Instructions


To ensure correct function and safety, please read and follow all instructions carefully before using the product:

1. Turn off power supply before installation or before doing any maintenance work.
2. Do not install any luminaire near the heat source.
3. Do not exceed the nominal supply voltage or amperage ratings.
4. All wiring and installation of the light fitting must adhere to local and national wiring rules.
5. Take care not to pull any electrical wires during unpacking as this may damage the connection.
6. Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
7. To avoid injury or damage to the fitting, please ensure that power leads and screws are secure before connecting the power.
8. Please keep instructions for future reference.
9. Please refer to IP(Ingress Protection) rating of this luminaire when deciding the location of installation.
10. If luminaire is exposed to high corrosive environment(coastal rigion), it will require a higher durability of powder coat, consult manufacturer before installation.

Installation Procedure


WARNING

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.




Waterproof Installation Tips (If applicable)

Waterproof gasket for screwing




Fasten the waterproof gasket into the mounting screws to prevent water from leaking inside.

Waterproof grommet for cable entry




If there is gap between cable and waterproof grommet, please fill it with water-resistant silicone caulk to prevent water from leaking inside.

Waterproof cable Gland for mains entry



Ensure that the waterproof cable gland is tightened to prevent water from leaking inside.

Water-resistant silicone caulk in knock out hole

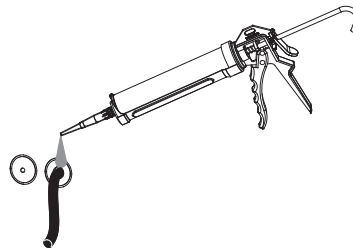

Caulks in knock out holes are tight enough to avoid dust, insects, and especially water from leaking inside.

Wall mount installation

1. Drilling holes and marking the mounting position.




2. Mounting the bracket to the wall. Note: select preferred colour temperature for product in CCT change function only.

3. Mounting the luminaire to the bracket. Dimensions: spec (600mm, 900mm) and A (148mm, 148mm).

4. Electrical wiring connections. Legend: L (Switched), Earth, N (Neutral). Wire diameter: 0.5-2.5mm², Wire stripping length: 8-10mm.

5. Final wiring and connection to the luminaire.

6. The completed installation. Note: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. **Caution risk of Electric shock.**



Opplé Lighting B.V.
 Meerenakkerweg 1-07
 5652 AR Eindhoven
 The Netherlands
 service@opple.com
 www.opple.com

Data subject to change
 Les données sont sujettes à modifications
 Änderungen vorbehalten

OPPLE Lighting Co., Ltd.
 Room 411, Building 1 No. 6111, Longdong Avenue,
 Pudong New District, Shanghai City 201201, P. R. China