
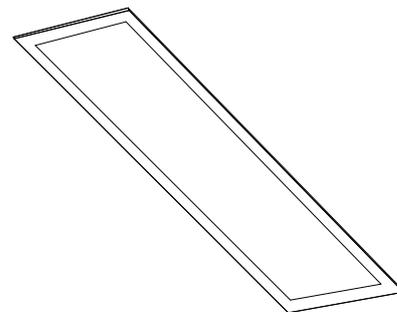


# Slim Panel Basic G4



Item Code	Luminaire Description	CCT	kg
542016014900	LEDPanelS-B4 Sq595-23/34W-830	3000K	2.0kg
542016014700	LEDPanelS-B4 Sq595-23/34W-840	4000K	2.0kg
542016014200	LEDPanelS-B4 Sq595-23/34W-830-U19	3000K	2.0kg
542016015700	LEDPanelS-B4 Sq595-23/34W-840-U19	4000K	2.0kg
542016014000	LEDPanelS-B4 Sq620-23/34W-830	3000K	2.2kg
542016014300	LEDPanelS-B4 Sq620-23/34W-840	4000K	2.2kg
542016015200	LEDPanelS-B4 Sq620-23/34W-830-U19	3000K	2.2kg
542016015400	LEDPanelS-B4 Sq620-23/34W-840-U19	4000K	2.2kg
542016015000	LEDPanelS-B4 Re295-23/34W-830	3000K	2.1kg
542016014500	LEDPanelS-B4 Re295-23/34W-840	4000K	2.1kg
542016014800	LEDPanelS-B4 Re295-23/34W-830-U19	3000K	2.1kg
542016014600	LEDPanelS-B4 Re295-23/34W-840-U19	4000K	2.1kg
542016014400	LEDPanelS-B4 Sq595-34W-DALI-830	3000K	2.0kg
542016015500	LEDPanelS-B4 Sq595-34W-DALI-840	4000K	2.0kg
542016014100	LEDPanelS-B4 Sq595-34W-DALI-830-U19	3000K	2.0kg
542016015300	LEDPanelS-B4 Sq595-34W-DALI-840-U19	4000K	2.0kg
542016015600	LEDPanelS-B4 Sq620-34W-DALI-830	3000K	2.2kg
542016015100	LEDPanelS-B4 Sq620-34W-DALI-840	4000K	2.2kg
542016012900	LEDPanelS-B4 Sq620-34W-DALI-830-U19	3000K	2.2kg
542016013700	LEDPanelS-B4 Sq620-34W-DALI-840-U19	4000K	2.2kg
542016013500	LEDPanelS-B4 Re295-34W-DALI-830	3000K	2.1kg
542016013200	LEDPanelS-B4 Re295-34W-DALI-840	4000K	2.1kg
542016013000	LEDPanelS-B4 Re295-34W-DALI-830-U19	3000K	2.1kg
542016013300	LEDPanelS-B4 Re295-34W-DALI-840-U19	4000K	2.1kg
542016013800	LEDPanelS-B4 Sq595-23/34W-830/840	3000K	2.0kg
542016013400	LEDPanelS-B4 Sq595-23/34W-830/840-U19	4000K	2.0kg
542016013600	LEDPanelS-B4 Sq620-23/34W-830/840	3000K	2.2kg
542016013100	LEDPanelS-B4 Sq620-23/34W-830/840-U19	4000K	2.2kg
542003021800*	LEDPanelRc-S-B2 Mounting-Springs	/	0.11kg
542098033000*	LEDPanelRc-S-B2 Re298 Mounting-Springs	/	0.13kg
542098045500*	LEDPanelS-P Suspension-Kit-G6	/	0.16kg



\*Accessories should be purchased separately.





## Light Source

Product Code	Product Description	N	Light Source Code	QR Code	Energy Label
542016014900	LEDPanelS-B4 Sq595-23/34W-830	7	LS133000412-01		
542016014200	LEDPanelS-B4 Sq595-23/34W-830-U19	7			
542016014000	LEDPanelS-B4 Sq620-23/34W-830	7			
542016015200	LEDPanelS-B4 Sq620-23/34W-830-U19	7			
542016014400	LEDPanelS-B4 Sq595-34W-DALI-830	7			
542016014100	LEDPanelS-B4 Sq595-34W-DALI-830-U19	7			
542016015600	LEDPanelS-B4 Sq620-34W-DALI-830	7			
542016012900	LEDPanelS-B4 Sq620-34W-DALI-830-U19	7			
542016014700	LEDPanelS-B4 Sq595-23/34W-840	7	LS133000415-01		
542016015700	LEDPanelS-B4 Sq595-23/34W-840-U19	7			
542016014300	LEDPanelS-B4 Sq620-23/34W-840	7			
542016015400	LEDPanelS-B4 Sq620-23/34W-840-U19	7			
542016015500	LEDPanelS-B4 Sq595-34W-DALI-840	7			
542016015300	LEDPanelS-B4 Sq595-34W-DALI-840-U19	7			
542016015100	LEDPanelS-B4 Sq620-34W-DALI-840	7			
542016013700	LEDPanelS-B4 Sq620-34W-DALI-840-U19	7			
542016013800	LEDPanelS-B4 Sq595-23/34W-830/840	7	LS133000432-01		
542016013400	LEDPanelS-B4 Sq595-23/34W-830/840-U19	7			
542016013600	LEDPanelS-B4 Sq620-23/34W-830/840	7			
542016013100	LEDPanelS-B4 Sq620-23/34W-830/840-U19	7			
542016015000	LEDPanelS-B4 Re295-23/34W-830	3	LS133001012-02		
542016014800	LEDPanelS-B4 Re295-23/34W-830-U19	3			
542016013500	LEDPanelS-B4 Re295-34W-DALI-830	3			
542016013000	LEDPanelS-B4 Re295-34W-DALI-830-U19	3			
542016014500	LEDPanelS-B4 Re295-23/34W-840	3	LS133001015-02		
542016014600	LEDPanelS-B4 Re295-23/34W-840-U19	3			
542016013200	LEDPanelS-B4 Re295-34W-DALI-840	3			
542016013300	LEDPanelS-B4 Re295-34W-DALI-840-U19	3			

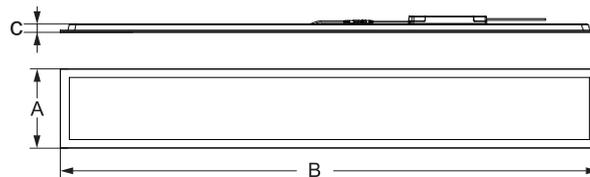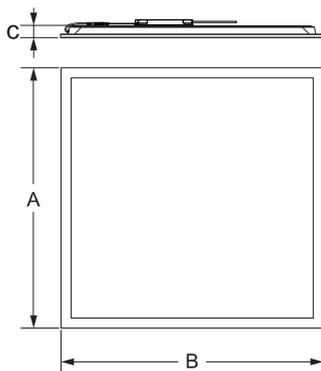





Model Name	A(mm)	B(mm)	C(mm)
Sq595	595	595	32
Sq620	620	620	34
Re295	295	1195	32

## Recessed Installation (Lay-in)

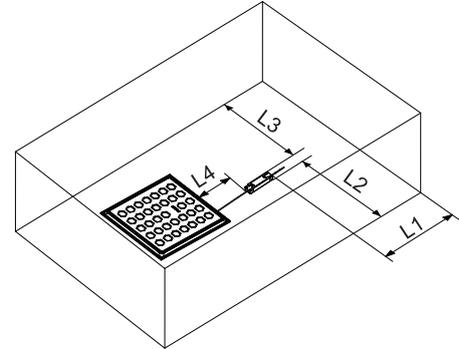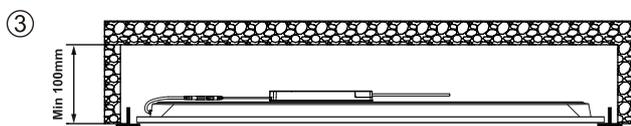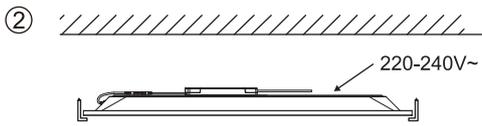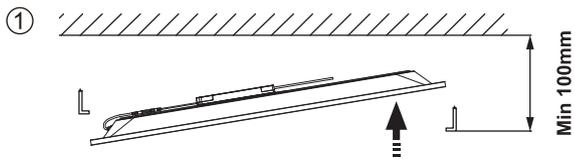

Type	L1(mm)	L2(mm)	L3(mm)	L4(mm)
SQ595				
SQ620	≥500	≥500	≥500	≤450
RE295				


## Recessed Installation (Mounting springs)

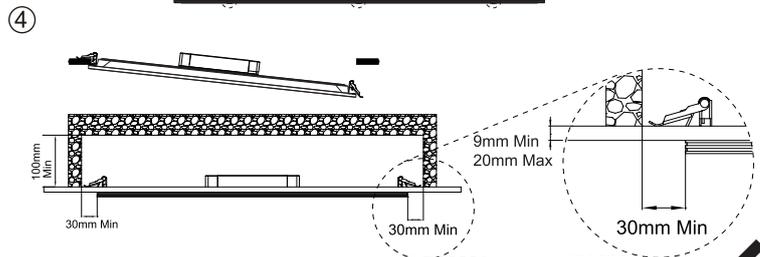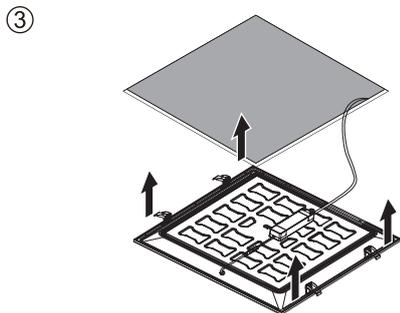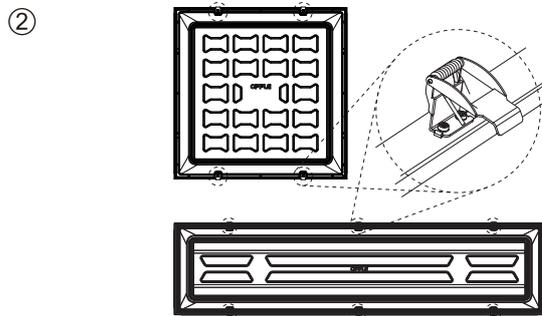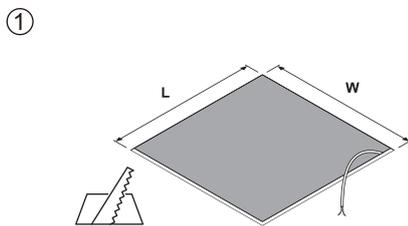


Panel LED 595×595 L 580mm W 580mm x4 x8

Panel LED 295×1195 L 280mm W 1180mm x6 x12

## Recessed Installation (Mounting springs)

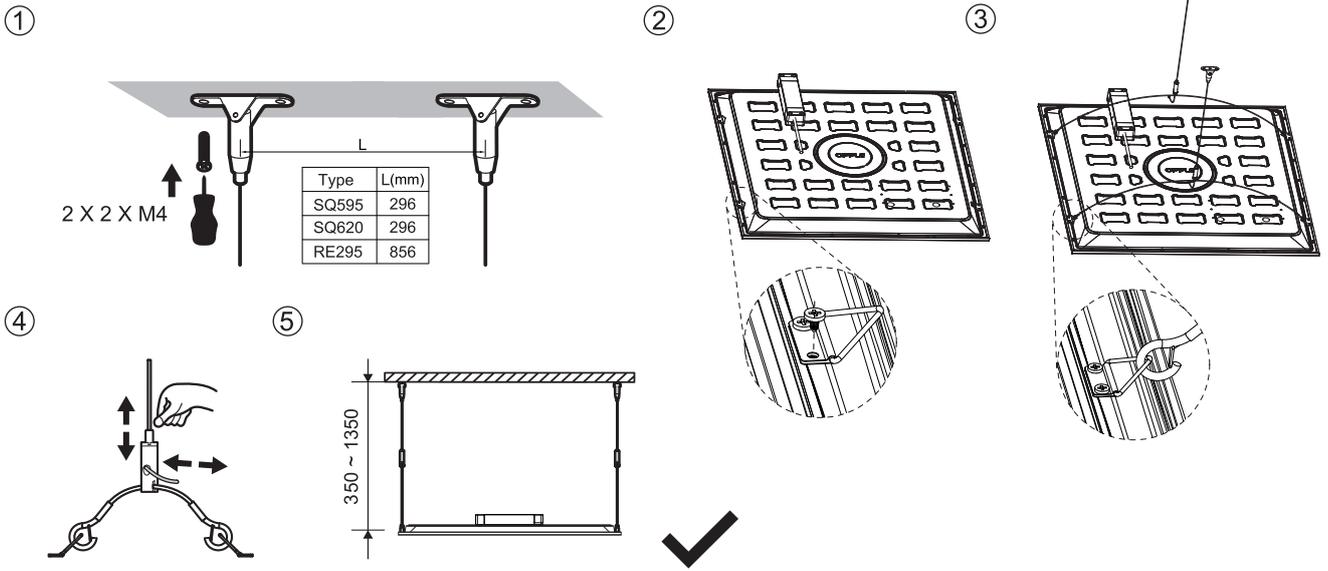

## Wiring Connection

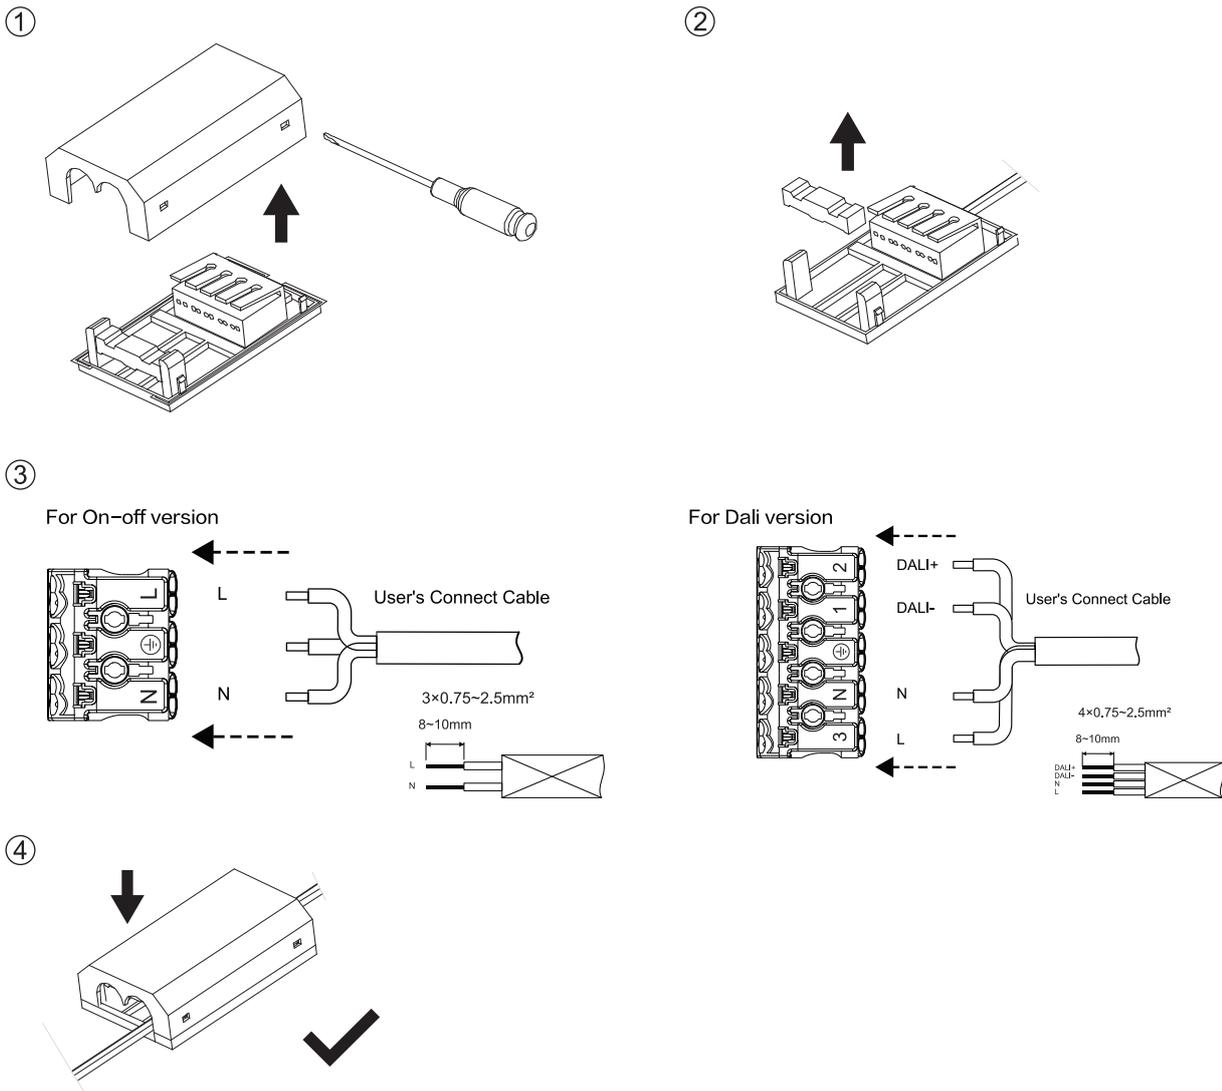


## LED drivers

### On-off version (Power selection)



Output Current (mA)	Rated Wattage (W)	Lumen (lm)
950	34	4420
850	31	4030
750	27	3510
650 (default)	23	2990

### Dali version (Touch Dim Function)

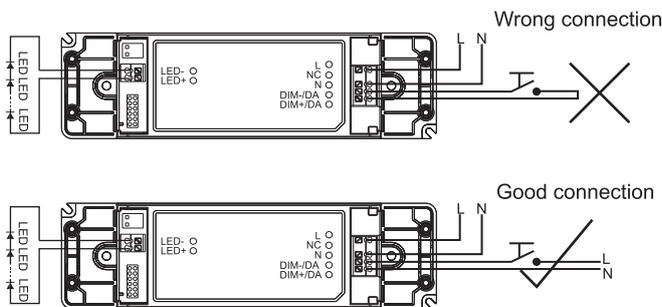


Function	Contact Duration	Reaction
Ignore	< 50ms	Nothing
Short Push	50-500ms	Turn on or off
Long Push	> 500ms	Dimming up or down
Synchronisation	10s	Go to SYNC level, 50%
	20s	Go to SYNC level, 100%

Touch Dim Terminal Consumption: Typical 3mA(220V).

Warning: TD function and DALI function can't be used at the same time, avoid damaging the DALI system by high voltage.

### Quick Connection

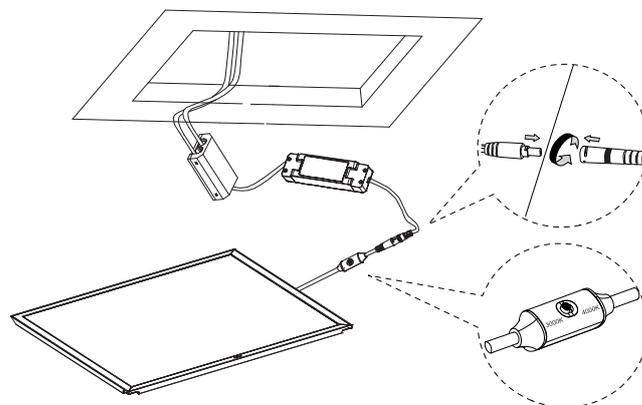


Note: CCT switch is only for double CCT version, the default setting is 4000K.

## Caution

The luminaire is only suitable for safety extra low voltage supply (<50Va.c.; <120Vd.c.).  
 The controlgear for the connection panel should be SELV.  
 It must be basic insulation between FELV and SELV, as is FELV and LV supply for 1-10V and DALI type.  
 The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.






Caution: Any operation on the LED module is strictly forbidden while the power is on.  
 Defective wiring must only be replaced by the manufacturer, distributor, or a qualified technician.  
 Achtung: Arbeiten am LED-Modul sind während des Betriebs strikt verboten.  
 Defekte Leitungen dürfen ausschließlich vom Hersteller, Händler oder einer qualifizierten Fachkraft ausgetauscht werden.



This luminaire is not suitable for covering with thermally insulating materials.  
 If the wiring is damaged, it must be replaced by the manufacturer, distributor, or a qualified expert to avoid risks.  
 Diese Leuchte ist nicht für die Abdeckung mit thermisch isolierenden Materialien geeignet.  
 Im Falle eines Drahtschadens darf dieser nur vom Hersteller, Händler oder einer qualifizierten Fachkraft ersetzt werden, um Risiken zu vermeiden.

For type Y attachments:  
 If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

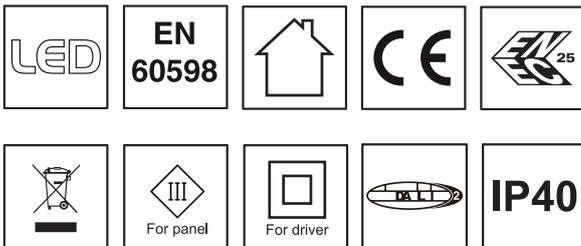

Data subject to change  
 Les données sont sujettes à modifications  
 Änderungen vorbehalten

OPPLE Lighting Co., Ltd.  
 Room 411, Building 1 No. 6111,  
 Longdong Avenue, Pudong New District,  
 Shanghai City 201201, P. R. China  
[www.opple.com](http://www.opple.com)

Opplle Lighting B.V.  
 Meerenakkerweg 1-07  
 5652 AR Eindhoven  
 The Netherlands  
[service@opple.com](mailto:service@opple.com)