

# Single-pole, potential-free, 1-channel, flush-mounting RF receiver

05-332

4 year warranty

This flush-mounting receiver is used to control a bell, dimmer, motors ... It has a 6 A potential-free switch contact. You can choose from 3 modes for the on/off functions.

## Technical data


Single-pole, potential-free, 1-channel, flush-mounting RF receiver

- One single-pole potential-free switching contact 6 A
- Choose from 3 modes for the on/off functions
- Max. 32 transmitters per receiver
- Power supply: 230 V 50 Hz
- Max. transmission range in a building: 30 m
- Max. transmission range in open field: 100 m
- Modulation type: FSK
- Not compatible with the wireless bridge
- Maximum MCB rating: 6 A (limited by national installation rules)
- Communication protocol: Easywave
- Operating frequency: 868.3 GHz
- Weight: 53 g
- Dimensions (HxWxD): 49 x 70 x 29 mm
- Marking: CE



CE

## Wiring diagram

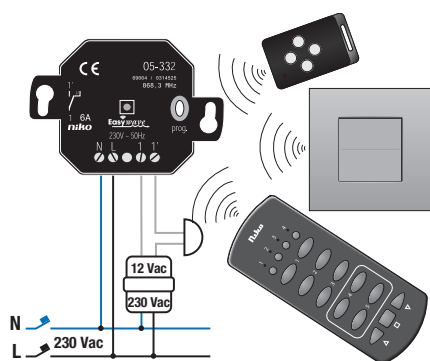

[www.niko.eu](http://www.niko.eu)

**niko**

05-332 - 27-06-2023