
LED CORN LAMP WITH INTEGRAL DRIVER



Using LED as a replacement for HID lighting, provides an easy to install cost effective solution saving up to 75% on existing lighting and compared to sodium lighting a more natural white light compared to the orange glow of sodium. As LED is instant strike and re strike, there is no warm up time to full light output.

For use with open fittings such as low bay and high bay fittings the lamp is supplied with an integral driver and installation is a simple case of by passing the control gear and inserting the lamp.

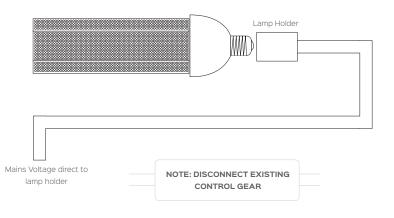

CODE	PRODUCT DESCRIPTION	WATTAGE	BEAM ANGLE	LUMENS	ССТ	DIMENSIONS
LED-COB2070-E27CW	20 watt CORN Lamp	20w	360°	2400lm	6000k	170 x 73
LED-COB3070-E27CW	30 watt CORN Lamp	30w	360°	3600lm	6000k	210 x 90
LED-COB4070-E27CW	40 watt CORN Lamp	40w	360°	5000lm	6000k	255 x 90
LED-COB4070-E40CW	40 watt CORN Lamp	40w	360°	5000lm	6000k	255 x 90
LED-COB6070-E40CW	60 watt CORN Lamp	60w	360°	7300lm	6000k	270 x 90
LED-COB8070-E40CW	80 watt CORN Lamp	80w	360°	10300lm	6000k	290 x 105
LED-COB10070-E40CW	100 watt CORN Lamp	100w	360°	13000lm	6000k	310 x 105
LED-COB12070-E40CW	120 watt CORN Lamp	120w	360°	16500lm	6000k	335 x 112