


Data Sheet | Item Number: 267-510/002-000

Male connector with connect. for ground; without ground contact; 7-pole; white

<https://www.wago.com/267-510/002-000>



Color: white

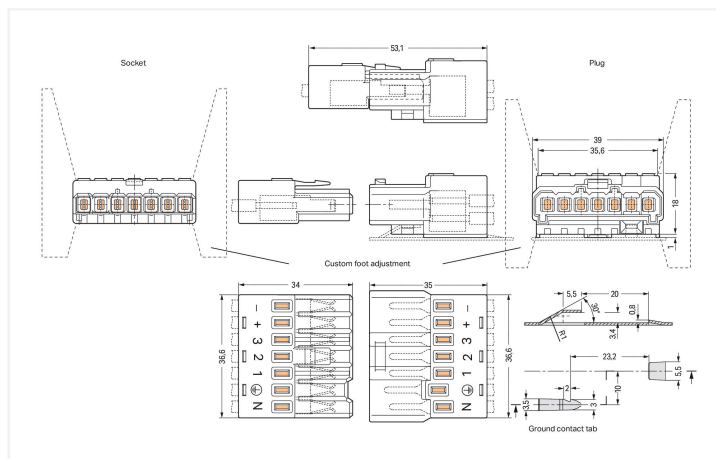

Dimensions in mm

Electrical data

Ratings per	IEC/EN 61984		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated surge voltage	-	4 kV	-
Rated current	-	16 A	-

Connection data

Number of connection types	1
----------------------------	---

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.293 MJ
Weight	19.4 g

Environmental requirements

Temperature stability	105 °C
-----------------------	--------



Commercial data		
Product Group	8 (Misc. Chassis Mount Blocks)	
eCl@ss 10.0	27-44-03-14	
eCl@ss 9.0	27-44-03-14	
ETIM 9.0	EC002560	
ETIM 8.0	EC000458	
PU (SPU)	50 pcs	
Packaging type	Box	
Country of origin	PL	
GTIN	4044918546744	
Customs tariff number	85366990990	

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171

Downloads			
Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	