



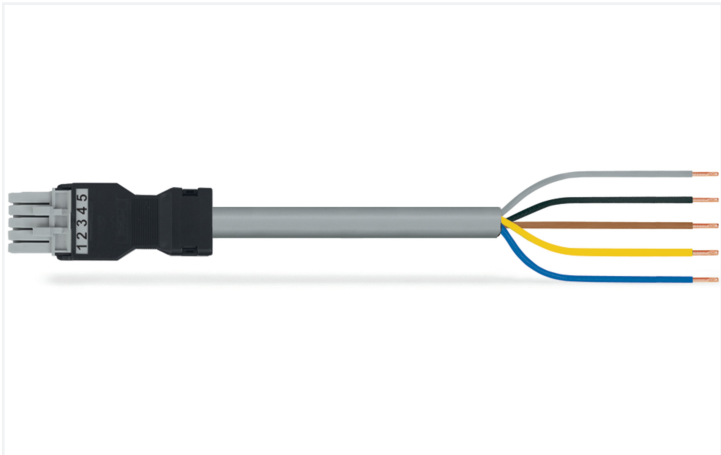

Color: ■ gray

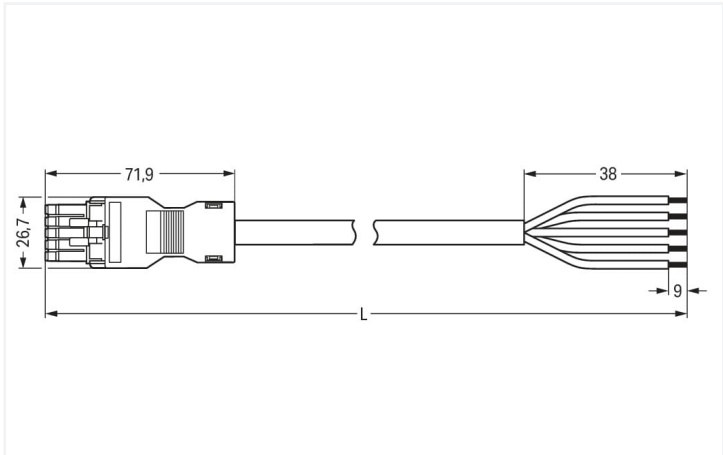

Dimensions in mm

Cable assembly WINSTA® MINI rated current 10 A

The WINSTA® MINI cable assembly with protection against mismatching allows assembly of solid and fine-stranded conductors. The pluggable installation connectors with spring pressure connection technology function completely without screw connections. They allow fast, efficient, error-free installation in a large number of applications. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The pluggable installation connector offers protection against contact with tools or wires if they are smaller than 1 mm in accordance with protection type IP40. B coding enables the WINSTA® MINI pluggable installation connectors to be used for application control in the domains of automation, mechanical engineering and robotics. Where space is tight, our smallest pluggable connection system, WINSTA® MINI, conveniently displays its strengths. It is very compact, and, with Push-in CAGE CLAMP® spring pressure connection technology, it additionally can be installed quickly, since the connection is low-maintenance and can be performed without screw connections. Of course, the safety of buildings must always be ensured, even after the electrical installation has been performed. The mandatory safety requirements in connection with EU CPR are fully satisfied by this product through fire class E.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a free end. The WINSTA® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and installation errors at the construction site. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with fire class E from WAGO.

- pluggable installation connectors with protection against mismatching
- easy tool-free operation, a wide range of coding options
- with B coding for use in automation of processes, such as lighting technology, for example
- flexible installation to save space
- convenient installation and commissioning

| Notes     |                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note      | Cables with a different fire class can be found in the eShop.                                                                                                                       |
| Variants: | Other pole markings<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |

| Electrical data            |  |                                                                                       |     |    |
|----------------------------|--|---------------------------------------------------------------------------------------|-----|----|
| Ratings per                |  | IEC/EN 60664-1                                                                        |     |    |
| Overvoltage category       |  | III                                                                                   | III | II |
| Pollution degree           |  | 3                                                                                     | 2   | 2  |
| Nominal voltage            |  | 400 V                                                                                 | -   | -  |
| Rated surge voltage        |  | 6 kV                                                                                  | -   | -  |
| Rated current              |  | 10 A                                                                                  | -   | -  |
| General information        |  |                                                                                       |     |    |
| Note on contact resistance |  | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/ socket |     |    |



| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 5                         | Connection 1                    |                    |
| Conductor preparation      | ultrasonically tip-bonded | Strip length                    | 9 mm / 0.35 inches |
|                            |                           | Pole number                     | 5                  |
|                            |                           | Wire cross-section              | 1 mm²              |
|                            |                           | Strip length (outer insulation) | 38 mm              |
|                            |                           | Connection type                 | Socket - free end  |

| Physical data |  |                        |  |
|---------------|--|------------------------|--|
| Pin spacing   |  | 4.4 mm / 0.173 inches  |  |
| Width         |  | 26.7 mm / 1.051 inches |  |
| Height        |  | 15.8 mm / 0.622 inches |  |
| Total length  |  | 8 m                    |  |

| Mechanical data                         |  |                                                               |  |
|-----------------------------------------|--|---------------------------------------------------------------|--|
| Use                                     |  | Control technology                                            |  |
| Coding                                  |  | B                                                             |  |
| Variable coding                         |  | No                                                            |  |
| Marking                                 |  | 1 2 3 4 5                                                     |  |
| Potential marking                       |  | 1 2 3 4 5                                                     |  |
| Mating force of a plug-in connection    |  | approx. 20 ... 70 N (depending on pole number)                |  |
| Retention force of a plug-in connection |  | when locked: > 80N                                            |  |
| Unmating force of a plug-in connection  |  | when unlocked: approx. 20 ... 70 N (depending on pole number) |  |
| Number of mating cycles                 |  | 200, without resistive load                                   |  |
| Connection type                         |  | Socket - free end                                             |  |
| Type of pre-assembled cable             |  | Connecting cable                                              |  |
| Cable type                              |  | H05VV-F 5x1                                                   |  |
| Protection type                         |  | IP40                                                          |  |

| Plug-in connection            |  |                                                                                                                                                                                                                                                                                                                  |  |
|-------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Mismating protection          |  | Yes                                                                                                                                                                                                                                                                                                              |  |
| Note on mismating protection  |  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |  |
| Locking lever                 |  | Can be retrofitted                                                                                                                                                                                                                                                                                               |  |
| Locking of plug-in connection |  | Locking lever                                                                                                                                                                                                                                                                                                    |  |
| Note on locking system        |  | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |  |

| Material data                      |  |                                                                          |  |
|------------------------------------|--|--------------------------------------------------------------------------|--|
| Note (material data)               |  | <a href="#">Information on material specifications can be found here</a> |  |
| Color                              |  | gray                                                                     |  |
| Insulation material (main housing) |  | Polyamide (PA66)                                                         |  |
| Fire class per EN 50575            |  | E <sub>ca</sub>                                                          |  |
| Contact material                   |  | Copper or copper alloy; surface-treated                                  |  |
| Contact Plating                    |  | Tin                                                                      |  |
| Fire load                          |  | 0.363 MJ                                                                 |  |
| Connector color                    |  | gray                                                                     |  |
| Strain relief color                |  | black                                                                    |  |



| Material data                    |            |
|----------------------------------|------------|
| Sheathed cable color             | gray       |
| Printing color of sheathed cable | black      |
| Halogen-free                     | No         |
| Silicon-free                     | Yes        |
| Sheath material                  | PVC        |
| Rubber cable                     | No         |
| Weight                           | 906.3 g    |
| Copper weight of the pipe        | 0.048 kg/m |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | PL            |
| GTIN                  | 4055143517638 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

| Downloads                                            |  |
|------------------------------------------------------|--|
| Environmental Product Compliance                     |  |
| Compliance Search                                    |  |
| Environmental Product Compliance<br>891-8995/105-803 |  |

| Documentation    |            |                 |  |
|------------------|------------|-----------------|--|
| Bid Text         |            |                 |  |
| 891-8995/105-803 | 19.02.2019 | xml<br>2.99 KB  |  |
| 891-8995/105-803 | 12.03.2015 | doc<br>25.00 KB |  |

CAD/CAE-Data

CAE data

EPLAN Data Portal  
891-8995/105-803

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)  
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)  
Locking lever; for manual operation; black



[Item No.: 890-121](#)  
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2003](#)  
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 890-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black



[Item No.: 890-311](#)  
Mounting carrier; 2- to 5-pole; for flying leads; white