



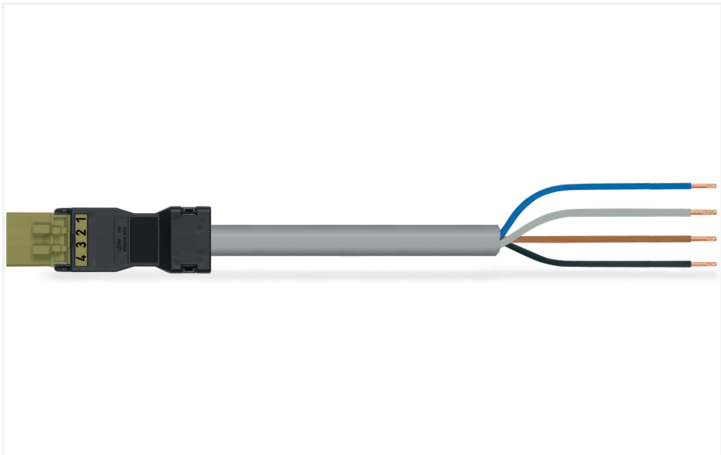

Color: ■ light green

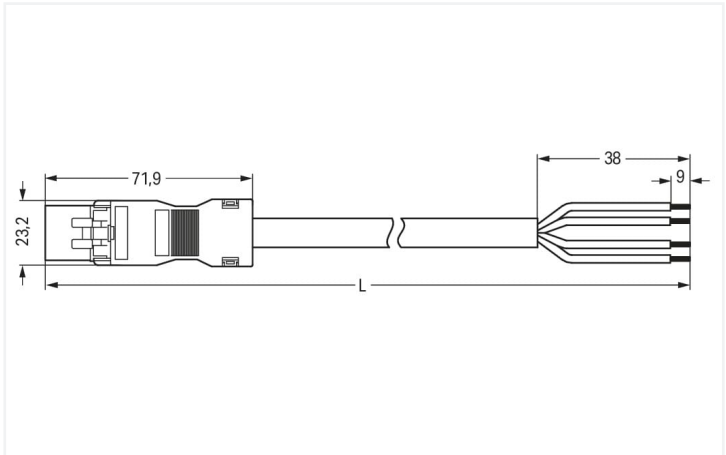

Dimensions in mm

Cable assembly WINSTA® MINI with protection type IP20

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MINI cable assembly with protection type IP20. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to establish connections according to various requirements in next to no time. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. Solutions like the WINSTA® MINI pluggable installation connectors with B coding are suitable for applications related to process control, such as for lighting or within data networks. WINSTA® MINI satisfies the demand for miniaturisation. Our smallest pluggable connection system is especially suitable for lights, for example, since due to LED technology, these offer significantly less space for the connection technology. This product meets all the mandatory safety requirements of fire class E; as a result it can be used in domains where fire safety is relevant.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable is pre-assembled with a plug and a free end. WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It offers fast, secure and, above all, error-free installation of components and cables. Now you can also cut installation expenses without compromising quality and safety: with protection type IP20 reduces the need for servicing and prevents unnecessary downtime.

- effective protection against mismating
- compact design for conductors with a cross-section up to 1.5 mm²
- with B coding for use in process automation, such as lighting technology, among other examples
- custom-engineered solutions
- quick replacement of defective units during ongoing operation

| Notes     |                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note      | Cables with a different fire class can be found in the eShop.                                                                                                                       |
| Variants: | Other pole markings<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |

| Electrical data            |  |                                              |     |    |
|----------------------------|--|----------------------------------------------|-----|----|
| Ratings per                |  | IEC/EN 60664-1                               |     |    |
| Overvoltage category       |  | III                                          | III | II |
| Pollution degree           |  | 3                                            | 2   | 2  |
| Nominal voltage            |  | 400 V                                        | -   | -  |
| Rated surge voltage        |  | 6 kV                                         | -   | -  |
| Rated current              |  | 16 A                                         | -   | -  |
| Ratings per IEC/EN – Notes |  |                                              |     |    |
| Rated current (note)       |  | 13 A for 3-pole load<br>10 A for 4-pole load |     |    |

### General information

|                            |                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------|
| Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/<br>socket |
|----------------------------|------------------------------------------------------------------------------------------|

### Connection data

|                            |                           |                                 |                     |
|----------------------------|---------------------------|---------------------------------|---------------------|
| Total number of potentials | 4                         | <b>Connection 1</b>             |                     |
| Conductor preparation      | ultrasonically tip-bonded | Strip length                    | 9 mm / 0.35 inches  |
|                            |                           | Pole number                     | 4                   |
|                            |                           | Wire cross-section              | 1.5 mm <sup>2</sup> |
|                            |                           | Strip length (outer insulation) | 38 mm               |
|                            |                           | Connection type                 | Plug - free end     |

### Physical data

|              |                        |
|--------------|------------------------|
| Pin spacing  | 4.4 mm / 0.173 inches  |
| Width        | 23.2 mm / 0.913 inches |
| Height       | 16 mm / 0.63 inches    |
| Total length | 1 m                    |

### Mechanical data

|                                         |                                                               |
|-----------------------------------------|---------------------------------------------------------------|
| Use                                     | Control technology                                            |
| Coding                                  | B                                                             |
| Variable coding                         | No                                                            |
| Marking                                 | 1 2 3 4                                                       |
| Potential marking                       | 1 2 3 4                                                       |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                |
| Retention force of a plug-in connection | when locked: > 80N                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number) |
| Number of mating cycles                 | 200, without resistive load                                   |
| Connection type                         | Plug - free end                                               |
| Type of pre-assembled cable             | Connecting cable                                              |
| Cable type                              | Control line 4x1.5                                            |
| Protection type                         | IP20; IP40 when mated                                         |

### Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                        |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                      |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | light green                                                              |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Fire class per EN 50575            | E <sub>ca</sub>                                                          |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 0.319 MJ                                                                 |
| Connector color                    | light green                                                              |
| Strain relief color                | black                                                                    |
| Sheathed cable color               | gray                                                                     |
| Printing color of sheathed cable   | black                                                                    |
| Halogen-free                       | No                                                                       |
| Silicon-free                       | Yes                                                                      |
| Sheath material                    | PVC                                                                      |
| Rubber cable                       | No                                                                       |
| Weight                             | 117.6 g                                                                  |
| Copper weight of the pipe          | 0.058 kg/m                                                               |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | PL            |
| GTIN                  | 4050821622840 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

| Downloads                                            |  |
|------------------------------------------------------|--|
| Environmental Product Compliance                     |  |
| Compliance Search                                    |  |
| Environmental Product Compliance<br>891-8994/206-105 |  |



Documentation

|                  |            |                 |  |
|------------------|------------|-----------------|--|
| Bid Text         |            |                 |  |
| 891-8994/206-105 | 19.02.2019 | xml<br>3.01 KB  |  |
| 891-8994/206-105 | 02.12.2014 | doc<br>25.50 KB |  |

CAD/CAE-Data

|                                       |  |
|---------------------------------------|--|
| CAE data                              |  |
| EPLAN Data Portal<br>891-8994/206-105 |  |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)  
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)  
Locking lever; for manual operation; black



[Item No.: 890-121](#)  
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2003](#)  
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 890-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black



[Item No.: 890-311](#)  
Mounting carrier; 2- to 5-pole; for flying leads; white