




Color: ■ red

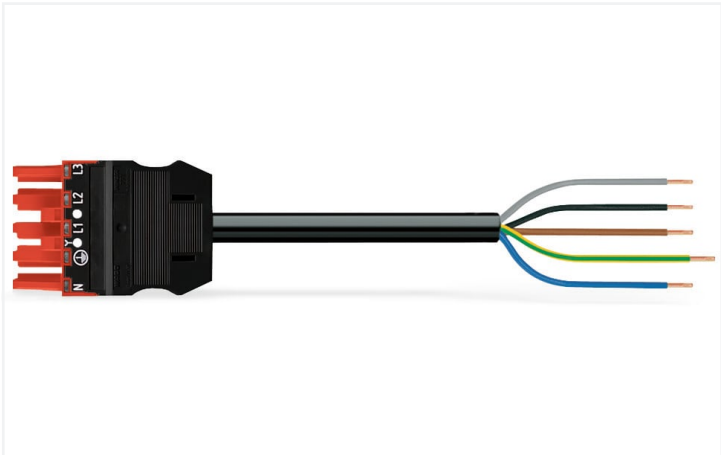

Dimensions in mm

Cable assembly WINSTA® MIDI P coding

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MIDI cable assembly rated current 20 A. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to a huge variety of requirements in no time flat. For greater security in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismating. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with energised elements. WINSTA® MIDI pluggable installation connectors with P coding are utilised for implementing uninterruptible power supplies. This pluggable installation connector can be used for a current load of up to 20 A. Therefore, it can also be used for high power loads. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Due to the integrated test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs. Building safety must be ensured at all times, even after the electrical installation stage. The mandatory safety requirements in connection with EU CPR are fully satisfied by this product through fire class E.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable assembly is equipped with a socket and a free end. The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and therefore faster, even more reliable, and error-free. Use of this pre-assembled system reduces time spent on assembly and errors during installation at the construction site. Now you can also cut installation costs without compromising safety and quality: with fire class E eliminates the need for servicing and prevents unnecessary downtime.

- pluggable installation connectors with protection against mismating
- simple circuits
- for UPS applications
- flexible installation to save space
- fast, secure installation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 400 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 6 kV           | -   | -  |                                                 |  |
| Rated current        |  | 20 A           | -   | -  |                                                 |  |



| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 5                         | <b>Connection 1</b>             |                    |
| PE function                | Preceding PE contact      |                                 |                    |
| Conductor preparation      | ultrasonically tip-bonded |                                 |                    |
|                            |                           |                                 |                    |
|                            |                           |                                 |                    |
|                            |                           |                                 |                    |
|                            |                           | Strip length                    | 9 mm / 0.35 inches |
|                            |                           | Pole number                     | 5                  |
|                            |                           | Sheathed cable diameter         | 11.2 ... 13.9 mm   |
|                            |                           | Wire cross-section              | 2.5 mm²            |
|                            |                           | Strip length (outer insulation) | 55 mm              |
|                            |                           | Connection type                 | Socket - free end  |

| Physical data |  |                         |
|---------------|--|-------------------------|
| Pin spacing   |  | 10 mm / 0.394 inches    |
| Width         |  | 47 mm / 1.85 inches     |
| Height        |  | 15.38 mm / 0.606 inches |
| Total length  |  | 7 m                     |

| Mechanical data                         |  |                                                                                                               |
|-----------------------------------------|--|---------------------------------------------------------------------------------------------------------------|
| Use                                     |  | EDV (UPS)                                                                                                     |
| Coding                                  |  | P                                                                                                             |
| Variable coding                         |  | No                                                                                                            |
| Marking                                 |  | N L1 L2 L3                                                                                                    |
| Potential marking                       |  | N L1 L2 L3                                                                                                    |
| Mating force of a plug-in connection    |  | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection |  | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  |  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 |  | 200, without resistive load                                                                                   |
| Connection type                         |  | Socket - free end                                                                                             |
| Type of pre-assembled cable             |  | Connecting cable                                                                                              |
| Cable type                              |  | H05VV-F 5G2.5                                                                                                 |
| Protection type                         |  | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

| Plug-in connection            |  |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          |  | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  |  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 |  | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection |  | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        |  | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                      |  |                                                                          |
|------------------------------------|--|--------------------------------------------------------------------------|
| Note (material data)               |  | <a href="#">Information on material specifications can be found here</a> |
| Color                              |  | red                                                                      |
| Insulation material (main housing) |  | Polyamide (PA66)                                                         |
| Fire class per EN 50575            |  | E <sub>ca</sub>                                                          |
| Contact material                   |  | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    |  | Tin                                                                      |
| Fire load                          |  | 210.118 MJ                                                               |
| Connector color                    |  | red                                                                      |
| Strain relief color                |  | black                                                                    |
| Printing color of strain relief    |  | white                                                                    |
| Sheathed cable color               |  | black                                                                    |
| Printing color of sheathed cable   |  | white                                                                    |
| Halogen-free                       |  | No                                                                       |
| Silicon-free                       |  | Yes                                                                      |
| Sheath material                    |  | PVC                                                                      |
| Rubber cable                       |  | No                                                                       |
| Weight                             |  | 1718.7 g                                                                 |
| Copper weight of the pipe          |  | 0.12 kg/m                                                                |

| Environmental requirements               |  |                                                                                                       |
|------------------------------------------|--|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   |  | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         |  | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature |  | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data |  |               |
|-----------------|--|---------------|
| eCl@ss 10.0     |  | 27-44-06-04   |
| eCl@ss 9.0      |  | 27-44-06-04   |
| ETIM 8.0        |  | EC002587      |
| ETIM 7.0        |  | EC002587      |
| PU (SPU)        |  | 1 pcs         |
| Packaging type  |  | Box           |
| GTIN            |  | 4045454433260 |

| Environmental Product Compliance |  |                         |
|----------------------------------|--|-------------------------|
| RoHS Compliance Status           |  | Compliant, No Exemption |

| Approvals / Certificates                                |          |                                                            |
|---------------------------------------------------------|----------|------------------------------------------------------------|
| General approvals                                       |          | Declarations of conformity and manufacturer's declarations |
|                                                         |          |                                                            |
| Approval                                                | Standard | Certificate Name                                           |
| CCA<br>DEKRA Certification B.V.                         | EN 61535 | NTR NL-7972                                                |
| KEMA/KEUR<br>DEKRA Certification B.V.                   | EN 61535 | 71-123834                                                  |
| Approval                                                | Standard | Certificate Name                                           |
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |



Downloads

Environmental Product Compliance

|                                  |  |  |   |
|----------------------------------|--|--|---|
| Compliance Search                |  |  |   |
| Environmental Product Compliance |  |  | ↓ |
| 771-9975/107-701                 |  |  |   |

Documentation

|                  |            |                 |   |
|------------------|------------|-----------------|---|
| Bid Text         |            |                 |   |
| 771-9975/107-701 | 19.02.2019 | xml<br>2.98 KB  | ↓ |
| 771-9975/107-701 | 11.12.2014 | doc<br>26.50 KB | ↓ |

CAD/CAE-Data

|                  |  |  |   |
|------------------|--|--|---|
| CAE data         |  |  |   |
| WSCAD Universe   |  |  | ↓ |
| 771-9975/107-701 |  |  |   |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 770-101](#)  
Locking lever; for flying leads; for manual operation; black



[Item No.: 770-121](#)  
Locking lever; for flying leads; for manual operation; white



[Item No.: 770-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 770-131](#)  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-201](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



[Item No.: 770-221](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



[Item No.: 897-2005](#)  
Protective cap; Type4; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white