




This item includes:				
				
Item No.: 221-412 Splicing connector with levers; for all conductor types; max. 4 mm²; 2-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent	Item No.: 221-413 Splicing connector with levers; for all conductor types; max. 4 mm²; 3-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent	Item No.: 221-415 Splicing connector with levers; for all conductor types; max. 4 mm²; 5-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent	Item No.: 221-613 Splicing connector with levers; for all conductor types; max. 6 mm²; 3-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm²; transparent	30

Notes	
Safety management note	NOTICE: Observe installation and safety instructions! - Only to be used by electricians! - Do not work under voltage/load! - Use only for proper use! - Observe national regulations/standards/guidelines! - Observe technical specifications for the products! - Observe the number of permissible potentials! - Do not use damaged/dirty components! - Observe conductor types, cross-sections and strip lengths! - Insert conductor until it hits the product's backstop! - Use original accessories! To be sold only with installation instructions!

Physical data	
Width	259 mm / 10.197 inches
Height	63 mm / 2.48 inches
Depth	155 mm / 6.102 inches

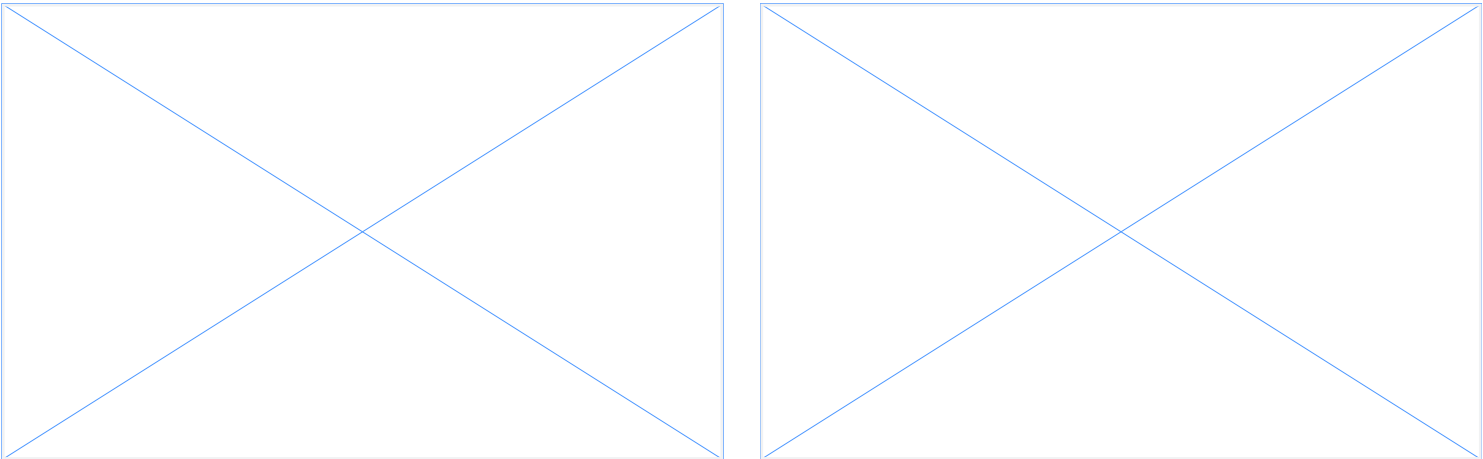

Material data		
Note (material data)		Information on material specifications can be found here
Fire load		16.345 MJ
Weight		918.2 g

Commercial data		
eCl@ss 10.0		27-14-11-04
eCl@ss 9.0		27-14-11-04
ETIM 8.0		EC000446
ETIM 7.0		EC000446
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		DE
GTIN		4055143781626
Customs tariff number		85369010000

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 887-959

↓