
Data Sheet | Item Number: 887-957

Splicing Connector Set; L-BOXX® Mini; 221 Series - 4mm² and 6mm²

https://www.wago.com/887-957





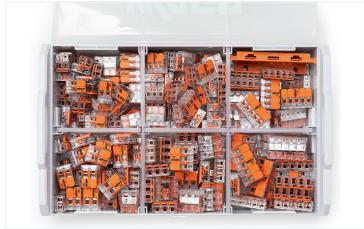

This item includes:

Item No.: 221-412





4,00 mm²; transparent

Item No.: 221-613

Item No.: 221-415

Splicing connector with levers; for all conductor types; max. 4 mm²; 5-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85);

4,00 mm²; transparent

Item No.: 221-615

15

Item No.: 221-500

Mounting carrier; 221 Series - 4 mm²; for DIN-35 rail mounting/screw mounting; orange

ductor types; max. 4 mm²; 2-conductor; with levers; transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent

Splicing connector with levers; for all con-



Splicing connector with levers; for all conductor types; max. 6 mm²; 3-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm²; transparent

Splicing connector with levers; for all

conductor types; max. 4 mm²; 3-conduc-

tor; with levers; transparent housing; Sur-

rounding air temperature: max 85°C (T85);

Splicing connector with levers; for all conductor types; max. 6 mm²; 5-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm²; transparent





ductor types; max. 6 mm²; 2-conductor; transparent housing; Surrounding air temperature: max 85°C (T85); 6,00 mm²;



transparent

Safety management note

NOTICE: Observe installation and safety instructions!

- Only to be used by electricians!
- Do not work under voltage/load!
- · Use only for proper use!
- Observe national regulations/standards/guidelines!
- Observe technical specifications for the products!
- Observe the number of permissible potentials!
- Do not use damaged/dirty components!
- Observe conductor types, cross-sections and strip lengths!
- Insert conductor until it hits the product's backstop!
- Use original accessories!

To be sold only with installation instructions!

Data Sheet | Item Number: 887-957

https://www.wago.com/887-957



 Physical data

 Width
 259 mm / 10.197 inches

 Height
 63 mm / 2.48 inches

 Depth
 155 mm / 6.102 inches

Material data

Note (material data)

Information on material specifications can be found here

Fire load

Weight

996.4 g

Commercial data eCl@ss 10.0 27-14-11-04 eCl@ss 9.0 27-14-11-04 ETIM 8.0 EC000446 ETIM 7.0 EC000446 PU (SPU) 1 pcs Box Packaging type Country of origin DE **GTIN** 4055143739160 Customs tariff number 85369010000

Environmental Product Compliance RoHS Compliance Status Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 887-957



Subject to changes. Please also observe the further product documentation!

Current addresses can be found at:: $\underline{www.wago.com}$

Page 2/2 Version 07.06.2024