




Similar to illustration

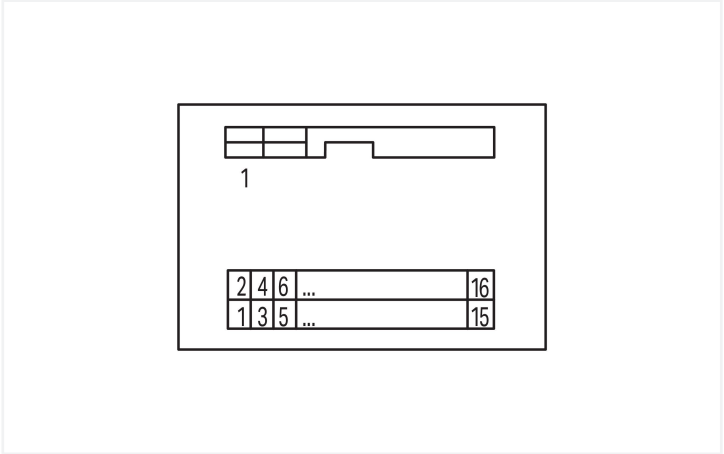

Electrical data

Operating voltage	≤ 125 VAC/VDC
Nominal current	1 A

Safety and protection

Rated Voltage	125 V
Rated impulse withstand voltage	0.8 kV
Pollution degree	2
Protection type	IP20
Insulation type	Basic insulation

Connection data

Performance level	3 / 50 mating cycles
Connection 1	
Pluggable connector	DIN 41651 connector; male connector
Pole number 1	10
Connection type 1	System
Note (conductor cross-section)	12 AWG: THHN, THWN
Mating direction	vertical

Connection 2

Design 2	PCB terminal blocks (double-deck)
Pole number 2	10
Connection type	Field
Connection technology	CAGE CLAMP®
WAGO connector 2	WAGO 736 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches



Physical data		
Width		35 mm / 1.378 inches
Height		85 mm / 3.346 inches
Depth from upper-edge of DIN-rail		48 mm / 1.89 inches

Mechanical data		
Mounting type		DIN-35 rail
Housing design		Mounting carrier

Material data		
Contact material (connector)		Au over Ni
Fire load		0.859 MJ
Weight		46.9 g

Environmental requirements		
Ambient temperature (operation)		-20 ... +55 °C
Ambient temperature (storage)		-40 ... +70 °C
Relative humidity		≤ 85 % (non-condensing)

Standards and specifications		
Standards/specifications		EN 61010-2-201

Commercial data		
Product Group		6 (INTERFACE ELECTRONIC)
eCl@ss 10.0		27-14-11-52
eCl@ss 9.0		27-14-11-52
ETIM 9.0		EC002780
ETIM 8.0		EC002780
PU (SPU)		10 (1) pcs
Packaging type		Box
Country of origin		DE
GTIN		4045454471200
Customs tariff number		85366990990

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
EAC	TP TC 004/2011	EAC CoC 03084	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
GZO Almaty Standart					



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-611

Download icon

Documentation

Bid Text

289-611	19.02.2019	xml 3.50 KB	Download icon
289-611	20.11.2015	doc 25.50 KB	Download icon

Instruction Leaflet

pdf 1246.19 KB	Download icon
-------------------	---------------

CAD/CAE-Data

CAD data

2D/3D Models 289-611

Download icon

CAE data

EPLAN Data Portal 289-611

Download icon

WSCAD Universe 289-611

Download icon

ZUKEN Portal 289-611

Download icon

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connecting cable



Item No.: 706-100/1301-200

Connection cable; 10-pole; Pluggable connector per DIN 41651; open-ended; Length: 2 m; Conductor cross-section: 0.14 mm²; UR components

1.1.1.2 System cable

Item No.: 706-2300/201-100

System cable; for Siemens S7-300; 8 digital outputs; Length: 1 m; Conductor cross-section: 0.14 mm²

Item No.: 706-2300/201-200

System cable; for Siemens S7-300; 8 digital outputs; Length: 2 m; Conductor cross-section: 0.14 mm²

Item No.: 706-2300/201-300

System cable; for Siemens S7-300; 8 digital outputs; Length: 3 m; Conductor cross-section: 0.14 mm²

Item No.: 706-7753/302-100

System cable; for WAGO-I/O-SYSTEM, 750 Series; 8 digital inputs and 8 digital outputs; Length: 1 m; Conductor cross-section: 0.14 mm²

Item No.: 706-7753/302-200

System cable; for WAGO-I/O-SYSTEM, 750 Series; 8 digital inputs and 8 digital outputs; Length: 2 m; Conductor cross-section: 0.14 mm²

Item No.: 706-7753/300-100

System cable; for WAGO-I/O-SYSTEM, 753 Series; 8 digital inputs or outputs; Length: 1 m; Conductor cross-section: 0.14 mm²

Item No.: 706-7753/300-200

System cable; for WAGO-I/O-SYSTEM, 753 Series; 8 digital inputs or outputs; Length: 2 m; Conductor cross-section: 0.14 mm²

1.1.2 Marking

1.1.2.1 Marking strip



Item No.: 709-196
Marking strips; for laser printer; translucent



Item No.: 709-177
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.3 Tool


1.1.3.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination




Conductor termination – screwdriver actuation parallel to conductor entry




Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.