




Color: ■ black

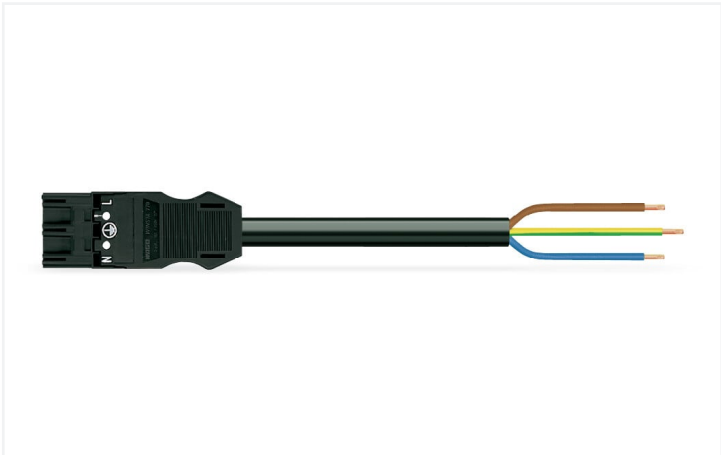

Dimensions in mm

Cable assembly WINSTA® MIDI 3-pole

The WINSTA® MIDI cable assembly with protection type IP20 is the pluggable solution for your application in control cabinets, for lighting connections or on PCBs. WAGO pluggable installation connectors can be used when criteria repeat or are distributed on a specified pattern, for example for installing grid lighting or flush-mount lighting. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). That results in the fact that users' fingers will never come into contact with energised elements. The WINSTA® MIDI pluggable installation connector with A coding in white or black is usually used for general mains applications in power distribution. The WINSTA® MIDI product line allows flexibility for the installation. Through its Push-in CAGE CLAMP® spring pressure connection technology, it ensures time-saving, error-free installation and offers flexibility for meeting an enormous variety of installation requirements. Building safety must be ensured at all times, even after the electrical installation stage. The mandatory safety requirements in connection with EU CPR are fully satisfied by this product through fire class E.

Fast, error-free assembly thanks to cable assemblies from WAGO

The cable is pre-assembled with a plug and a free end. WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Now you can also reduce installation costs without compromising safety and quality: with marking reduces the need for servicing and prevents unnecessary downtime.

- protection against mismatching eliminates errors
- for automation controllers
- suitable for any application
- custom-engineered solutions
- quick replacement of defective units during ongoing operation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |       |                |    | General information                             |  |
|----------------------|-------|----------------|----|-------------------------------------------------|--|
| Ratings per          |       | IEC/EN 60664-1 |    | Note on contact resistance                      |  |
| Overvoltage category | III   | III            | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     | 3     | 2              | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      | 250 V | -              | -  |                                                 |  |
| Rated surge voltage  | 4 kV  | -              | -  |                                                 |  |
| Rated current        | 16 A  | -              | -  |                                                 |  |



| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 3                         | Connection 1                    |                    |
| PE function                | Preceding PE contact      | Strip length                    | 9 mm / 0.35 inches |
| Conductor preparation      | ultrasonically tip-bonded | Pole number                     | 3                  |
|                            |                           | Sheathed cable diameter         | 7.4 ... 9.4 mm     |
|                            |                           | Wire cross-section              | 1.5 mm²            |
|                            |                           | Strip length (outer insulation) | 55 mm              |
|                            |                           | Connection type                 | Plug - free end    |

| Physical data |  |                        |  |
|---------------|--|------------------------|--|
| Pin spacing   |  | 10 mm / 0.394 inches   |  |
| Width         |  | 27 mm / 1.063 inches   |  |
| Height        |  | 12.9 mm / 0.508 inches |  |
| Total length  |  | 8 m                    |  |

| Mechanical data                         |  |                                                                                                               |  |
|-----------------------------------------|--|---------------------------------------------------------------------------------------------------------------|--|
| Use                                     |  | General mains applications                                                                                    |  |
| Coding                                  |  | A                                                                                                             |  |
| Variable coding                         |  | Yes                                                                                                           |  |
| Marking                                 |  | L N                                                                                                           |  |
| Potential marking                       |  | L N                                                                                                           |  |
| Mating force of a plug-in connection    |  | approx. 20 ... 70 N (depending on pole number)                                                                |  |
| Retention force of a plug-in connection |  | when locked: > 80N                                                                                            |  |
| Unmating force of a plug-in connection  |  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |  |
| Number of mating cycles                 |  | 200, without resistive load                                                                                   |  |
| Connection type                         |  | Plug - free end                                                                                               |  |
| Type of pre-assembled cable             |  | Connecting cable                                                                                              |  |
| Cable type                              |  | H05VV-F 3G1.5                                                                                                 |  |
| Protection type                         |  | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |  |

| Plug-in connection            |  |                                                                                                                                                                                                                                                                                                                  |  |
|-------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Mismating protection          |  | Yes                                                                                                                                                                                                                                                                                                              |  |
| Note on mismating protection  |  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |  |
| Locking lever                 |  | Can be retrofitted                                                                                                                                                                                                                                                                                               |  |
| Locking of plug-in connection |  | Locking lever                                                                                                                                                                                                                                                                                                    |  |
| Note on locking system        |  | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |  |



| Material data                      |                                         |                                                                          |
|------------------------------------|-----------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               |                                         | <a href="#">Information on material specifications can be found here</a> |
| Color                              | black                                   |                                                                          |
| Insulation material (main housing) | Polyamide (PA66)                        |                                                                          |
| Fire class per EN 50575            | E <sub>ca</sub>                         |                                                                          |
| Contact material                   | Copper or copper alloy; surface-treated |                                                                          |
| Contact Plating                    | Tin                                     |                                                                          |
| Fire load                          | 239.757 MJ                              |                                                                          |
| Connector color                    | black                                   |                                                                          |
| Strain relief color                | black                                   |                                                                          |
| Printing color of strain relief    | white                                   |                                                                          |
| Sheathed cable color               | black                                   |                                                                          |
| Printing color of sheathed cable   | white                                   |                                                                          |
| Halogen-free                       | No                                      |                                                                          |
| Silicon-free                       | Yes                                     |                                                                          |
| Sheath material                    | PVC                                     |                                                                          |
| Rubber cable                       | No                                      |                                                                          |
| Weight                             | 796.7 g                                 |                                                                          |
| Copper weight of the pipe          | 0.043 kg/m                              |                                                                          |

| Environmental requirements               |                                                                                                       |  |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|--|
| Processing temperature                   | -5 ... +40 °C                                                                                         |  |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |  |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |  |

| Commercial data       |               |  |
|-----------------------|---------------|--|
| Product Group         | 20 (Winsta)   |  |
| eCl@ss 10.0           | 27-44-06-04   |  |
| eCl@ss 9.0            | 27-44-06-04   |  |
| ETIM 8.0              | EC002587      |  |
| ETIM 7.0              | EC002587      |  |
| PU (SPU)              | 1 pcs         |  |
| Packaging type        | unpacked      |  |
| Country of origin     | DE            |  |
| GTIN                  | 4044918271288 |  |
| Customs tariff number | 85444290900   |  |

| Environmental Product Compliance |                         |  |
|----------------------------------|-------------------------|--|
| RoHS Compliance Status           | Compliant, No Exemption |  |

| Approvals / Certificates              |          |                                                            |
|---------------------------------------|----------|------------------------------------------------------------|
| General approvals                     |          | Declarations of conformity and manufacturer's declarations |
|                                       |          |                                                            |
| Approval                              | Standard | Certificate Name                                           |
| CCA<br>DEKRA Certification B.V.       | EN 61535 | NTR NL-7355                                                |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 61535 | 71-123834                                                  |
|                                       |          | EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    |
|                                       |          | UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    |



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance  
771-9993/206-801

↓

Documentation

Bid Text

|                  |            |                 |   |
|------------------|------------|-----------------|---|
| 771-9993/206-801 | 19.02.2019 | xml<br>2.98 KB  | ↓ |
| 771-9993/206-801 | 04.12.2014 | doc<br>25.00 KB | ↓ |

CAD/CAE-Data

CAD data

2D/3D Models  
771-9993/206-801

↓

CAE data

EPLAN Data Portal  
771-9993/206-801

↓

WSCAD Universe  
771-9993/206-801

↓

ZUKEN Portal  
771-9993/206-801

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



Item No.: 770-101  
Locking lever; for flying leads; for manual operation; black



Item No.: 770-121  
Locking lever; for flying leads; for manual operation; white



Item No.: 770-111  
Locking lever; for flying leads; for tool operation; black



Item No.: 770-131  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



Item No.: 770-360  
Lockout cap; for plugs; 5-pole; separable; yellow



Item No.: 897-2003  
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white