



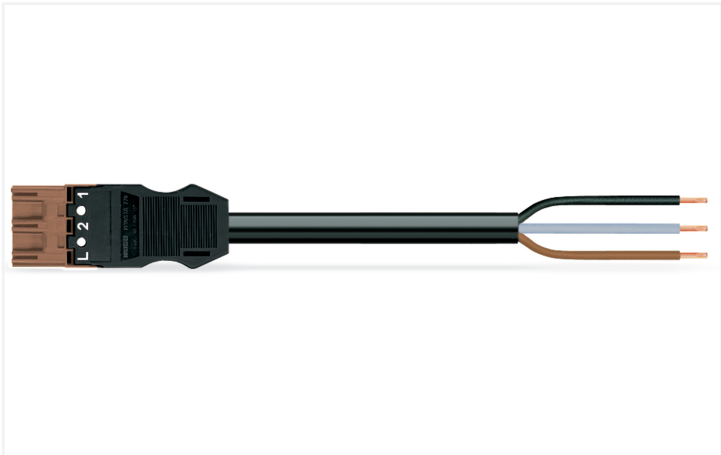

Color: ■ brown

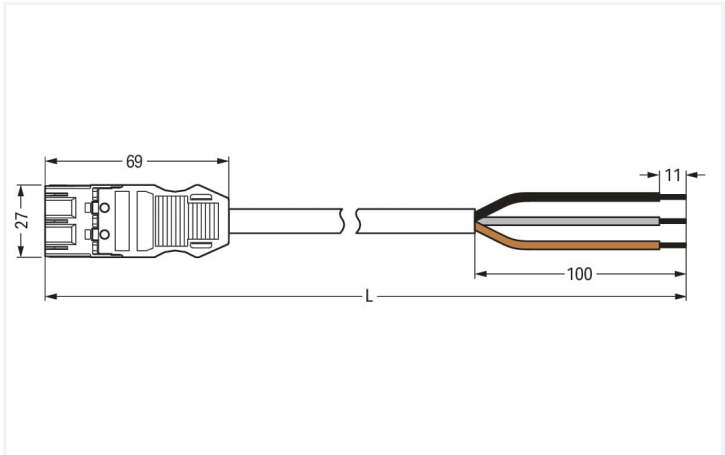

Dimensions in mm

Cable assembly WINSTA® MIDI rated current 16 A

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MIDI cable assembly S coding. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to establish connections according to many different requirements in seconds. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). WINSTA® MIDI pluggable installation connectors with S coding in brown are mostly used in AC applications. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in can be found in a variety of projects you can use for quick, easy, flexible, and secure electrical installation. Mandatory compliance with fire protection regulations is an essential issue for building installation. Especially in sensitive areas, the fire class must meet or even exceed the high standards of requirements. This product complies with the requirements of fire class B2. In the production of this cable assembly, we eliminated the use of halogen. That is an important contribution to environmental protection.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable is pre-assembled with a plug and a free end. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Choose durability and quality – with strain relief hosting from WAGO makes the electrical installation of electrical components substantially easier.

- effective protection against mismatching
- pre-assembled versions
- with S coding for use in components such as motors or frequency converters
- exact dimensions
- rapid, structured electrical installation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |       |                |    |  | General information                             |  |
|----------------------|-------|----------------|----|--|-------------------------------------------------|--|
| Ratings per          |       | IEC/EN 60664-1 |    |  | Note on contact resistance                      |  |
| Overvoltage category | III   | III            | II |  | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     | 3     | 2              | 2  |  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      | 250 V | -              | -  |  |                                                 |  |
| Rated surge voltage  | 4 kV  | -              | -  |  |                                                 |  |
| Rated current        | 16 A  | -              | -  |  |                                                 |  |

## Connection data

|                            |                           |                                 |                     |
|----------------------------|---------------------------|---------------------------------|---------------------|
| Total number of potentials | 3                         | <b>Connection 1</b>             |                     |
| Conductor preparation      | ultrasonically tip-bonded | Strip length                    | 11 mm / 0.43 inches |
|                            |                           | Pole number                     | 3                   |
|                            |                           | Wire cross-section              | 1.5 mm <sup>2</sup> |
|                            |                           | Strip length (outer insulation) | 100 mm              |
|                            |                           | Connection type                 | Plug - free end     |

## Physical data

|              |                        |
|--------------|------------------------|
| Pin spacing  | 10 mm / 0.394 inches   |
| Width        | 27 mm / 1.063 inches   |
| Height       | 12.9 mm / 0.508 inches |
| Total length | 1 m                    |

## Mechanical data

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Use                                     | Switching function                                                                                            |
| Coding                                  | S                                                                                                             |
| Variable coding                         | No                                                                                                            |
| Marking                                 | 1 2 L                                                                                                         |
| Potential marking                       | 1 2 L                                                                                                         |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Plug - free end                                                                                               |
| Type of pre-assembled cable             | Connecting cable                                                                                              |
| Cable type                              | H05Z1Z1-F 3x1.5                                                                                               |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

## Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                        |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                      |  |                                                                          |
|------------------------------------|--|--------------------------------------------------------------------------|
| Note (material data)               |  | <a href="#">Information on material specifications can be found here</a> |
| Color                              |  | brown                                                                    |
| Insulation material (main housing) |  | Polyamide (PA66)                                                         |
| Flammability class per UL94        |  | V0                                                                       |
| Fire class per EN 50575            |  | B2 <sub>ca</sub>                                                         |
| Contact material                   |  | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    |  | Tin                                                                      |
| Fire load                          |  | 0.323 MJ                                                                 |
| Connector color                    |  | brown                                                                    |
| Strain relief color                |  | black                                                                    |
| Printing color of strain relief    |  | white                                                                    |
| Sheathed cable color               |  | black                                                                    |
| Printing color of sheathed cable   |  | white                                                                    |
| Halogen-free                       |  | Yes                                                                      |
| Silicon-free                       |  | Yes                                                                      |
| Sheath material                    |  | Halogen-free                                                             |
| Rubber cable                       |  | No                                                                       |
| Weight                             |  | 110.6 g                                                                  |
| Copper weight of the pipe          |  | 0.043 kg/m                                                               |

| Environmental requirements               |  |                                                                                                       |
|------------------------------------------|--|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   |  | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         |  | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature |  | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |  |               |
|-----------------------|--|---------------|
| eCl@ss 10.0           |  | 27-44-06-04   |
| eCl@ss 9.0            |  | 27-44-06-04   |
| ETIM 9.0              |  | EC002587      |
| ETIM 8.0              |  | EC002587      |
| PU (SPU)              |  | 1 pcs         |
| Packaging type        |  | unpacked      |
| Country of origin     |  | DE            |
| GTIN                  |  | 4055143786553 |
| Customs tariff number |  | 85444290900   |

| Environmental Product Compliance |  |                         |
|----------------------------------|--|-------------------------|
| RoHS Compliance Status           |  | Compliant, No Exemption |



Downloads

Environmental Product Compliance

|                                                      |
|------------------------------------------------------|
| Compliance Search                                    |
| Environmental Product Compliance<br>771-9273/216-105 |



1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 770-101](#)  
Locking lever; for flying leads; for manual operation; black



[Item No.: 770-121](#)  
Locking lever; for flying leads; for manual operation; white



[Item No.: 770-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 770-131](#)  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-360](#)  
Lockout cap; for plugs; 5-pole; separable; yellow



[Item No.: 897-2003](#)  
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

### 1.2.3.2 Marking strip



**Item No.: 210-334**

Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white