



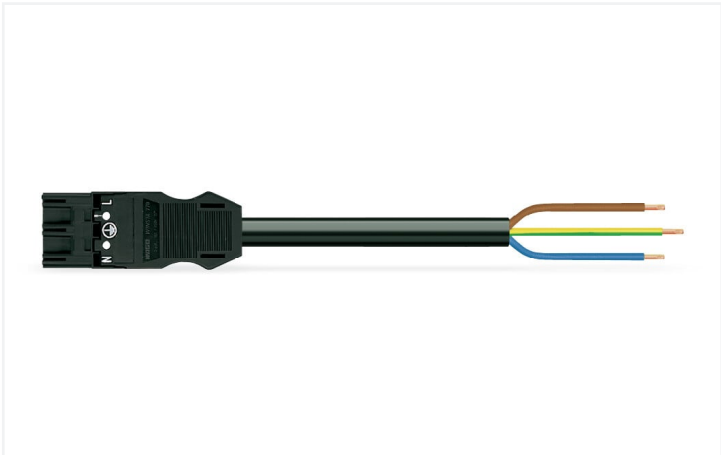

Color: ■ black

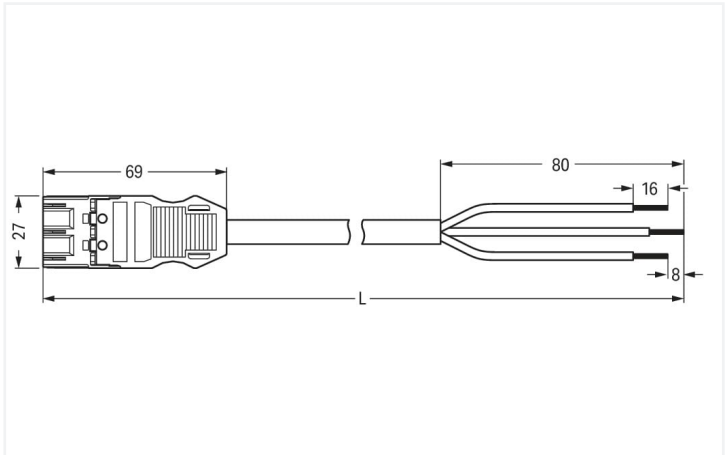

Dimensions in mm

Cable assembly WINSTA® MIDI with protection against mismating

The WINSTA® MIDI cable assembly with protection against mismating supports fast, reliable installation. WAGO pluggable installation connectors are useful when criteria repeat or are distributed on a defined pattern, for example for installing grid lighting or flush-mount lighting. For greater security in electrical installations, the pluggable installation connector is provided with mechanical protection against mismating. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). General mains applications for almost any domain of use can be realised with WINSTA® MIDI pluggable installation connectors with A coding. Important parameters in the selection of a pluggable installation connector are the rated current and voltage: They tell us about the product's domains of use. This product has a current rating of 20 A – so it is suitable for robust loads. Our WINSTA® MIDI product line offers total flexibility for the installation of applications. With its Push-in CAGE CLAMP® spring pressure connection technology, it ensures time-saving, error-free installation and offers flexibility and customization for meeting all installation requirements. This product meets all the mandatory fire protection requirements of fire class E; thus it can be used in domains where fire safety is relevant.

Pluggable connections instead of screw connections – cable assemblies from WAGO

A plug and a free end are provided. The WINSTA® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and therefore faster, more reliable, and error-free. Use of this pre-assembled system reduces assembly times and errors during installation at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with fire class E from WAGO.

- protection against mismating eliminates errors
- for automation controllers
- with A coding for use in many general mains applications
- flexible installation to save space
- convenient installation and commissioning

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 250 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 4 kV           | -   | -  |                                                 |  |
| Rated current        |  | 20 A           | -   | -  |                                                 |  |

|              |                        |
|--------------|------------------------|
| Pin spacing  | 10 mm / 0.394 inches   |
| Width        | 27 mm / 1.063 inches   |
| Height       | 12.9 mm / 0.508 inches |
| Total length | 8 m                    |

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Use                                     | General mains applications                                                                                    |
| Coding                                  | A                                                                                                             |
| Variable coding                         | Yes                                                                                                           |
| Marking                                 | L N                                                                                                           |
| Potential marking                       | L N                                                                                                           |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Plug - free end                                                                                               |
| Type of pre-assembled cable             | Connecting cable                                                                                              |
| Cable type                              | H05VV-F 3G2.5                                                                                                 |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |
| Suitable                                | for switches and outlet installation                                                                          |

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                      |                                         |                                                                          |
|------------------------------------|-----------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               |                                         | <a href="#">Information on material specifications can be found here</a> |
| Color                              | black                                   |                                                                          |
| Insulation material (main housing) | Polyamide (PA66)                        |                                                                          |
| Fire class per EN 50575            | E <sub>ca</sub>                         |                                                                          |
| Contact material                   | Copper or copper alloy; surface-treated |                                                                          |
| Contact Plating                    | Tin                                     |                                                                          |
| Fire load                          | 239.749 MJ                              |                                                                          |
| Connector color                    | black                                   |                                                                          |
| Strain relief color                | black                                   |                                                                          |
| Printing color of strain relief    | white                                   |                                                                          |
| Sheathed cable color               | black                                   |                                                                          |
| Printing color of sheathed cable   | white                                   |                                                                          |
| Halogen-free                       | No                                      |                                                                          |
| Silicon-free                       | Yes                                     |                                                                          |
| Sheath material                    | PVC                                     |                                                                          |
| Rubber cable                       | No                                      |                                                                          |
| Weight                             | 1278.5 g                                |                                                                          |
| Copper weight of the pipe          | 0.072 kg/m                              |                                                                          |

| Environmental requirements               |                                                                                                       |  |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|--|
| Processing temperature                   | -5 ... +40 °C                                                                                         |  |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |  |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |  |

| Commercial data       |               |  |
|-----------------------|---------------|--|
| eCl@ss 10.0           | 27-44-06-04   |  |
| eCl@ss 9.0            | 27-44-06-04   |  |
| ETIM 8.0              | EC002587      |  |
| ETIM 7.0              | EC002587      |  |
| PU (SPU)              | 1 pcs         |  |
| Packaging type        | unpacked      |  |
| Country of origin     | DE            |  |
| GTIN                  | 4045454918224 |  |
| Customs tariff number | 85444290900   |  |

| Environmental Product Compliance |                         |  |
|----------------------------------|-------------------------|--|
| RoHS Compliance Status           | Compliant, No Exemption |  |

| Approvals / Certificates                                |          |                                                            |
|---------------------------------------------------------|----------|------------------------------------------------------------|
| General approvals                                       |          | Declarations of conformity and manufacturer's declarations |
|                                                         |          |                                                            |
| Approval                                                | Standard | Certificate Name                                           |
| CCA<br>DEKRA Certification B.V.                         | EN 61535 | NTR NL-7972                                                |
| KEMA/KEUR<br>DEKRA Certification B.V.                   | EN 61535 | 71-123834                                                  |
| Approval                                                | Standard | Certificate Name                                           |
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance771-9993/3207-801

Download icon

Documentation

Bid Text

|                   |            |                 |               |
|-------------------|------------|-----------------|---------------|
| 771-9993/3207-801 | 19.02.2019 | xml<br>3.06 KB  | Download icon |
| 771-9993/3207-801 | 05.12.2014 | doc<br>25.50 KB | Download icon |

CAD/CAE-Data

CAE data

EPLAN Data Portal771-9993/3207-801

Download icon

WSCAD Universe771-9993/3207-801

Download icon

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system

Item No.: 770-101  
Locking lever; for flying leads; for manual operation; black

Item No.: 770-121  
Locking lever; for flying leads; for manual operation; white

Item No.: 770-111  
Locking lever; for flying leads; for tool operation; black

Item No.: 770-131  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover

Item No.: 770-360  
Lockout cap; for plugs; 5-pole; separable; yellow

Item No.: 897-2003  
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white