




Color: ■ black

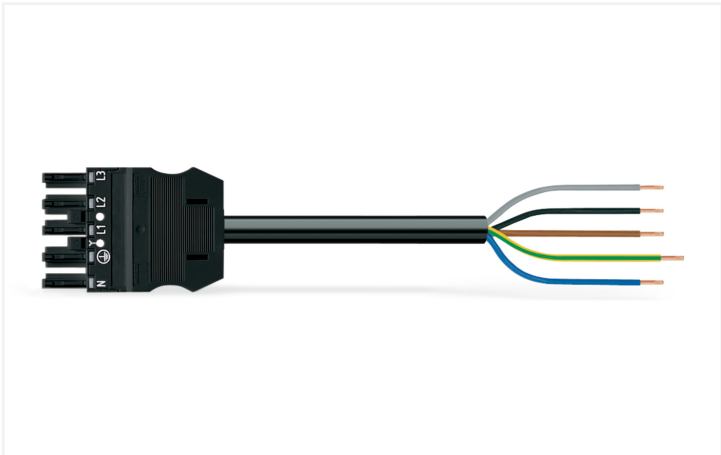

Dimensions in mm

Cable assembly WINSTA® MIDI 5-pole

The WINSTA® MIDI cable assembly with protection against mismatching allows installation of fine-stranded and solid conductors. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to various requirements in seconds. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with energised contact elements. General mains applications for almost any domain of use can be implemented with WINSTA® MIDI pluggable installation connectors with A coding. This pluggable installation connector is used for electrical currents up to 20 A. Thus the product is ideally suitable for high power loads. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a broad range of individual products you can use for quick, easy and maximally flexible electrical installation. If you need to meet stricter safety standards, you should use cables with fire class B2. These are suitable for use in buildings with very high demands on safety. The cable assembly is halogen-free. This eliminates the addition of environmental pollutants during production. It also increases the fire class, since halogen-free materials do not easily ignite.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a free end. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection type IP20 from WAGO.

- effective protection against mismatching
- for automation controllers
- suitable for any application
- custom-engineered solutions
- quick replacement of defective units during ongoing operation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 400 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 6 kV           | -   | -  |                                                 |  |
| Rated current        |  | 20 A           | -   | -  |                                                 |  |



| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 5                         | Connection 1                    |                    |
| PE function                | Preceding PE contact      | Strip length                    | 9 mm / 0.35 inches |
| Conductor preparation      | ultrasonically tip-bonded | Pole number                     | 5                  |
|                            |                           | Wire cross-section              | 2.5 mm²            |
|                            |                           | Strip length (outer insulation) | 55 mm              |
|                            |                           | Connection type                 | Socket - free end  |

| Physical data |  |                         |
|---------------|--|-------------------------|
| Pin spacing   |  | 10 mm / 0.394 inches    |
| Width         |  | 47 mm / 1.85 inches     |
| Height        |  | 15.38 mm / 0.606 inches |
| Total length  |  | 5 m                     |

| Mechanical data                         |  |                                                                                                               |
|-----------------------------------------|--|---------------------------------------------------------------------------------------------------------------|
| Use                                     |  | General mains applications                                                                                    |
| Coding                                  |  | A                                                                                                             |
| Variable coding                         |  | Yes                                                                                                           |
| Marking                                 |  | N ⊕ L1 L2 L3                                                                                                  |
| Potential marking                       |  | N ⊕ L1 L2 L3                                                                                                  |
| Mating force of a plug-in connection    |  | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection |  | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  |  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 |  | 200, without resistive load                                                                                   |
| Connection type                         |  | Socket - free end                                                                                             |
| Type of pre-assembled cable             |  | Connecting cable                                                                                              |
| Cable type                              |  | H05Z1Z1-F 5G2.5                                                                                               |
| Protection type                         |  | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

| Plug-in connection            |  |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          |  | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  |  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 |  | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection |  | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        |  | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                      |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | black                                                                    |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Flammability class per UL94        | V0                                                                       |
| Fire class per EN 50575            | B2 <sub>ca</sub>                                                         |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 0.511 MJ                                                                 |
| Connector color                    | black                                                                    |
| Strain relief color                | black                                                                    |
| Printing color of strain relief    | white                                                                    |
| Sheathed cable color               | black                                                                    |
| Printing color of sheathed cable   | white                                                                    |
| Halogen-free                       | Yes                                                                      |
| Silicon-free                       | Yes                                                                      |
| Sheath material                    | Halogen-free                                                             |
| Rubber cable                       | No                                                                       |
| Weight                             | 1245.8 g                                                                 |
| Copper weight of the pipe          | 0.12 kg/m                                                                |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4055143660570 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |



Downloads

Environmental Product Compliance

|                                  |  |  |   |
|----------------------------------|--|--|---|
| Compliance Search                |  |  |   |
| Environmental Product Compliance |  |  | ↓ |
| 771-9295/117-501                 |  |  |   |

Documentation

|                  |            |                 |   |
|------------------|------------|-----------------|---|
| Bid Text         |            |                 |   |
| 771-9295/117-501 | 19.02.2019 | xml<br>2.95 KB  | ↓ |
| 771-9295/117-501 | 01.12.2017 | doc<br>26.00 KB | ↓ |

CAD/CAE-Data

|                   |   |
|-------------------|---|
| CAE data          |   |
| EPLAN Data Portal | ↓ |
| 771-9295/117-501  |   |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 770-101](#)  
Locking lever; for flying leads; for manual operation; black



[Item No.: 770-121](#)  
Locking lever; for flying leads; for manual operation; white



[Item No.: 770-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 770-131](#)  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-201](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



[Item No.: 770-221](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



[Item No.: 897-2005](#)  
Protective cap; Type4; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white