



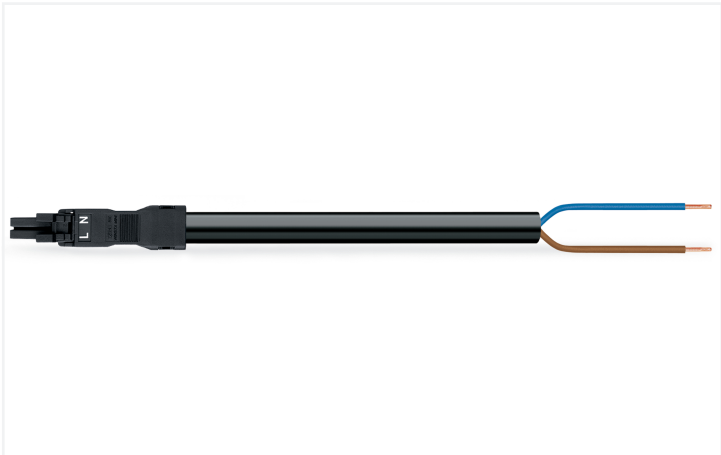

Color: ■ black

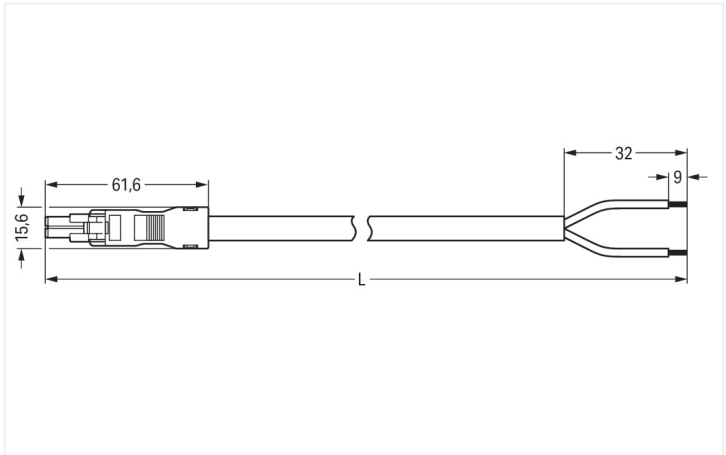

Dimensions in mm

Cable assembly WINSTA® MINI with protection type IP40

The WINSTA® MINI cable assembly 2-pole supports fast, reliable installation. The pluggable installation connectors with spring pressure connection technology work without screw connections. They allow flexible, error-free installation in numerous applications. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The pluggable installation connector offers protection against contact with tools or wires if they are smaller than 1 mm in accordance with protection type IP40. Thanks to the color coding and mechanical A coding of WINSTA® MINI pluggable installation connectors, you can clearly distinguish different circuits. If only limited space is available, our smallest pluggable connection system, WINSTA® MINI, conveniently displays its advantageous properties. It saves space, and, with Push-in CAGE CLAMP® spring pressure connection technology, it additionally can be installed quickly, since the installation is low-maintenance and requires no screw connections. According to the European CPR, the fire class of the cables used in construction is essential for the safety of buildings, too. For houses with medium-level safety requirements, cable assemblies with fire class E are suitable.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable assembly is equipped with a socket and a free end. The WINSTA® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently more efficient, even more reliable, and error-free. Use of this pre-assembled system reduces time spent on assembly and errors during installation at the construction site. Choose durability and quality – with strain relief hosting from WAGO makes the installation of electrical components significantly easier.

- pluggable installation connectors with protection against mismatching
- compact design for conductors with a cross-section up to 1.5 mm²
- with A coding for use in a large number of general mains applications
- ready for immediate use
- convenient installation and commissioning

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category	III	III	II		approx. 1 mΩ of contact resistance	
Pollution degree	3	2	2		approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage	250 V	-	-			
Rated surge voltage	4 kV	-	-			
Rated current	16 A	-	-			



Connection data			
Total number of potentials	2	Connection 1	
Conductor preparation	ultrasonically tip-bonded	Strip length	9 mm / 0.35 inches
		Pole number	2
		Wire cross-section	1.5 mm²
		Strip length (outer insulation)	32 mm
		Connection type	Socket - free end

Physical data			
Pin spacing		4.4 mm / 0.173 inches	
Width		15.6 mm / 0.614 inches	
Height		13.2 mm / 0.52 inches	
Total length		6 m	

Mechanical data			
Use		General mains applications	
Coding		A	
Variable coding		No	
Marking		L N	
Potential marking		L N	
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)	
Retention force of a plug-in connection		when locked: > 80N	
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)	
Number of mating cycles		200, without resistive load	
Connection type		Socket - free end	
Type of pre-assembled cable		Connecting cable	
Cable type		H05VV-F 2x1.5	
Protection type		IP40	

Plug-in connection			
Mismating protection		Yes	
Note on mismating protection		All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole	
Locking lever		Can be retrofitted	
Locking of plug-in connection		Locking lever	
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).	

Material data			
Note (material data)		Information on material specifications can be found here	
Color		black	
Insulation material (main housing)		Polyamide (PA66)	
Flammability class per UL94		V0	
Fire class per EN 50575		E _{ca}	
Contact material		Copper or copper alloy; surface-treated	
Contact Plating		Tin	
Fire load		179.686 MJ	
Connector color		black	



Material data		
Strain relief color		black
Sheathed cable color		black
Printing color of sheathed cable		white
Halogen-free		No
Silicon-free		Yes
Sheath material		PVC
Rubber cable		No
Weight		497.5 g
Copper weight of the pipe		0.029 kg/m

Environmental requirements		
Processing temperature		-5 ... +40 °C
Continuous operating temperature		-35 ... +85 °C
Note on continuous operating temperature		Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data		
eCl@ss 10.0		27-44-06-04
eCl@ss 9.0		27-44-06-04
ETIM 9.0		EC002587
ETIM 8.0		EC002587
PU (SPU)		1 pcs
Packaging type		unpacked
Country of origin		PL
GTIN		4055143350723
Customs tariff number		85444290900

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance			↓
891-8992/106-601			

Documentation

Bid Text			
891-8992/106-601	19.02.2019	xml 2.99 KB	↓
891-8992/106-601	24.11.2014	doc 24.00 KB	↓



CAD/CAE-Data	
CAE data	
EPLAN Data Portal 891-8992/106-601	
WSCAD Universe 891-8992/106-601	

1 Compatible Products			
1.1 Required Accessories			
1.1.1 Locking system			
1.1.1.1 Locking system			
Item No.: 890-111 Locking lever; for flying leads; for tool operation; black	Item No.: 890-131 Locking lever; for flying leads; for tool operation; white	Item No.: 890-101 Locking lever; for manual operation; black	Item No.: 890-121 Locking lever; for manual operation; white

1.2 Optional Accessories	
1.2.1 Cover	
1.2.1.1 Cover	
	Item No.: 897-2001 Protective cap; Type1; for sockets and plugs; PVC; red
1.2.2 Installation	
1.2.2.1 Mounting accessories	
Item No.: 890-310 Mounting carrier; 2- to 5-pole; for flying leads; black	Item No.: 890-311 Mounting carrier; 2- to 5-pole; for flying leads; white