




Color: ■ blue

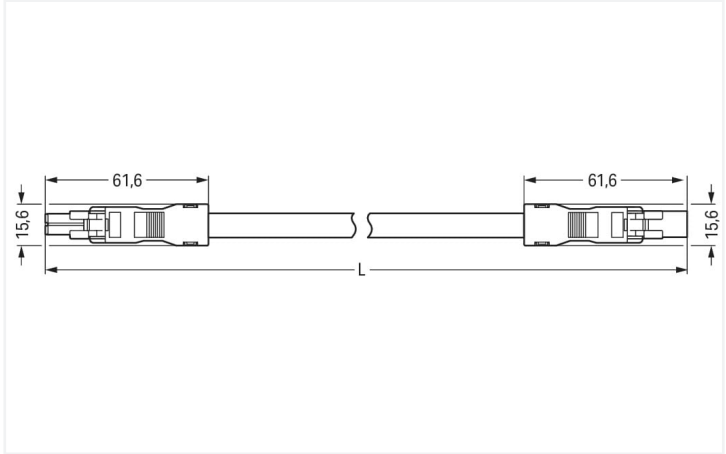

Dimensions in mm

Cable assembly WINSTA® MINI I coding

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MINI cable assembly with protection type IP20. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to establish connections according to many different requirements in no time flat. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. WINSTA® MINI pluggable installation connectors with I coding in blue are especially suitable for lighting management, for instance for the dimming function of DALI lights. Due to its particularly compact dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very restricted spaces, i.e., for installations when very little room is available. Of course, the safety of buildings must always be ensured, even after the electrical installation has been performed. The required safety requirements in connection with EU CPR are fully satisfied by this product through fire class E. Eliminating halogens as an additive in the manufacture of this cable assembly significantly improves fire safety and minimises environmental pollution.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable assembly is equipped with a socket and a plug. WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Now you can also lower installation expenses without compromising safety and quality: with marking eliminates the need for servicing and prevents unnecessary downtime.

- effective protection against mismatching
- compact design for conductors with a cross-section up to 1.5 mm²
- with I coding for use in the automation of buildings (lighting control)
- exact dimensions
- convenient installation and commissioning

Notes		
Note	Cables with a different fire class can be found in the eShop.	

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category	III	III	II		approx. 1 mΩ of contact resistance	
Pollution degree	3	2	2		approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage	250 V	-	-			
Rated surge voltage	4 kV	-	-			
Rated current	16 A	-	-			



Connection data			
Total number of potentials		2	
		Connection 1	
		Pole number	2
		Wire cross-section	1.5 mm²
		Connection type	Socket - Plug
Physical data			
Pin spacing		4.4 mm / 0.173 inches	
Width		15.6 mm / 0.614 inches	
Height		13.2 mm / 0.52 inches	
Total length		8 m	
Mechanical data			
Use		DALI, Lighting Management	
Coding		I	
Variable coding		No	
Marking		+ -	
Potential marking		+ -	
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)	
Retention force of a plug-in connection		when locked: > 80N	
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)	
Number of mating cycles		200, without resistive load	
Connection type		Socket - Plug	
Type of pre-assembled cable		Interconnecting cable	
Cable type		H05Z1Z1-F 2x1.5	
Protection type		IP20; IP40 when mated	
Plug-in connection			
Mismating protection		Yes	
Note on mismating protection		All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole	
Locking lever		Can be retrofitted	
Locking of plug-in connection		Locking lever	
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).	
Material data			
Note (material data)		Information on material specifications can be found here	
Color		blue	
Insulation material (main housing)		Polyamide (PA66)	
Fire class per EN 50575		E _{ca}	
Contact material		Copper or copper alloy; surface-treated	
Contact Plating		Tin	
Fire load		239.364 MJ	
Connector color		blue	
Strain relief color		black	
Sheathed cable color		black	
Printing color of sheathed cable		white	



Material data	
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	635.3 g
Copper weight of the pipe	0.029 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 8.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143391634
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 891-8982/016-801	

Documentation

Bid Text			
891-8982/016-801	19.02.2019	xml 3.00 KB	
891-8982/016-801	24.11.2014	doc 24.50 KB	

CAD/CAE-Data
CAE data
WSCAD Universe 891-8982/016-801



1 Compatible Products
1.1 Required Accessories
1.1.1 Locking system
1.1.1.1 Locking system



Item No.: 890-111 Locking lever; for flying leads; for tool operation; black	Item No.: 890-131 Locking lever; for flying leads; for tool operation; white	Item No.: 890-101 Locking lever; for manual operation; black	Item No.: 890-121 Locking lever; for manual operation; white
---	---	---	---

1.2 Optional Accessories
1.2.1 Cover
1.2.1.1 Cover



Item No.: 897-2001 Protective cap; Type1; for sockets and plugs; PVC; red
--

1.2.2 Installation
1.2.2.1 Mounting accessories



Item No.: 890-310 Mounting carrier; 2- to 5-pole; for flying leads; black	Item No.: 890-311 Mounting carrier; 2- to 5-pole; for flying leads; white
--	--