




Color:   white

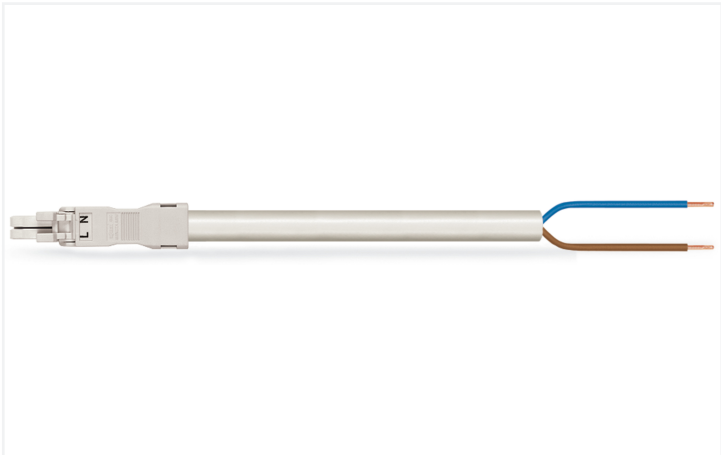

Dimensions in mm

Cable assembly WINSTA® MINI A coding

For signal and power transmission: The WINSTA® MINI cable assembly with protection against mismating. Our pluggable installation connectors with spring pressure connection technology function completely without screw connections. They allow resource-efficient, error-free installation in numerous applications. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector offers protection against contact with tools or wires if they are smaller than 1 mm in accordance with protection type IP40. Thanks to the color coding and mechanical A coding of WINSTA® MINI pluggable installation connectors, you can clearly distinguish different circuits. WINSTA® MINI satisfies the demand for miniaturisation. Our smallest pluggable connection system is especially suitable for lights, for instance, since as a result of LED technology; due to complex systems, these offer significantly less space for the connection technology. This product meets all the mandatory fire protection requirements of fire class E; as a result it can be used in areas where fire safety is relevant.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a free end. The WINSTA® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently more efficient, even more reliable, and error-free. Using this pre-assembled system reduces time spent on assembly and installation errors at the construction site. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection type IP40 from WAGO.

- protection against mismating eliminates errors
- consistent IP40 protection
- suitable for any application
- ready for immediate use
- rapid, structured electrical installation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |       |                |    |  | General information                             |  |
|----------------------|-------|----------------|----|--|-------------------------------------------------|--|
| Ratings per          |       | IEC/EN 60664-1 |    |  | Note on contact resistance                      |  |
| Overvoltage category | III   | III            | II |  | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     | 3     | 2              | 2  |  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      | 250 V | -              | -  |  |                                                 |  |
| Rated surge voltage  | 4 kV  | -              | -  |  |                                                 |  |
| Rated current        | 16 A  | -              | -  |  |                                                 |  |

## Connection data

|                            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 2                         | <b>Connection 1</b>             |                    |
| Conductor preparation      | ultrasonically tip-bonded | Strip length                    | 9 mm / 0.35 inches |
|                            |                           | Pole number                     | 2                  |
|                            |                           | Wire cross-section              | 1.5 mm²            |
|                            |                           | Strip length (outer insulation) | 32 mm              |
|                            |                           | Connection type                 | Socket - free end  |

## Physical data

|              |                        |
|--------------|------------------------|
| Pin spacing  | 4.4 mm / 0.173 inches  |
| Width        | 15.6 mm / 0.614 inches |
| Height       | 13.2 mm / 0.52 inches  |
| Total length | 1 m                    |

## Mechanical data

|                                         |                                                               |
|-----------------------------------------|---------------------------------------------------------------|
| Use                                     | General mains applications                                    |
| Coding                                  | A                                                             |
| Variable coding                         | No                                                            |
| Marking                                 | L N                                                           |
| Potential marking                       | L N                                                           |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                |
| Retention force of a plug-in connection | when locked: > 80N                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number) |
| Number of mating cycles                 | 200, without resistive load                                   |
| Connection type                         | Socket - free end                                             |
| Type of pre-assembled cable             | Connecting cable                                              |
| Cable type                              | H05VV-F 2x1.5                                                 |
| Protection type                         | IP40                                                          |

## Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                        |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

## Material data

|                                    |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | white                                                                    |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Fire class per EN 50575            | E <sub>ca</sub>                                                          |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 29.642 MJ                                                                |
| Connector color                    | white                                                                    |
| Strain relief color                | white                                                                    |



| Material data                    |            |
|----------------------------------|------------|
| Sheathed cable color             | white      |
| Printing color of sheathed cable | black      |
| Halogen-free                     | No         |
| Silicon-free                     | Yes        |
| Sheath material                  | PVC        |
| Rubber cable                     | No         |
| Weight                           | 86.4 g     |
| Copper weight of the pipe        | 0.029 kg/m |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | PL            |
| GTIN                  | 4055143362795 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance  
891-8992/106-102

↓

| Documentation    |            |                 |   |
|------------------|------------|-----------------|---|
| Bid Text         |            |                 |   |
| 891-8992/106-102 | 19.02.2019 | xml<br>2.99 KB  | ↓ |
| 891-8992/106-102 | 21.11.2014 | doc<br>24.50 KB | ↓ |



| CAD/CAE-Data                          |  |
|---------------------------------------|--|
| CAE data                              |  |
| EPLAN Data Portal<br>891-8992/106-102 |  |
| WSCAD Universe<br>891-8992/106-102    |  |

| 1 Compatible Products    |
|--------------------------|
| 1.1 Required Accessories |
| 1.1.1 Locking system     |
| 1.1.1.1 Locking system   |



|                                                                                                 |                                                                                                 |                                                                                 |                                                                                 |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| <a href="#">Item No.: 890-111</a><br>Locking lever; for flying leads; for tool operation; black | <a href="#">Item No.: 890-131</a><br>Locking lever; for flying leads; for tool operation; white | <a href="#">Item No.: 890-101</a><br>Locking lever; for manual operation; black | <a href="#">Item No.: 890-121</a><br>Locking lever; for manual operation; white |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|

| 1.2 Optional Accessories |
|--------------------------|
| 1.2.1 Cover              |
| 1.2.1.1 Cover            |



|                                                                                              |
|----------------------------------------------------------------------------------------------|
| <a href="#">Item No.: 897-2001</a><br>Protective cap; Type1; for sockets and plugs; PVC; red |
|----------------------------------------------------------------------------------------------|

| 1.2.2 Installation           |
|------------------------------|
| 1.2.2.1 Mounting accessories |



|                                                                                              |                                                                                              |
|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| <a href="#">Item No.: 890-310</a><br>Mounting carrier; 2- to 5-pole; for flying leads; black | <a href="#">Item No.: 890-311</a><br>Mounting carrier; 2- to 5-pole; for flying leads; white |
|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|