




Color: ■ black

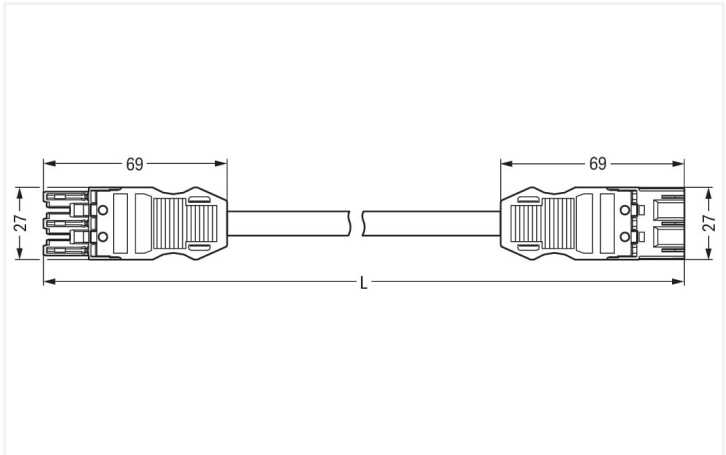

Dimensions in mm

Cable assembly *WINSTA*® MIDI rated current 16 A

For power and signal transmission: The *WINSTA*® MIDI cable assembly 3-pole. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to many different requirements in no time flat. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). Thanks to the color coding and mechanical A coding of *WINSTA*® MIDI pluggable installation connectors, you can clearly distinguish different circuits. The *WINSTA*® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Thanks to the integrated test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs. Anyone who needs to take into account technical safety requirements for fire protection reasons for electrical installation should be able to rely on the quality of the components. Our product meets the strict safety standards of fire class B2. The cable assembly is halogen-free. This eliminates the addition of environmental pollutants during production. It also achieves a higher fire class, since halogen-free materials do not easily ignite.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a plug. The *WINSTA*® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with marking from WAGO.

- effective protection against mismatching
- for automation controllers
- with A coding for use in many general mains applications
- flexible installation to save space
- convenient installation and commissioning

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category		III	III	II	approx. 1 mΩ of contact resistance	
Pollution degree		3	2	2	approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage		250 V	-	-		
Rated surge voltage		4 kV	-	-		
Rated current		16 A	-	-		



Connection data			
Total number of potentials	3	Connection 1	
PE function	Preceding PE contact		
		Pole number	3
		Wire cross-section	1.5 mm²
		Connection type	Socket - Plug
Physical data			
Pin spacing	10 mm / 0.394 inches		
Width	27 mm / 1.063 inches		
Height	12.9 mm / 0.508 inches		
Total length	5 m		
Mechanical data			
Use	General mains applications		
Coding	A		
Variable coding	Yes		
Marking	L ⊕ N		
Potential marking	L ⊕ N		
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)		
Retention force of a plug-in connection	when locked: > 80N		
Unmating force of a plug-in connection	when unlocked: approx. 20 ... 70 N (depending on pole number)		
Number of mating cycles	200, without resistive load		
Connection type	Socket - Plug		
Type of pre-assembled cable	Interconnecting cable		
Cable type	H05Z1Z1-F 3G1.5		
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)		
Plug-in connection			
Mismating protection	Yes		
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole		
Locking lever	Can be retrofitted		
Locking of plug-in connection	Locking lever		
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).		
Material data			
Note (material data)	Information on material specifications can be found here		
Color	black		
Insulation material (main housing)	Polyamide (PA66)		
Flammability class per UL94	V0		
Fire class per EN 50575	B2 _{ca}		
Contact material	Copper or copper alloy; surface-treated		
Contact Plating	Tin		
Fire load	0.617 MJ		
Connector color	black		
Strain relief color	black		
Printing color of strain relief	white		



Material data	
Sheathed cable color	black
Printing color of sheathed cable	white
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	531.6 g
Copper weight of the pipe	0.043 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 8.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	DE
GTIN	4055143668675
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 771-9293/016-501	

Documentation

Bid Text			
771-9293/016-501	19.02.2019	xml 2.95 KB	
771-9293/016-501	01.12.2017	doc 25.00 KB	



CAD/CAE-Data	
CAE data	
EPLAN Data Portal 771-9293/016-501	

1 Compatible Products
1.1 Required Accessories
1.1.1 Locking system
1.1.1.1 Locking system



Item No.: 770-101 Locking lever; for flying leads; for manual operation; black	Item No.: 770-121 Locking lever; for flying leads; for manual operation; white	Item No.: 770-111 Locking lever; for flying leads; for tool operation; black	Item No.: 770-131 Locking lever; for flying leads; for tool operation; white
---	---	---	---

1.2 Optional Accessories
1.2.1 Cover
1.2.1.1 Cover



Item No.: 770-201 Lockout cap; 12-pole, separable; for sockets; Plastic; black	Item No.: 770-221 Lockout cap; 12-pole, separable; for sockets; Plastic; white	Item No.: 770-360 Lockout cap; for plugs; 5-pole; separable; yellow	Item No.: 897-2003 Protective cap; Type2; for sockets and plugs; PVC; red
---	---	--	--

1.2.2 Installation
1.2.2.1 Mounting accessories



Item No.: 770-310 Mounting carrier; 2- to 5-pole; for flying leads; black
--

1.2.3 Marking
1.2.3.1 Marker



Item No.: 770-450/000-006 Marker card; Plastic; blue	Item No.: 770-450/000-001 Marker card; Plastic; green	Item No.: 770-450/000-012 Marker card; Plastic; orange	Item No.: 770-450/000-005 Marker card; Plastic; red
---	--	---	--



Item No.: 770-450 Marker card; Plastic; white	Item No.: 770-450/000-002 Marker card; Plastic; yellow
--	---

1.2.3.2 Marking strip



Item No.: 210-334

Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white