



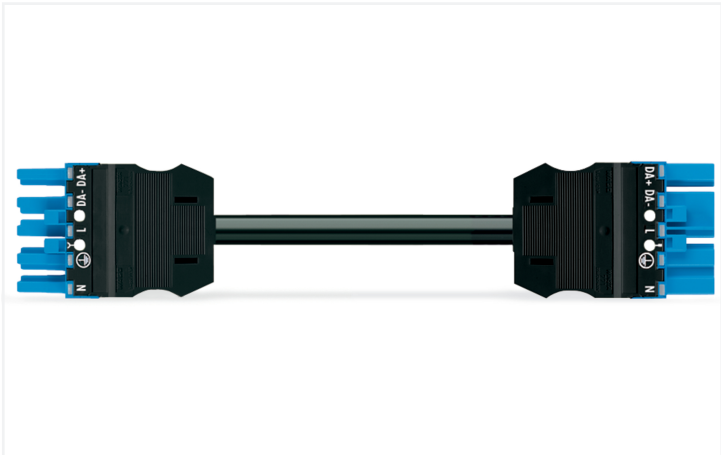

Color: ■ blue

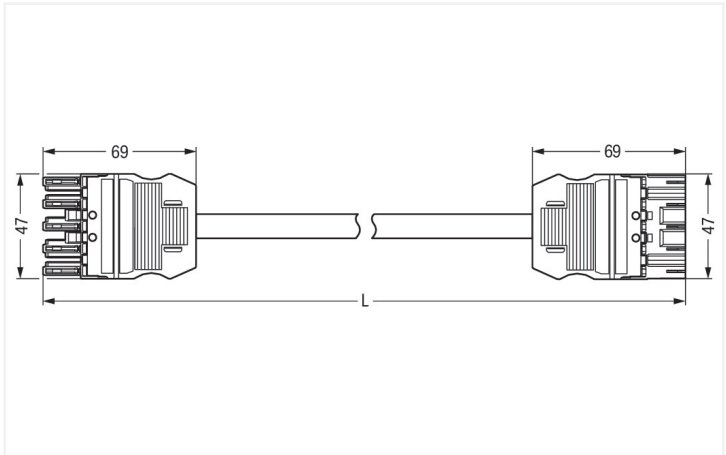

Dimensions in mm

Cable assembly WINSTA® MIDI with protection against mismating

For power and signal transmission: The WINSTA® MIDI cable assembly with protection against mismating. WAGO pluggable installation connectors can be used when specifications repeat or are distributed on a specified pattern, for example for installing grid lighting or flush-mount lighting. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector offers protection against contact with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). WINSTA® MIDI pluggable installation connectors with I coding in blue are especially suitable for easy lighting installation, for instance for the dimming of DALI lights. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Due to the included test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs. According to the European CPR, the fire class of the cables used for construction is critical for building safety, too. For houses with average safety requirements, cable assemblies with fire class E are suitable.

Fast, error-free assembly thanks to cable assemblies from WAGO

A socket and a plug are provided. WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismating from WAGO.

- protection against mismating eliminates errors
- simple circuits
- for lighting management
- flexible installation to save space
- fast, secure installation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |       |                |    | General information                             |  |
|----------------------|-------|----------------|----|-------------------------------------------------|--|
| Ratings per          |       | IEC/EN 60664-1 |    | Note on contact resistance                      |  |
| Overvoltage category | III   | III            | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     | 3     | 2              | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      | 400 V | -              | -  |                                                 |  |
| Rated surge voltage  | 6 kV  | -              | -  |                                                 |  |
| Rated current        | 16 A  | -              | -  |                                                 |  |

## Connection data

|                            |                      |                     |                     |
|----------------------------|----------------------|---------------------|---------------------|
| Total number of potentials | 5                    | <b>Connection 1</b> |                     |
| PE function                | Preceding PE contact | Pole number         | 5                   |
|                            |                      | Wire cross-section  | 1.5 mm <sup>2</sup> |
|                            |                      | Connection type     | Socket - Plug       |

## Physical data

|              |                         |
|--------------|-------------------------|
| Pin spacing  | 10 mm / 0.394 inches    |
| Width        | 47 mm / 1.85 inches     |
| Height       | 15.38 mm / 0.606 inches |
| Total length | 5 m                     |

## Mechanical data

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Use                                     | DALI, Lighting Management                                                                                     |
| Coding                                  | I                                                                                                             |
| Variable coding                         | No                                                                                                            |
| Marking                                 | N ⊕ L DA- DA+                                                                                                 |
| Potential marking                       | N ⊕ L DA- DA+                                                                                                 |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Socket - Plug                                                                                                 |
| Type of pre-assembled cable             | Interconnecting cable                                                                                         |
| Cable type                              | H05VV-F 5G1.5                                                                                                 |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

## Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                        |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

## Material data

|                                    |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | blue                                                                     |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Flammability class per UL94        | V0                                                                       |
| Fire class per EN 50575            | E <sub>ca</sub>                                                          |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 150.415 MJ                                                               |
| Connector color                    | blue                                                                     |
| Strain relief color                | black                                                                    |
| Printing color of strain relief    | white                                                                    |



| Material data                    |            |
|----------------------------------|------------|
| Sheathed cable color             | black      |
| Printing color of sheathed cable | white      |
| Halogen-free                     | No         |
| Silicon-free                     | Yes        |
| Sheath material                  | PVC        |
| Rubber cable                     | No         |
| Weight                           | 825 g      |
| Copper weight of the pipe        | 0.072 kg/m |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4045454001353 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

| Approvals / Certificates |                                                            |
|--------------------------|------------------------------------------------------------|
| General approvals        | Declarations of conformity and manufacturer's declarations |



| Approval                              | Standard | Certificate Name |
|---------------------------------------|----------|------------------|
| CCA<br>DEKRA Certification B.V.       | EN 61535 | NTR NL-7355      |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 61535 | 71-123834        |

| Approval                                                | Standard | Certificate Name |
|---------------------------------------------------------|----------|------------------|
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                |



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance  
771-9985/006-501

↓

Documentation

Bid Text

|                                     |            |                 |   |
|-------------------------------------|------------|-----------------|---|
| 771-9985/006-501                    | 19.02.2019 | xml<br>2.96 KB  | ↓ |
| 771-9985/006-501                    | 10.12.2014 | doc<br>26.00 KB | ↓ |
| ausschreiben.de<br>771-9985/006-501 |            |                 | ↓ |

CAD/CAE-Data

CAD data

2D/3D Models  
771-9985/006-501

↓

CAE data

WSCAD Universe  
771-9985/006-501

↓

ZUKEN Portal  
771-9985/006-501

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system









[Item No.: 770-101](#)  
Locking lever; for flying leads; for manual operation; black

[Item No.: 770-121](#)  
Locking lever; for flying leads; for manual operation; white

[Item No.: 770-111](#)  
Locking lever; for flying leads; for tool operation; black

[Item No.: 770-131](#)  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover









[Item No.: 770-201](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; black

[Item No.: 770-221](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; white

[Item No.: 770-360](#)  
Lockout cap; for plugs; 5-pole; separable; yellow

[Item No.: 897-2005](#)  
Protective cap; Type4; for sockets and plugs; PVC; red



1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white