





Color: ■ light gray

Similar to illustration

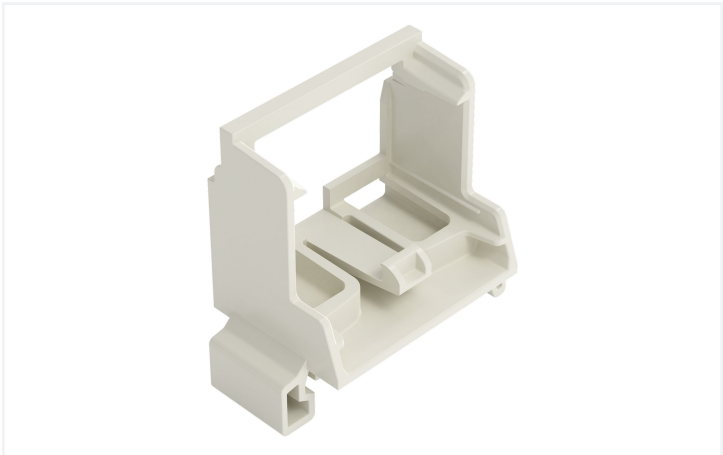

Similar to illustration

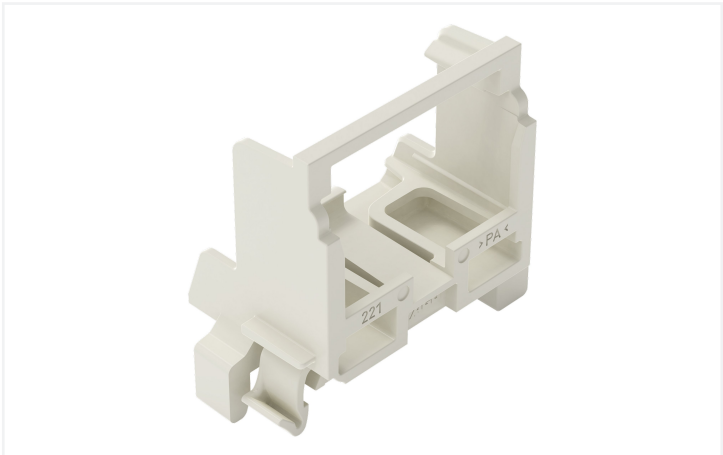

Similar to illustration



Similar to illustration





Physical data	
Width	43 mm / 1.693 inches
Height	39.5 mm / 1.555 inches
Depth	23.7 mm / 0.933 inches

Mechanical data	
Mounting type	Snapping on DIN-35 rail
Suitable	for 10-wire connectors (4 mm²)

Material data	
Note (material data)	Information on material specifications can be found here
Color	light gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.173 MJ
Weight	5.8 g

Commercial data	
PU (SPU)	10 pcs
Packaging type	Box
Country of origin	CN
GTIN	4066966604009
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking


1.1.1.1 Marking strip



Item No.: 210-833
Marking strips; 25 m on roll; 6 mm wide;
plain; Self-adhesive; white



Installation Notes



Inserting a connector into the mounting carrier.

Removing a connector from the mounting carrier.

Conductor termination



Inserting a conductor.



Horizontal screw mounting



Vertical screw mounting



Horizontal mounting via snap-in foot



Vertical mounting via snap-in foot

Strain relief




Use a cable tie to secure the conductors to the strain relief plate.



The strain relief plate can be removed.

Testing



Testing a connector mounted on the carrier via test slot.

Application



Connecting a light to the mains.

Marking



Labeling the mounting carrier.