



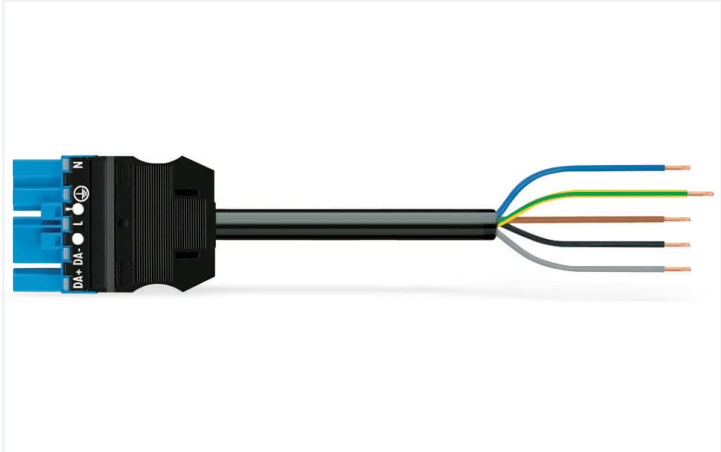

Color: ■ blue

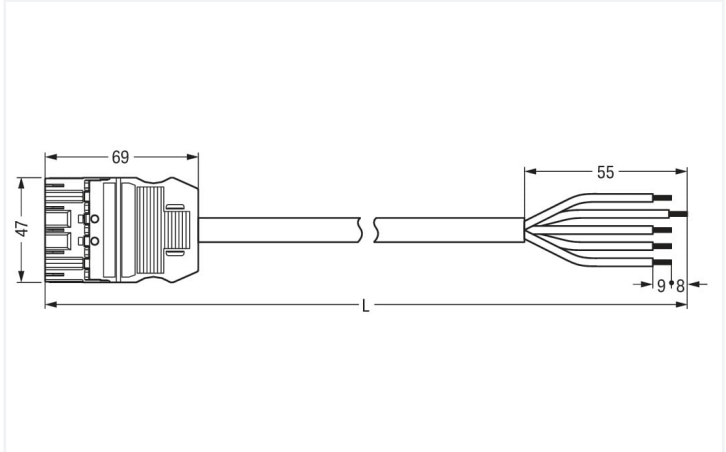

Dimensions in mm

Cable assembly WINSTA® MIDI 5-pole

The WINSTA® MIDI cable assembly with protection against mismatching allows assembly of solid and fine-stranded conductors. WAGO pluggable installation connectors are useful when specifications repeat or are planned on a specific grid, for example for installing grid lighting or flush-mount lighting. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). I coding in blue is used to identify WINSTA® MIDI pluggable installation connectors, which are used above all in automation of buildings for controlling lighting. This pluggable installation connector can be used for electrical currents up to 20 A. Thus the product is especially suitable for high power loads. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in can be found in a variety of projects you can use for quick, easy, flexible, and secure installation. According to the European CPR, the fire class of the cables used in construction is decisive for building safety as well. For buildings with average safety requirements, cable assemblies with fire class E are suitable. Not using halogen additives in the production of this cable assembly significantly increases fire safety and minimises environmental pollution.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable assembly is provided with a plug and a free end. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- protection against mismatching eliminates errors
- pre-assembled versions
- with I coding for lighting control (DALI standard)
- custom-engineered solutions
- quick replacement of defective units during ongoing operation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category		III	III	II	approx. 1 mΩ of contact resistance	
Pollution degree		3	2	2	approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage		400 V	-	-		
Rated surge voltage		6 kV	-	-		
Rated current		20 A	-	-		



Connection data			
Total number of potentials	5	Connection 1	
PE function	Preceding PE contact		
Conductor preparation	ultrasonically tip-bonded		
		Strip length	9 mm / 0.35 inches
		Pole number	5
		Sheathed cable diameter	11.2 ... 13.9 mm
		Wire cross-section	2.5 mm²
		Strip length (outer insulation)	55 mm
		Connection type	Plug - free end

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		47 mm / 1.85 inches
Height		15.38 mm / 0.606 inches
Total length		4 m

Mechanical data		
Use		DALI, Lighting Management
Coding		I
Variable coding		No
Marking		N L DA- DA+
Potential marking		N L DA- DA+
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection		when locked: > 80N
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles		200, without resistive load
Connection type		Plug - free end
Type of pre-assembled cable		Connecting cable
Cable type		H05Z1Z1-F 5G2.5
Protection type		IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection		
Mismating protection		Yes
Note on mismating protection		All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever		Can be retrofitted
Locking of plug-in connection		Locking lever
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).



Material data	
Note (material data)	Information on material specifications can be found here
Color	blue
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire class per EN 50575	E _{ca}
Contact material	Copper or copper alloy; surface-treated
Contact Plating	Tin
Fire load	120.224 MJ
Connector color	blue
Strain relief color	black
Printing color of strain relief	white
Sheathed cable color	black
Printing color of sheathed cable	white
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	948.8 g
Copper weight of the pipe	0.12 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 8.0	EC002587
ETIM 7.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	DE
GTIN	4045454404987
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7972	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123834			



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance			↓
771-9985/217-401			

Documentation

Bid Text			
771-9985/217-401	19.02.2019	xml 3.06 KB	↓
771-9985/217-401	11.12.2014	doc 26.50 KB	↓

CAD/CAE-Data

CAE data			
WSCAD Universe			↓
771-9985/217-401			

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



Item No.: 770-101
Locking lever; for flying leads; for manual operation; black

Item No.: 770-121
Locking lever; for flying leads; for manual operation; white

Item No.: 770-111
Locking lever; for flying leads; for tool operation; black

Item No.: 770-131
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



Item No.: 770-360
Lockout cap; for plugs; 5-pole; separable; yellow

Item No.: 897-2005
Protective cap; Type4; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)
Marker card; Plastic; red



[Item No.: 770-450](#)
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white