



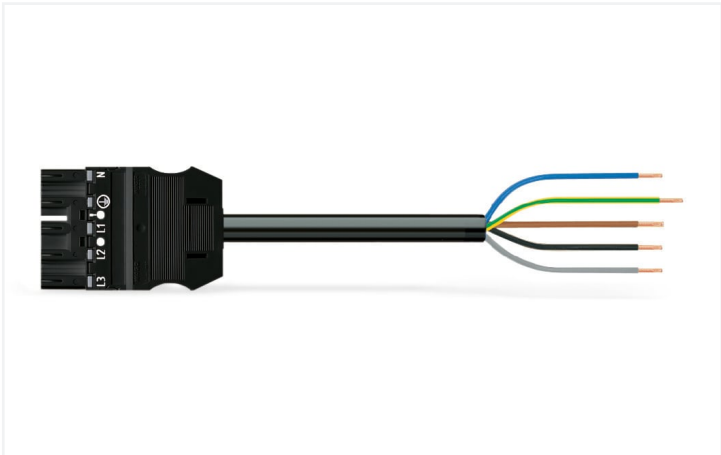

Color: ■ black

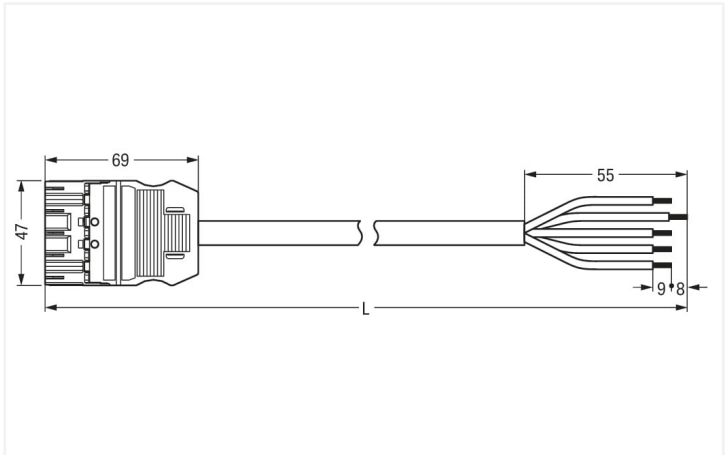

Dimensions in mm

Cable assembly WINSTA® MIDI with protection against mismating

The WINSTA® MIDI cable assembly 5-pole is the pluggable solution for your application in control cabinets, for lighting connections or on PCBs. Our pluggable installation connectors with spring pressure connection technology function without screw connections. They allow resource-efficient, error-free installation in a large number of applications. For greater protection in electrical installations, the pluggable installation connector is provided with mechanical protection against mismating. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). The WINSTA® MIDI pluggable installation connector with A coding in black or white is normally used for general mains applications in power distribution. This pluggable installation connector is used for electrical currents up to 20 A. Thus the product is ideally suitable for high power loads. Our WINSTA® MIDI product line allows flexibility for the installation. With its Push-in CAGE CLAMP® spring pressure connection technology, it achieves time-saving, error-free installation and offers flexibility and customization for meeting all installation requirements. This product meets all the mandatory safety requirements of fire class E; thus it can be used in areas where fire safety is relevant. In the production of this cable assembly, we eliminated the use of halogen. This is an important contribution to environmental protection.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable assembly is equipped with a plug and a free end. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Now you can also lower installation expenses without compromising safety and quality: with strain relief hosting eliminates the need for servicing and prevents unnecessary downtime.

- pluggable installation connectors with protection against mismating
- for automation controllers
- with A coding for use in a large number of general mains applications
- ready for immediate use
- rapid, structured electrical installation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 400 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 6 kV           | -   | -  |                                                 |  |
| Rated current        |  | 20 A           | -   | -  |                                                 |  |



| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 5                         | <b>Connection 1</b>             |                    |
| PE function                | Preceding PE contact      |                                 |                    |
| Conductor preparation      | ultrasonically tip-bonded |                                 |                    |
|                            |                           |                                 |                    |
|                            |                           |                                 |                    |
|                            |                           |                                 |                    |
|                            |                           |                                 |                    |
|                            |                           | Strip length                    | 9 mm / 0.35 inches |
|                            |                           | Pole number                     | 5                  |
|                            |                           | Sheathed cable diameter         | 11.2 ... 13.9 mm   |
|                            |                           | Wire cross-section              | 2.5 mm²            |
|                            |                           | Strip length (outer insulation) | 55 mm              |
|                            |                           | Connection type                 | Plug - free end    |

| Physical data |  |                         |
|---------------|--|-------------------------|
| Pin spacing   |  | 10 mm / 0.394 inches    |
| Width         |  | 47 mm / 1.85 inches     |
| Height        |  | 15.38 mm / 0.606 inches |
| Total length  |  | 4 m                     |

| Mechanical data                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Use                                     | General mains applications                                                                                    |
| Coding                                  | A                                                                                                             |
| Variable coding                         | Yes                                                                                                           |
| Marking                                 | N L1 L2 L3                                                                                                    |
| Potential marking                       | N L1 L2 L3                                                                                                    |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Plug - free end                                                                                               |
| Type of pre-assembled cable             | Connecting cable                                                                                              |
| Cable type                              | H05Z1Z1-F 5G2.5                                                                                               |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

| Plug-in connection            |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                      |                                         |                                                                          |
|------------------------------------|-----------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               |                                         | <a href="#">Information on material specifications can be found here</a> |
| Color                              | black                                   |                                                                          |
| Insulation material (main housing) | Polyamide (PA66)                        |                                                                          |
| Fire class per EN 50575            | E <sub>ca</sub>                         |                                                                          |
| Contact material                   | Copper or copper alloy; surface-treated |                                                                          |
| Contact Plating                    | Tin                                     |                                                                          |
| Fire load                          | 120.18 MJ                               |                                                                          |
| Connector color                    | black                                   |                                                                          |
| Strain relief color                | black                                   |                                                                          |
| Printing color of strain relief    | white                                   |                                                                          |
| Sheathed cable color               | black                                   |                                                                          |
| Printing color of sheathed cable   | white                                   |                                                                          |
| Halogen-free                       | Yes                                     |                                                                          |
| Silicon-free                       | Yes                                     |                                                                          |
| Sheath material                    | Halogen-free                            |                                                                          |
| Rubber cable                       | No                                      |                                                                          |
| Weight                             | 949.7 g                                 |                                                                          |
| Copper weight of the pipe          | 0.12 kg/m                               |                                                                          |

| Environmental requirements               |                                                                                                       |  |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|--|
| Processing temperature                   | -5 ... +40 °C                                                                                         |  |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |  |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |  |

| Commercial data       |               |  |
|-----------------------|---------------|--|
| eCl@ss 10.0           | 27-44-06-04   |  |
| eCl@ss 9.0            | 27-44-06-04   |  |
| ETIM 8.0              | EC002587      |  |
| ETIM 7.0              | EC002587      |  |
| PU (SPU)              | 1 pcs         |  |
| Packaging type        | unpacked      |  |
| Country of origin     | DE            |  |
| GTIN                  | 4044918274586 |  |
| Customs tariff number | 85444290900   |  |

| Environmental Product Compliance |                         |  |
|----------------------------------|-------------------------|--|
| RoHS Compliance Status           | Compliant, No Exemption |  |

| Approvals / Certificates                                |           |                                                            |
|---------------------------------------------------------|-----------|------------------------------------------------------------|
| General approvals                                       |           | Declarations of conformity and manufacturer's declarations |
|                                                         |           |                                                            |
| Approval                                                | Standard  | Certificate Name                                           |
| CCA<br>DEKRA Certification B.V.                         | IEC 61535 | NTR NL-7972                                                |
| KEMA/KEUR<br>DEKRA Certification B.V.                   | EN 61535  | 71-123834                                                  |
| Approval                                                | Standard  | Certificate Name                                           |
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -         | -                                                          |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -         | -                                                          |



|                                  |                  |  |  |
|----------------------------------|------------------|--|--|
| Downloads                        |                  |  |  |
| Environmental Product Compliance |                  |  |  |
| Compliance Search                |                  |  |  |
| Environmental Product Compliance | 771-9995/217-401 |  |  |

|                  |            |                 |  |
|------------------|------------|-----------------|--|
| Documentation    |            |                 |  |
| Bid Text         |            |                 |  |
| 771-9995/217-401 | 19.02.2019 | xml<br>3.00 KB  |  |
| 771-9995/217-401 | 11.12.2014 | doc<br>25.50 KB |  |

|              |                  |                   |                  |
|--------------|------------------|-------------------|------------------|
| CAD/CAE-Data |                  |                   |                  |
| CAD data     |                  | CAE data          |                  |
| 2D/3D Models | 771-9995/217-401 | EPLAN Data Portal | 771-9995/217-401 |
|              |                  |                   |                  |
|              |                  | WSCAD Universe    | 771-9995/217-401 |
|              |                  |                   |                  |
|              |                  | ZUKEN Portal      | 771-9995/217-401 |
|              |                  |                   |                  |

|                                                                                                   |                                                                                                   |                                                                                                 |                                                                                                 |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| 1 Compatible Products                                                                             |                                                                                                   |                                                                                                 |                                                                                                 |
| 1.1 Required Accessories                                                                          |                                                                                                   |                                                                                                 |                                                                                                 |
| 1.1.1 Locking system                                                                              |                                                                                                   |                                                                                                 |                                                                                                 |
| 1.1.1.1 Locking system                                                                            |                                                                                                   |                                                                                                 |                                                                                                 |
|                                                                                                   |                                                                                                   |                                                                                                 |                                                                                                 |
| <a href="#">Item No.: 770-101</a><br>Locking lever; for flying leads; for manual operation; black | <a href="#">Item No.: 770-121</a><br>Locking lever; for flying leads; for manual operation; white | <a href="#">Item No.: 770-111</a><br>Locking lever; for flying leads; for tool operation; black | <a href="#">Item No.: 770-131</a><br>Locking lever; for flying leads; for tool operation; white |

|                                                                                        |                                                                                              |
|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| 1.2 Optional Accessories                                                               |                                                                                              |
| 1.2.1 Cover                                                                            |                                                                                              |
| 1.2.1.1 Cover                                                                          |                                                                                              |
|                                                                                        |                                                                                              |
| <a href="#">Item No.: 770-360</a><br>Lockout cap; for plugs; 5-pole; separable; yellow | <a href="#">Item No.: 897-2005</a><br>Protective cap; Type4; for sockets and plugs; PVC; red |

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white