



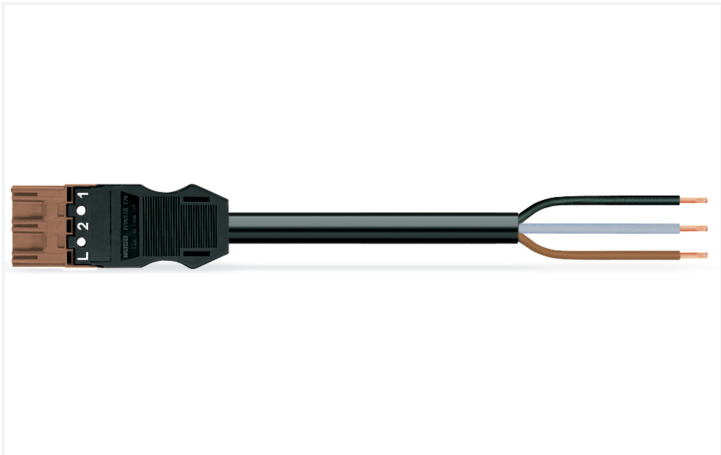

Color: ■ brown

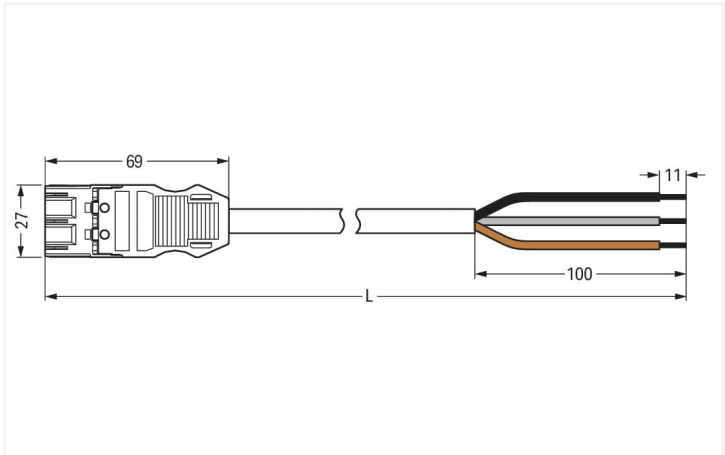

Dimensions in mm

Cable assembly WINSTA® MIDI with strain relief

The WINSTA® MIDI cable assembly S coding allows installation of solid and fine-stranded conductors. The pluggable installation connectors with spring pressure connection technology function completely without screw connections. They allow fast, efficient, error-free installation in numerous applications. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). That results in the fact that users' fingers will never come into contact with live elements. Light switches and outlets can be integrated with the help of WINSTA® MIDI pluggable installation connectors with S coding in brown. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in a broad range of individual products you can use for quick, easy and maximally flexible electrical installation. Building safety must be ensured at all times, even after the electrical installation stage. The required safety requirements in connection with EU CPR are fully satisfied by this product through fire class E.

Pluggable connections instead of screw connections – cable assemblies from WAGO

A plug and a free end are available. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Choose quality and durability – with marking from WAGO makes the installation of electrical components visibly easier.

- pluggable installation connectors with protection against mismatching
- for automation controllers
- with S coding for use in components such as motors or frequency converters
- ready to install and use immediately
- rapid, structured electrical installation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data						
Ratings per		IEC/EN 60664-1			General information	
Overvoltage category		III	III	II	Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket
Pollution degree		3	2	2		
Nominal voltage		250 V	-	-		
Rated surge voltage		4 kV	-	-		
Rated current		16 A	-	-		



Connection data		
Total number of potentials	3	Connection 1
Conductor preparation	ultrasonically tip-bonded	
Strip length	11 mm / 0.43 inches	
Pole number	3	
Wire cross-section	1.5 mm²	
Strip length (outer insulation)	100 mm	
Connection type	Plug - free end	

Physical data		
Pin spacing	10 mm / 0.394 inches	
Width	27 mm / 1.063 inches	
Height	12.9 mm / 0.508 inches	
Total length	8 m	

Mechanical data		
Use	Switching function	
Coding	S	
Variable coding	No	
Marking	1 2 L	
Potential marking	1 2 L	
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)	
Retention force of a plug-in connection	when locked: > 80N	
Unmating force of a plug-in connection	when unlocked: approx. 20 ... 70 N (depending on pole number)	
Number of mating cycles	200, without resistive load	
Connection type	Plug - free end	
Type of pre-assembled cable	Connecting cable	
Cable type	H05VV-F 3x1.5	
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)	
Suitable	for distribution connectors; series and two-way circuits	

Plug-in connection		
Mismating protection	Yes	
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole	
Locking lever	Can be retrofitted	
Locking of plug-in connection	Locking lever	
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).	



Material data		
Note (material data)		Information on material specifications can be found here
Color	brown	
Insulation material (main housing)	Polyamide (PA66)	
Flammability class per UL94	V0	
Fire class per EN 50575	E _{ca}	
Contact material	Copper or copper alloy; surface-treated	
Contact Plating	Tin	
Fire load	239.603 MJ	
Connector color	brown	
Strain relief color	black	
Printing color of strain relief	white	
Sheathed cable color	black	
Printing color of sheathed cable	white	
Halogen-free	No	
Silicon-free	Yes	
Sheath material	PVC	
Rubber cable	No	
Weight	797.6 g	
Copper weight of the pipe	0.043 kg/m	

Environmental requirements		
Processing temperature	-5 ... +40 °C	
Continuous operating temperature	-35 ... +85 °C	
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C	

Commercial data		
eCl@ss 10.0	27-44-06-04	
eCl@ss 9.0	27-44-06-04	
ETIM 9.0	EC002587	
ETIM 8.0	EC002587	
PU (SPU)	1 pcs	
Packaging type	unpacked	
Country of origin	DE	
GTIN	4050821310976	
Customs tariff number	85444290900	

Environmental Product Compliance		
RoHS Compliance Status	Compliant, No Exemption	

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7355	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123834			



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance			↓
771-9973/206-805			

Documentation

Bid Text			
771-9973/206-805	19.02.2019	xml 3.07 KB	↓
771-9973/206-805	13.08.2018	doc 26.00 KB	↓

CAD/CAE-Data

CAE data			
WSCAD Universe			↓
771-9973/206-805			

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 770-101](#)
Locking lever; for flying leads; for manual operation; black



[Item No.: 770-121](#)
Locking lever; for flying leads; for manual operation; white



[Item No.: 770-111](#)
Locking lever; for flying leads; for tool operation; black



[Item No.: 770-131](#)
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-360](#)
Lockout cap; for plugs; 5-pole; separable; yellow



[Item No.: 897-2003](#)
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)
Marker card; Plastic; red



[Item No.: 770-450](#)
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white