




Similar to illustration

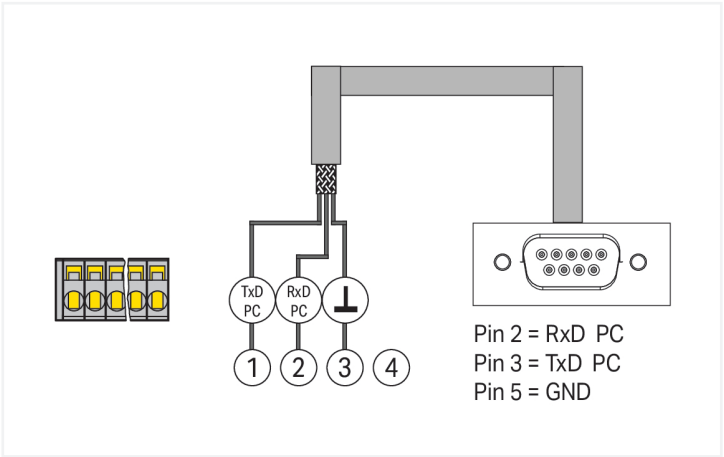

Features:

- WAGO's communication cable is used for configuration and visualization via PC or controller.
- It is suitable for 787-1675 devices.
- Download the corresponding PC software for all 787 Series devices at www.wago.com.
- Function blocks for communication with the WAGO I/O System 750 and other control systems are also available.

Notes	
Note	The communication cable is not electrically isolated.

Technical data	
Signaling and communication	
Signaling	1 x RS-232 cable
Communications	RS-232 serial interface

Safety and protection	
Protection type	IP20; per EN 60529

Connection data	
Cable type	3 x 0.34 mm²; shielded
Connection 1	
Connection type 1	Module side (787-1675)
Connection technology	1 x 4-pole female connector (734-104) with strain relief
Connection 2	
Connection type	PC/controller side
Connection technology	1 x 9 pole D-sub socket



Physical data	
Cable length	1.8 m

Material data	
Fire load	0 MJ
Weight	97 g

Environmental requirements	
Ambient temperature (operation)	-10 ... +70 °C

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-06-18-90
eCl@ss 9.0	27-06-03-11
ETIM 9.0	EC001408
ETIM 8.0	EC001408
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821787402
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-892

↓

- 1 Compatible Products
- 1.1 Optional Accessories
- 1.1.1 Cables and connectors
- 1.1.1.1 Connecting cable



Item No.: 761-9005
USB adapter; with 1m connection cable