




Color: ■ black

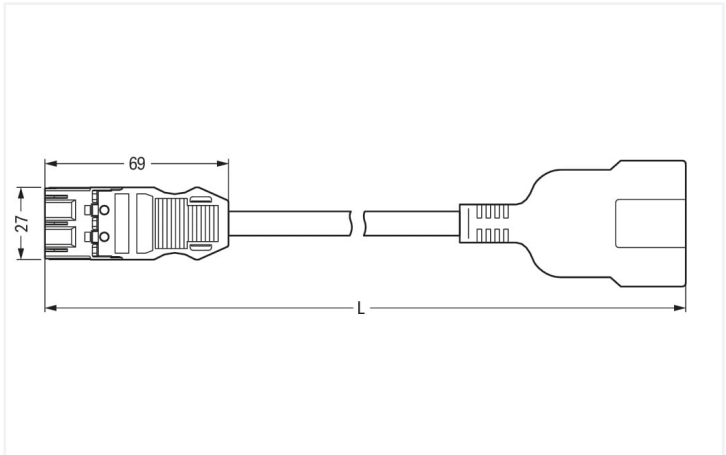

Dimensions in mm

Cable assembly WINSTA® MIDI with strain relief

The WINSTA® MIDI cable assembly A coding is the pluggable solution for your application in control cabinets, on PCBs or for lighting connections. Our pluggable installation connectors with spring pressure connection technology function completely without screw connections. They allow flexible, error-free installation in a large number of applications. The coding options reduce installation errors, allowing fast, secure wiring of all components. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with energised contact elements. Thanks to the color coding and mechanical A coding of WINSTA® MIDI pluggable installation connectors, you can clearly distinguish different circuits. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in a broad range of individual products you can use for quick, easy and maximally flexible electrical installation. According to the European CPR, the fire class of the cables used for construction is essential for the safety of buildings, too. For houses with medium-level safety requirements, cable assemblies with fire class E are suitable.

Fast, secure pluggable connections – cable assemblies from WAGO

A plug and a SCHUKO socket are available. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology tool! Plan your installation with with fire class E from WAGO.

- protection against mismatching eliminates errors
- pre-assembled versions
- with A coding for use in many general mains applications
- ready for immediate use
- fast, secure installation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 250 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 4 kV           | -   | -  |                                                 |  |
| Rated current        |  | 16 A           | -   | -  |                                                 |  |



Connection data

|                            |                      |                    |                      |
|----------------------------|----------------------|--------------------|----------------------|
| Total number of potentials | 3                    | Connection 1       |                      |
| PE function                | Preceding PE contact | Pole number        | 3                    |
|                            |                      | Wire cross-section | 1.5 mm²              |
|                            |                      | Connection type    | Plug - SCHUKO socket |

Physical data

|              |                      |
|--------------|----------------------|
| Pin spacing  | 10 mm / 0.394 inches |
| Width        | 54 mm / 2.126 inches |
| Height       | 54 mm / 2.126 inches |
| Total length | 2 m                  |

Mechanical data

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Use                                     | General mains applications                                                                                    |
| Coding                                  | A                                                                                                             |
| Variable coding                         | Yes                                                                                                           |
| Marking                                 | L ⊕ N                                                                                                         |
| Potential marking                       | L ⊕ N                                                                                                         |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Plug - SCHUKO socket                                                                                          |
| Type of pre-assembled cable             | Adapter cable                                                                                                 |
| Cable type                              | H05VV-F 3G1.5                                                                                                 |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                        |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

Material data

|                                    |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | black                                                                    |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Fire class per EN 50575            | E <sub>ca</sub>                                                          |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 30.327 MJ                                                                |
| Connector color                    | black                                                                    |
| Strain relief color                | black                                                                    |
| Printing color of strain relief    | white                                                                    |
| Sheathed cable color               | black                                                                    |



| Material data             |            |
|---------------------------|------------|
| Halogen-free              | No         |
| Silicon-free              | Yes        |
| Sheath material           | PVC        |
| Rubber cable              | No         |
| Weight                    | 325 g      |
| Copper weight of the pipe | 0.043 kg/m |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| Product Group         | 20 (Winsta)   |
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4044918272209 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance          |                                      |
|-------------------------------------------|--------------------------------------|
| CAS-No.                                   | 7439-92-1                            |
| REACH Candidate List Substance            | Lead                                 |
| RoHS Compliance Status                    | Compliant,With Exemption             |
| RoHS Exemption                            | 6(c)                                 |
| SCIP notification number (Austria)        | 01c10cac-2927-410d-8dec-b9c2bff4697f |
| SCIP notification number (Belgium)        | 43a41bb5-4c35-4fbe-97e3-f4516ed7f2b4 |
| SCIP notification number (Bulgaria)       | dee7373e-6a03-451c-95dc-2fccb68b86cd |
| SCIP notification number (Czech Republic) | 5566d851-a4b8-411d-8a13-9ca79209b5b2 |
| SCIP notification number (Denmark)        | 1dc93de3-9512-4923-9476-2a97f9f351f5 |
| SCIP notification number (Finland)        | 039adadc-795b-4e2e-8dd5-d4bdb8a6e654 |
| SCIP notification number (France)         | 0a052081-851a-4e0b-8b2a-302325dc2ae9 |
| SCIP notification number (Germany)        | 4d0b6358-8454-4c75-83d1-b2401897ddb0 |
| SCIP notification number (Hungary)        | d3b2d159-e322-40f9-baf7-20f13502e77a |
| SCIP notification number (Italy)          | 1eb10ce1-edfb-48e5-b04d-0398e235c323 |
| SCIP notification number (Netherlands)    | efcc6f5-cd83-4372-85b3-b6cd93f1b630  |
| SCIP notification number (Poland)         | d1fbbefd-58ca-4300-9380-3a166a819b60 |
| SCIP notification number (Romania)        | ce46c36d-34b2-48c4-a34b-b4b2c9210a90 |
| SCIP notification number (Sweden)         | 5df0a4bb-8532-4606-8691-5c6b71216776 |



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance  
771-9993/406-201

↓

Documentation

Bid Text

771-9993/406-201

19.02.2019

xml  
2.91 KB

↓

771-9993/406-201

04.12.2014

doc  
23.00 KB

↓

CAD/CAE-Data

CAE data

EPLAN Data Portal  
771-9993/406-201

↓

WSCAD Universe  
771-9993/406-201

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 770-101](#)  
Locking lever; for flying leads; for manual operation; black



[Item No.: 770-121](#)  
Locking lever; for flying leads; for manual operation; white



[Item No.: 770-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 770-131](#)  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-360](#)  
Lockout cap; for plugs; 5-pole; separable; yellow



[Item No.: 897-2003](#)  
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white