



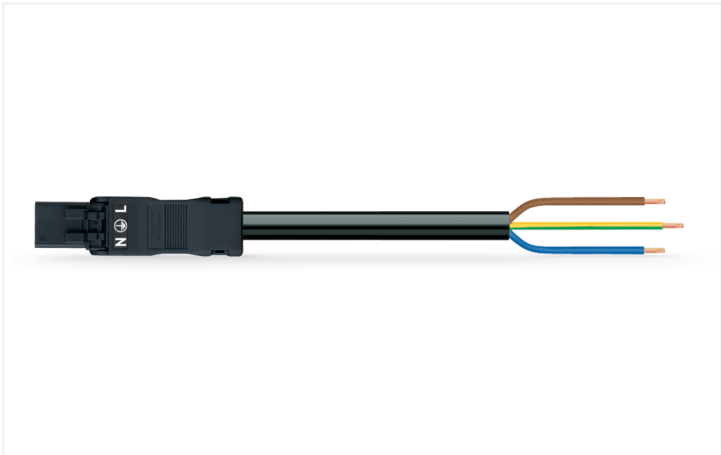

Color: ■ black

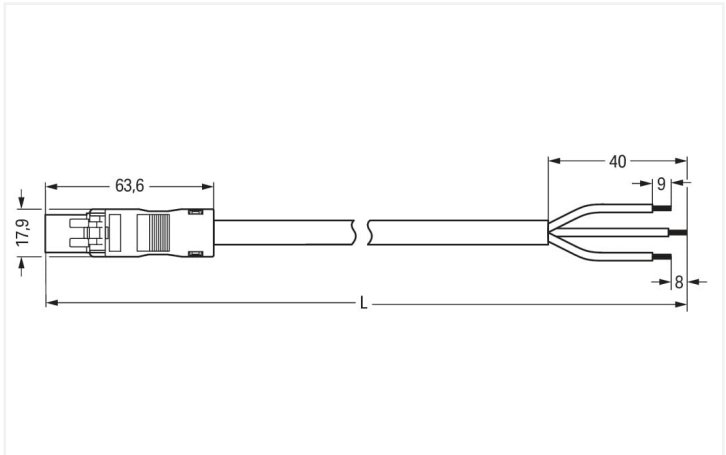

Dimensions in mm

Cable assembly WINSTA® MINI rated current 10 A

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MINI cable assembly A coding. WAGO pluggable installation connectors can be used when criteria repeat or are distributed on a specific pattern, for example for installing grid lighting or flush-mount lighting. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The WINSTA® MINI pluggable installation connector with A coding in black or white is usually used for general mains applications in power distribution. WINSTA® MINI follows the trend towards miniaturisation. Our smallest pluggable connection system is very good for lights, for example, since due to LED technology, these offer less and less space for the connection technology. According to the European CPR, the fire class of the cables used for construction is essential for the safety of buildings as well. For houses with medium-level safety requirements, cable assemblies with fire class E are suitable. Eliminating halogens as an additive in the production of this cable assembly significantly increases fire safety and reduces environmental pollution.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable assembly is provided with a plug and a free end. WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It ensures fast, secure and, above all, error-free installation of components and cables. Choose quality and durability – with marking from WAGO makes the installation of electrical components visibly easier.

- pluggable installation connectors with protection against mismatching
- easy tool-free operation, a wide range of coding options
- with A coding for a great number of uses
- ready for immediate use
- quick replacement of defective units during ongoing operation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 250 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 4 kV           | -   | -  |                                                 |  |
| Rated current        |  | 10 A           | -   | -  |                                                 |  |



| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 3                         | Connection 1                    |                    |
| PE function                | Preceding PE contact      | Strip length                    | 9 mm / 0.35 inches |
| Conductor preparation      | ultrasonically tip-bonded | Pole number                     | 3                  |
|                            |                           | Wire cross-section              | 1 mm²              |
|                            |                           | Strip length (outer insulation) | 40 mm              |
|                            |                           | Connection type                 | Plug - free end    |

| Physical data |  |                        |
|---------------|--|------------------------|
| Pin spacing   |  | 4.4 mm / 0.173 inches  |
| Width         |  | 17.9 mm / 0.705 inches |
| Height        |  | 14 mm / 0.551 inches   |
| Total length  |  | 3 m                    |

| Mechanical data                         |  |                                                               |
|-----------------------------------------|--|---------------------------------------------------------------|
| Use                                     |  | General mains applications                                    |
| Coding                                  |  | A                                                             |
| Variable coding                         |  | No                                                            |
| Marking                                 |  | L ⊕ N                                                         |
| Potential marking                       |  | L ⊕ N                                                         |
| Mating force of a plug-in connection    |  | approx. 20 ... 70 N (depending on pole number)                |
| Retention force of a plug-in connection |  | when locked: > 80N                                            |
| Unmating force of a plug-in connection  |  | when unlocked: approx. 20 ... 70 N (depending on pole number) |
| Number of mating cycles                 |  | 200, without resistive load                                   |
| Connection type                         |  | Plug - free end                                               |
| Type of pre-assembled cable             |  | Connecting cable                                              |
| Cable type                              |  | H05Z1Z1-F 3G1                                                 |
| Protection type                         |  | IP20; IP40 when mated                                         |

| Plug-in connection            |  |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          |  | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  |  | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                        |
| Locking lever                 |  | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection |  | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        |  | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

| Material data                      |  |                                                                          |
|------------------------------------|--|--------------------------------------------------------------------------|
| Note (material data)               |  | <a href="#">Information on material specifications can be found here</a> |
| Color                              |  | black                                                                    |
| Insulation material (main housing) |  | Polyamide (PA66)                                                         |
| Fire class per EN 50575            |  | E <sub>ca</sub>                                                          |
| Contact material                   |  | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    |  | Tin                                                                      |
| Fire load                          |  | 89.857 MJ                                                                |
| Connector color                    |  | black                                                                    |
| Strain relief color                |  | black                                                                    |



| Material data                    |              |
|----------------------------------|--------------|
| Sheathed cable color             | black        |
| Printing color of sheathed cable | white        |
| Halogen-free                     | Yes          |
| Silicon-free                     | Yes          |
| Sheath material                  | Halogen-free |
| Rubber cable                     | No           |
| Weight                           | 225.5 g      |
| Copper weight of the pipe        | 0.029 kg/m   |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | PL            |
| GTIN                  | 4055143397186 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

| Approvals / Certificates |                                                            |
|--------------------------|------------------------------------------------------------|
| General approvals        | Declarations of conformity and manufacturer's declarations |



| Approval                              | Standard | Certificate Name |
|---------------------------------------|----------|------------------|
| CCA<br>DEKRA Certification B.V.       | EN 61535 | NTR NL-7971      |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 61535 | 71-123232        |

| Approval                                                | Standard | Certificate Name |
|---------------------------------------------------------|----------|------------------|
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                |



Downloads

Environmental Product Compliance

|                                  |  |  |   |
|----------------------------------|--|--|---|
| Compliance Search                |  |  |   |
| Environmental Product Compliance |  |  | ↓ |
| 891-8993/215-301                 |  |  |   |

Documentation

|                  |            |                 |   |
|------------------|------------|-----------------|---|
| Bid Text         |            |                 |   |
| 891-8993/215-301 | 19.02.2019 | xml<br>3.03 KB  | ↓ |
| 891-8993/215-301 | 26.11.2014 | doc<br>25.00 KB | ↓ |

CAD/CAE-Data

|                   |  |  |   |
|-------------------|--|--|---|
| CAE data          |  |  |   |
| EPLAN Data Portal |  |  | ↓ |
| 891-8993/215-301  |  |  |   |
| WSCAD Universe    |  |  | ↓ |
| 891-8993/215-301  |  |  |   |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)  
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)  
Locking lever; for manual operation; black



[Item No.: 890-121](#)  
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2001](#)  
Protective cap; Type1; for sockets and plugs; PVC; red



1.2.2 Installation

1.2.2.1 Mounting accessories



**Item No.: 890-310**  
Mounting carrier; 2- to 5-pole; for flying leads; black

**Item No.: 890-311**  
Mounting carrier; 2- to 5-pole; for flying leads; white