




Color: ■ blue

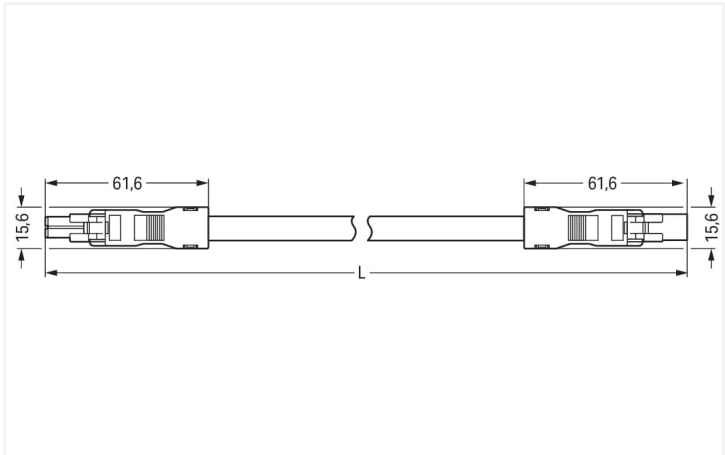

Dimensions in mm

Cable assembly WINSTA® MINI with protection against mismating

The WINSTA® MINI cable assembly I coding allows installation of solid and fine-stranded conductors. Our pluggable installation connectors with spring pressure connection technology function entirely without screw connections. They allow resource-efficient, error-free installation in numerous applications. For greater security in electrical installations, the pluggable installation connector is provided with mechanical protection against mismating. WINSTA® MINI pluggable installation connectors with I coding in blue are above all suitable for lighting management, for instance for the dimming function of DALI lights. WINSTA® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is especially suitable for lights, for example, since as a result of LED technology; due to complex systems, these offer less and less space for the connection technology. This product meets all the relevant safety requirements of fire class E; therefore it can be used in domains where fire safety is relevant. Not using halogen additives in the production of this cable assembly significantly improves fire safety and reduces environmental contamination.

Fast, secure pluggable connections – cable assemblies from WAGO

A socket and a plug are provided. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Choose quality and durability – with strain relief hosting from WAGO makes the installation of electrical components noticeably easier.

- protection against mismating eliminates errors
- easy tool-free operation, a wide range of coding options
- for intelligent, easy lighting installation
- ready for immediate use
- convenient installation and commissioning

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data				General information	
Ratings per		IEC/EN 60664-1		Note on contact resistance	
Overvoltage category	III	III	II	approx. 1 mΩ of contact resistance	
Pollution degree	3	2	2	approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage	250 V	-	-		
Rated surge voltage	4 kV	-	-		
Rated current	16 A	-	-		



Connection data		
Total number of potentials	2	
		Connection 1
	Pole number	2
	Wire cross-section	1.5 mm²
	Connection type	Socket - Plug
Physical data		
Pin spacing		4.4 mm / 0.173 inches
Width		15.6 mm / 0.614 inches
Height		13.2 mm / 0.52 inches
Total length		7 m
Mechanical data		
Use		DALI, Lighting Management
Coding		I
Variable coding		No
Marking		+ -
Potential marking		+ -
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection		when locked: > 80N
Unmating force of a plug-in connection		when unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles		200, without resistive load
Connection type		Socket - Plug
Type of pre-assembled cable		Interconnecting cable
Cable type		H05Z1Z1-F 2x1.5
Protection type		IP20; IP40 when mated
Plug-in connection		
Mismating protection		Yes
Note on mismating protection		All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever		Can be retrofitted
Locking of plug-in connection		Locking lever
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).
Material data		
Note (material data)		Information on material specifications can be found here
Color		blue
Insulation material (main housing)		Polyamide (PA66)
Fire class per EN 50575		E _{ca}
Contact material		Copper or copper alloy; surface-treated
Contact Plating		Tin
Fire load		209.324 MJ
Connector color		blue
Strain relief color		white
Sheathed cable color		white
Printing color of sheathed cable		black



Material data	
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	561.8 g
Copper weight of the pipe	0.029 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 9.0	EC002587
ETIM 8.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143392556
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7971
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123232

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance			↓
891-8982/016-702			

Documentation

Bid Text			
891-8982/016-702	19.02.2019	xml 3.00 KB	↓
891-8982/016-702	24.11.2014	doc 24.50 KB	↓

CAD/CAE-Data

CAE data			
WSCAD Universe			↓
891-8982/016-702			

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)
Locking lever; for manual operation; black



[Item No.: 890-121](#)
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2001](#)
Protective cap; Type1; for sockets and plugs; PVC; red



1.2.2 Installation

1.2.2.1 Mounting accessories



Item No.: 890-310
Mounting carrier; 2- to 5-pole; for flying leads; black

Item No.: 890-311
Mounting carrier; 2- to 5-pole; for flying leads; white