




Color: ■ black

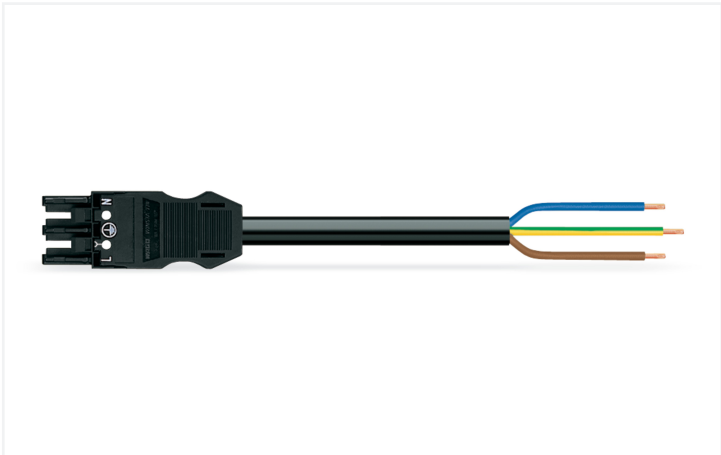

Dimensions in mm

Cable assembly WINSTA® MIDI 3-pole

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MIDI cable assembly with protection against mismatching. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to many different requirements in next to no time. For greater protection in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismatching. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). General mains applications for almost any domain of use can be realised with WINSTA® MIDI pluggable installation connectors with A coding. The rated current and voltage are important criteria for selecting a pluggable installation connector: They provide information about possible domains of use and applications. This product has a current rating of 20 A – so it is also suitable for powerful loads. Our WINSTA® MIDI product line guarantees maximum flexibility for the installation. Through its Push-in CAGE CLAMP® spring pressure connection technology, it achieves time-saving, error-free installation and offers customization and flexibility for meeting all installation requirements. This product meets all the mandatory safety requirements of fire class E; thus it can be used in areas where fire safety is relevant.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a free end. The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, more reliable, and error-free. Using this pre-assembled system reduces assembly times and installation errors at the construction site. Now you can also lower installation expenses without compromising quality and safety: with marking reduces the need for servicing and prevents unnecessary downtime.

- protection against mismatching eliminates errors
- simple circuits
- suitable for any application
- custom-engineered solutions
- fast, secure installation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |       |                |    | General information        |                                                                                          |
|----------------------|-------|----------------|----|----------------------------|------------------------------------------------------------------------------------------|
| Ratings per          |       | IEC/EN 60664-1 |    | Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/<br>socket |
| Overvoltage category | III   | III            | II |                            |                                                                                          |
| Pollution degree     | 3     | 2              | 2  |                            |                                                                                          |
| Nominal voltage      | 250 V | -              | -  |                            |                                                                                          |
| Rated surge voltage  | 4 kV  | -              | -  |                            |                                                                                          |
| Rated current        | 20 A  | -              | -  |                            |                                                                                          |



| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 3                         | Connection 1                    |                    |
| PE function                | Preceding PE contact      | Strip length                    | 9 mm / 0.35 inches |
| Conductor preparation      | ultrasonically tip-bonded | Pole number                     | 3                  |
|                            |                           | Wire cross-section              | 2.5 mm²            |
|                            |                           | Strip length (outer insulation) | 55 mm              |
|                            |                           | Connection type                 | Socket - free end  |

| Physical data |  |                        |
|---------------|--|------------------------|
| Pin spacing   |  | 10 mm / 0.394 inches   |
| Width         |  | 27 mm / 1.063 inches   |
| Height        |  | 12.9 mm / 0.508 inches |
| Total length  |  | 2 m                    |

| Mechanical data                         |  |                                                                                                               |
|-----------------------------------------|--|---------------------------------------------------------------------------------------------------------------|
| Use                                     |  | General mains applications                                                                                    |
| Coding                                  |  | A                                                                                                             |
| Variable coding                         |  | Yes                                                                                                           |
| Marking                                 |  | L ⊕ N                                                                                                         |
| Potential marking                       |  | L ⊕ N                                                                                                         |
| Mating force of a plug-in connection    |  | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection |  | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  |  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 |  | 200, without resistive load                                                                                   |
| Connection type                         |  | Socket - free end                                                                                             |
| Type of pre-assembled cable             |  | Connecting cable                                                                                              |
| Cable type                              |  | H05VV-F 3G2.5                                                                                                 |
| Protection type                         |  | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

| Plug-in connection            |  |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          |  | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  |  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 |  | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection |  | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        |  | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                      |                                         |                                                                          |
|------------------------------------|-----------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               |                                         | <a href="#">Information on material specifications can be found here</a> |
| Color                              | black                                   |                                                                          |
| Insulation material (main housing) | Polyamide (PA66)                        |                                                                          |
| Fire class per EN 50575            | E <sub>ca</sub>                         |                                                                          |
| Contact material                   | Copper or copper alloy; surface-treated |                                                                          |
| Contact Plating                    | Tin                                     |                                                                          |
| Fire load                          | 59.712 MJ                               |                                                                          |
| Connector color                    | black                                   |                                                                          |
| Strain relief color                | black                                   |                                                                          |
| Printing color of strain relief    | white                                   |                                                                          |
| Sheathed cable color               | black                                   |                                                                          |
| Printing color of sheathed cable   | white                                   |                                                                          |
| Halogen-free                       | No                                      |                                                                          |
| Silicon-free                       | Yes                                     |                                                                          |
| Sheath material                    | PVC                                     |                                                                          |
| Rubber cable                       | No                                      |                                                                          |
| Weight                             | 312 g                                   |                                                                          |
| Copper weight of the pipe          | 0.072 kg/m                              |                                                                          |

| Environmental requirements               |                                                                                                       |  |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|--|
| Processing temperature                   | -5 ... +40 °C                                                                                         |  |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |  |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |  |

| Commercial data       |               |  |
|-----------------------|---------------|--|
| eCl@ss 10.0           | 27-44-06-04   |  |
| eCl@ss 9.0            | 27-44-06-04   |  |
| ETIM 9.0              | EC002587      |  |
| ETIM 8.0              | EC002587      |  |
| PU (SPU)              | 1 pcs         |  |
| Packaging type        | unpacked      |  |
| Country of origin     | DE            |  |
| GTIN                  | 4044918586238 |  |
| Customs tariff number | 85444290900   |  |

| Environmental Product Compliance |                         |  |
|----------------------------------|-------------------------|--|
| RoHS Compliance Status           | Compliant, No Exemption |  |

| Approvals / Certificates                                |          |                                                            |
|---------------------------------------------------------|----------|------------------------------------------------------------|
| General approvals                                       |          | Declarations of conformity and manufacturer's declarations |
|                                                         |          |                                                            |
| Approval                                                | Standard | Certificate Name                                           |
| CCA<br>DEKRA Certification B.V.                         | EN 61535 | NTR NL-7972                                                |
| KEMA/KEUR<br>DEKRA Certification B.V.                   | EN 61535 | 71-123834                                                  |
| Approval                                                | Standard | Certificate Name                                           |
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance  
771-9993/107-201

↓

Documentation

Bid Text

|                  |            |                 |   |
|------------------|------------|-----------------|---|
| 771-9993/107-201 | 19.02.2019 | xml<br>2.97 KB  | ↓ |
| 771-9993/107-201 | 05.12.2014 | doc<br>26.50 KB | ↓ |

CAD/CAE-Data

CAD data

2D/3D Models  
771-9993/107-201

↓

CAE data

EPLAN Data Portal  
771-9993/107-201

↓

WSCAD Universe  
771-9993/107-201

↓

ZUKEN Portal  
771-9993/107-201

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 770-101](#)  
Locking lever; for flying leads; for manual operation; black



[Item No.: 770-121](#)  
Locking lever; for flying leads; for manual operation; white



[Item No.: 770-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 770-131](#)  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-201](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



[Item No.: 770-221](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



[Item No.: 897-2003](#)  
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white