



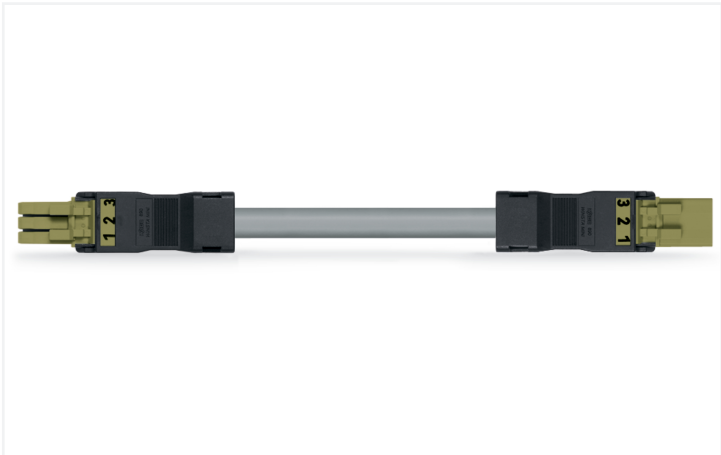

Color: ■ light green

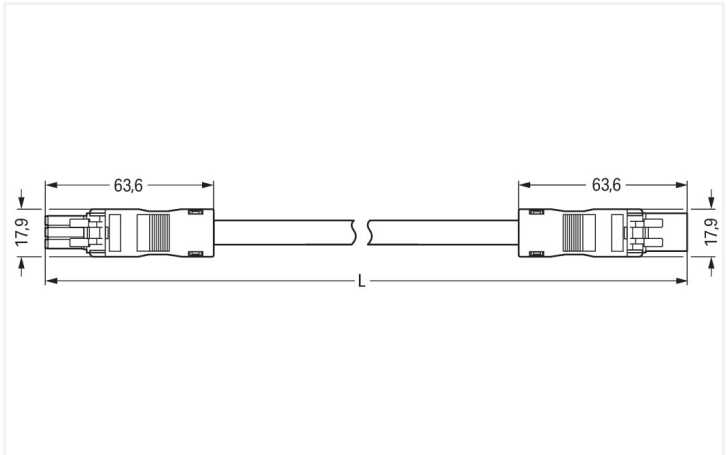

Dimensions in mm

Cable assembly WINSTA® MINI with protection against mismatching

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MINI cable assembly with protection against mismatching. Whether on PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to establish connections according to various requirements in next to no time. For greater security in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismatching. Solutions like the WINSTA® MINI pluggable installation connectors with B coding are appropriate for process control, for example, for lighting or within data networks. Due to its particularly minimal dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very restricted spaces, i.e., for installations when very little room is available. According to the European CPR, the fire class of the cables used in construction is essential for the safety of buildings as well. For buildings with medium-level safety requirements, cable assemblies with fire class E are suitable.

Fast, error-free assembly thanks to cable assemblies from WAGO

The cable assembly is provided with a socket and a plug. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Now you can also cut installation costs without compromising quality and safety: with protection against mismatching eliminates the need for servicing and prevents unnecessary downtime.

- protection against mismatching eliminates errors
- compact design for conductors with a cross-section up to 1.5 mm²
- with B coding for use in process automation, such as lighting technology, for instance
- ready for immediate use
- rapid, structured electrical installation

| Notes     |                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note      | Cables with a different fire class can be found in the eShop.                                                                                                                       |
| Variants: | Other pole markings<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 250 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 4 kV           | -   | -  |                                                 |  |
| Rated current        |  | 10 A           | -   | -  |                                                 |  |



Connection data

|                            |   |                    |               |
|----------------------------|---|--------------------|---------------|
| Total number of potentials | 3 | Connection 1       |               |
|                            |   | Pole number        | 3             |
|                            |   | Wire cross-section | 1 mm²         |
|                            |   | Connection type    | Socket - Plug |

Physical data

|              |                        |
|--------------|------------------------|
| Pin spacing  | 4.4 mm / 0.173 inches  |
| Width        | 17.9 mm / 0.705 inches |
| Height       | 14 mm / 0.551 inches   |
| Total length | 6 m                    |

Mechanical data

|                                         |                                                               |
|-----------------------------------------|---------------------------------------------------------------|
| Use                                     | Control technology                                            |
| Coding                                  | B                                                             |
| Variable coding                         | No                                                            |
| Marking                                 | 1 2 3                                                         |
| Potential marking                       | 1 2 3                                                         |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                |
| Retention force of a plug-in connection | when locked: > 80N                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number) |
| Number of mating cycles                 | 200, without resistive load                                   |
| Connection type                         | Socket - Plug                                                 |
| Type of pre-assembled cable             | Interconnecting cable                                         |
| Cable type                              | H05VV-F 3x1                                                   |
| Protection type                         | IP20; IP40 when mated                                         |

Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

Material data

|                                    |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | light green                                                              |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Fire class per EN 50575            | E <sub>ca</sub>                                                          |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 0.543 MJ                                                                 |
| Connector color                    | light green                                                              |
| Strain relief color                | black                                                                    |
| Sheathed cable color               | gray                                                                     |
| Printing color of sheathed cable   | black                                                                    |



| Material data             |            |
|---------------------------|------------|
| Halogen-free              | No         |
| Silicon-free              | Yes        |
| Sheath material           | PVC        |
| Rubber cable              | No         |
| Weight                    | 450.6 g    |
| Copper weight of the pipe | 0.029 kg/m |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | PL            |
| GTIN                  | 4055143514415 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

Downloads

Environmental Product Compliance

| Compliance Search                                    |  |
|------------------------------------------------------|--|
| Environmental Product Compliance<br>891-8993/005-605 |  |

Documentation

| Bid Text         |            |                 |  |
|------------------|------------|-----------------|--|
| 891-8993/005-605 | 19.02.2019 | xml<br>2.95 KB  |  |
| 891-8993/005-605 | 02.06.2015 | doc<br>24.00 KB |  |

CAD/CAE-Data

CAE data

EPLAN Data Portal  
891-8993/005-605

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)  
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)  
Locking lever; for manual operation; black



[Item No.: 890-121](#)  
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2001](#)  
Protective cap; Type1; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 890-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black



[Item No.: 890-311](#)  
Mounting carrier; 2- to 5-pole; for flying leads; white