



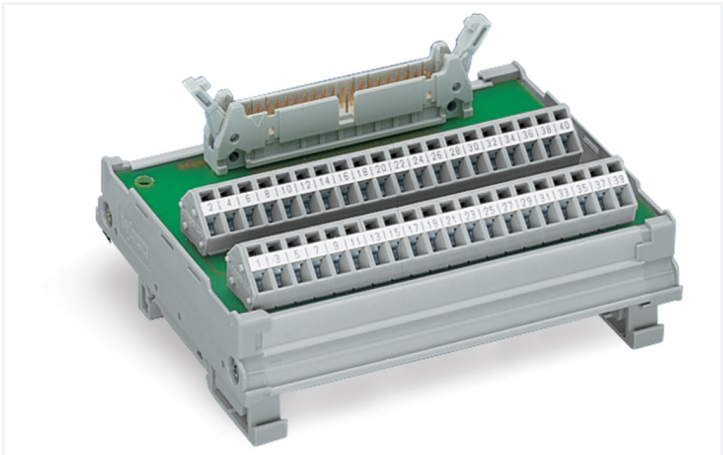

Similar to illustration

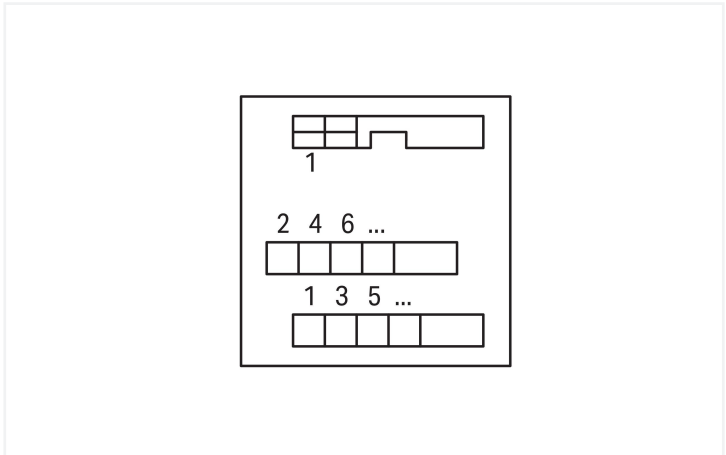

Electrical data

Operating voltage	≤ 125 VAC/VDC
Nominal current	1 A

Safety and protection

Rated Voltage	125 V
Rated impulse withstand voltage	0.8 kV
Pollution degree	2
Protection type	IP20
Insulation type	Basic insulation

Connection data

Performance level	3 / 50 mating cycles
-------------------	----------------------

Connection 1	
Pluggable connector	DIN 41651 connector; male connector
Pole number 1	10
Connection type 1	System
Note (conductor cross-section)	12 AWG: THHN, THWN
Mating direction	vertical

Connection 2

Design 2	PCB terminal blocks (double-row)
Pole number 2	10
Connection type	Field
Connection technology	CAGE CLAMP®
WAGO connector 2	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches



Physical data		
Width		38 mm / 1.496 inches
Height		85 mm / 3.346 inches
Depth from upper-edge of DIN-rail		36 mm / 1.417 inches

Mechanical data		
Mounting type		DIN-35 rail
Housing design		Mounting carrier

Material data		
Contact material (connector)		Au over Ni
Fire load		0.89 MJ
Weight		42.5 g

Environmental requirements		
Ambient temperature (operation)		-20 ... +55 °C
Ambient temperature (storage)		-40 ... +70 °C
Relative humidity		≤ 85 % (non-condensing)

Standards and specifications		
Standards/specifications		EN 61010-2-201

Commercial data		
Product Group		6 (INTERFACE ELECTRONIC)
eCl@ss 10.0		27-14-11-52
eCl@ss 9.0		27-14-11-52
ETIM 9.0		EC002780
ETIM 8.0		EC002780
PU (SPU)		10 (1) pcs
Packaging type		Box
Country of origin		DE
GTIN		4045454353452
Customs tariff number		85366990990

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03084



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-501

↓

Documentation

Bid Text

289-501

09.02.2015

doc

25.00 KB

↓

289-501

19.02.2019

xml

3.26 KB

↓

Instruction Leaflet

pdf

1246.19 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models 289-501

↓

CAE data

EPLAN Data Portal 289-501

↓

WSCAD Universe 289-501

↓

ZUKEN Portal 289-501

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



[Item No.: 709-196](#)
Marking strips; for laser printer; translucent



[Item No.: 709-177](#)
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



[Item No.: 709-178](#)
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.2 Tool


1.1.2.1 Operating tool




[Item No.: 210-720](#)
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination




Conductor termination – screwdriver actuation parallel to conductor entry




Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.