



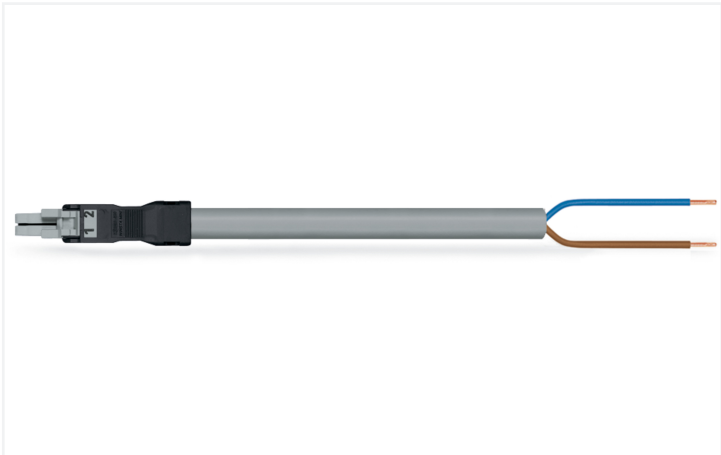

Color: ■ gray

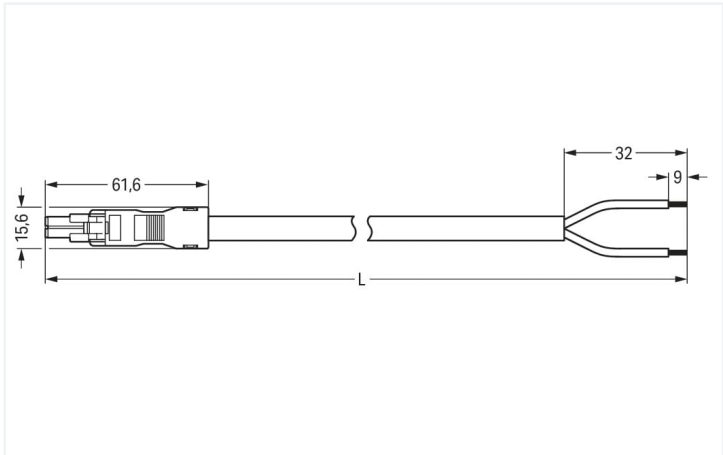

Dimensions in mm

Cable assembly WINSTA® MINI with protection against mismating

For signal and power transmission: The WINSTA® MINI cable assembly with protection against mismating. WAGO pluggable installation connectors are used when specifications repeat or are distributed on a defined pattern, for example for installing grid lighting or flush-mount lighting. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector is protected against ingress by solid granular objects with a diameter of less than 1 mm in accordance with protection type IP40. Solutions like the WINSTA® MINI pluggable installation connectors with B coding are appropriate for process control, such as for lighting or within data networks. Especially where space is tight, our smallest pluggable connection system, WINSTA® MINI, consistently displays its advantages. It is very compact, and, with Push-in CAGE CLAMP® spring pressure connection technology, it also can be installed quickly, since the installation is low-maintenance and can be performed without screw connections. According to the European CPR, the fire class of the cables used in construction is critical for building safety, too. For houses with medium-level safety requirements, cable assemblies with fire class E are suitable.

Fast, error-free assembly thanks to cable assemblies from WAGO

The cable is pre-assembled with a socket and a free end. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Choose quality and durability – with protection against mismating from WAGO makes the electrical installation of electrical components visibly easier.

- protection against mismating eliminates errors
- compact design for conductors with a cross-section up to 1.5 mm²
- for automation controllers
- ready for immediate use
- convenient installation and commissioning

| Notes     |                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note      | Cables with a different fire class can be found in the eShop.                                                                                                                       |
| Variants: | Other pole markings<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 250 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 4 kV           | -   | -  |                                                 |  |
| Rated current        |  | 16 A           | -   | -  |                                                 |  |



| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 2                         | Connection 1                    |                    |
| Conductor preparation      | ultrasonically tip-bonded | Strip length                    | 9 mm / 0.35 inches |
|                            |                           | Pole number                     | 2                  |
|                            |                           | Wire cross-section              | 1.5 mm²            |
|                            |                           | Strip length (outer insulation) | 32 mm              |
|                            |                           | Connection type                 | Socket - free end  |

| Physical data |  |                        |  |
|---------------|--|------------------------|--|
| Pin spacing   |  | 4.4 mm / 0.173 inches  |  |
| Width         |  | 15.6 mm / 0.614 inches |  |
| Height        |  | 13.2 mm / 0.52 inches  |  |
| Total length  |  | 5 m                    |  |

| Mechanical data                         |  |                                                               |  |
|-----------------------------------------|--|---------------------------------------------------------------|--|
| Use                                     |  | Control technology                                            |  |
| Coding                                  |  | B                                                             |  |
| Variable coding                         |  | No                                                            |  |
| Marking                                 |  | 1 2                                                           |  |
| Potential marking                       |  | 1 2                                                           |  |
| Mating force of a plug-in connection    |  | approx. 20 ... 70 N (depending on pole number)                |  |
| Retention force of a plug-in connection |  | when locked: > 80N                                            |  |
| Unmating force of a plug-in connection  |  | when unlocked: approx. 20 ... 70 N (depending on pole number) |  |
| Number of mating cycles                 |  | 200, without resistive load                                   |  |
| Connection type                         |  | Socket - free end                                             |  |
| Type of pre-assembled cable             |  | Connecting cable                                              |  |
| Cable type                              |  | Control line 2x1.5                                            |  |
| Protection type                         |  | IP40                                                          |  |

| Plug-in connection            |  |                                                                                                                                                                                                                                                                                                                  |  |
|-------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Mismating protection          |  | Yes                                                                                                                                                                                                                                                                                                              |  |
| Note on mismating protection  |  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |  |
| Locking lever                 |  | Can be retrofitted                                                                                                                                                                                                                                                                                               |  |
| Locking of plug-in connection |  | Locking lever                                                                                                                                                                                                                                                                                                    |  |
| Note on locking system        |  | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |  |

| Material data                      |  |                                                                          |  |
|------------------------------------|--|--------------------------------------------------------------------------|--|
| Note (material data)               |  | <a href="#">Information on material specifications can be found here</a> |  |
| Color                              |  | gray                                                                     |  |
| Insulation material (main housing) |  | Polyamide (PA66)                                                         |  |
| Fire class per EN 50575            |  | E <sub>ca</sub>                                                          |  |
| Contact material                   |  | Copper or copper alloy; surface-treated                                  |  |
| Contact Plating                    |  | Tin                                                                      |  |
| Fire load                          |  | 0.172 MJ                                                                 |  |
| Connector color                    |  | gray                                                                     |  |
| Strain relief color                |  | black                                                                    |  |



| Material data                    |            |
|----------------------------------|------------|
| Sheathed cable color             | gray       |
| Printing color of sheathed cable | black      |
| Halogen-free                     | No         |
| Silicon-free                     | Yes        |
| Sheath material                  | PVC        |
| Rubber cable                     | No         |
| Weight                           | 329.6 g    |
| Copper weight of the pipe        | 0.029 kg/m |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | PL            |
| GTIN                  | 4050821675457 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

Downloads

| Environmental Product Compliance                     |  |
|------------------------------------------------------|--|
| Compliance Search                                    |  |
| Environmental Product Compliance<br>891-8992/106-503 |  |

Documentation

| Bid Text         |            |                 |  |
|------------------|------------|-----------------|--|
| 891-8992/106-503 | 19.02.2019 | xml<br>3.02 KB  |  |
| 891-8992/106-503 | 02.12.2014 | doc<br>25.00 KB |  |

CAD/CAE-Data

CAE data

EPLAN Data Portal  
891-8992/106-503

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)  
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)  
Locking lever; for manual operation; black



[Item No.: 890-121](#)  
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2001](#)  
Protective cap; Type1; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 890-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black



[Item No.: 890-311](#)  
Mounting carrier; 2- to 5-pole; for flying leads; white