



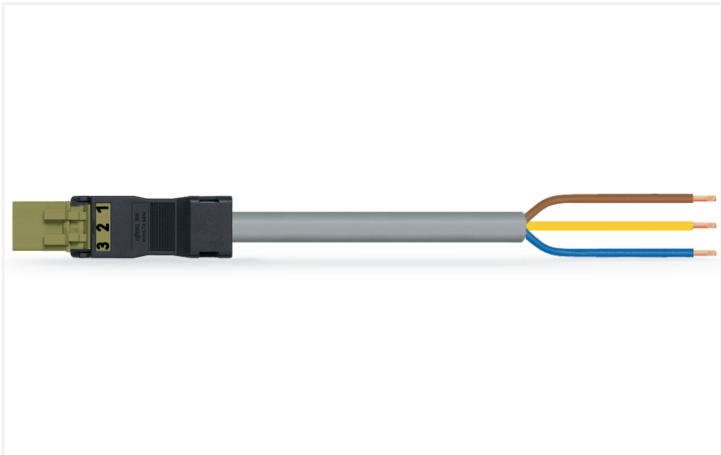

Color: ■ light green

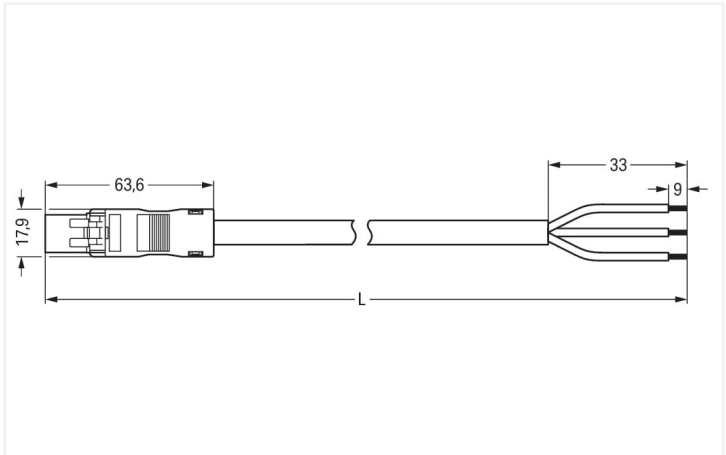

Dimensions in mm

Cable assembly WINSTA® MINI 3-pole

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MINI cable assembly B coding. The pluggable installation connectors with spring pressure connection technology function without screw connections. They allow flexible, error-free installation in a large number of applications. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. Pluggable installation connectors with B coding from the WINSTA® MINI line are available in pink, light green, or gray, allowing you to distinguish different circuits, for example for pumps, lighting, or sun blinds. Customer-specific pole marking is possible as well. Thanks to its particularly small dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is specifically suitable in very tight spaces, i.e., for connections when very little room is available. Building safety must be ensured at all times, even after the electrical installation stage. The mandatory safety requirements in connection with EU CPR are fully satisfied by this product through fire class E.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable assembly is equipped with a plug and a free end. WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It allows fast, secure and, above all, error-free installation of components and cables. Choose quality and durability – with fire class E from WAGO makes the installation of electrical components substantially easier.

- pluggable installation connectors with protection against mismating
- consistent IP40 protection
- for automation controllers
- custom-engineered solutions
- quick replacement of defective units during ongoing operation

| Notes     |                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note      | Cables with a different fire class can be found in the eShop.                                                                                                                       |
| Variants: | Other pole markings<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |

| Electrical data      |  |                |     |    |
|----------------------|--|----------------|-----|----|
| Ratings per          |  | IEC/EN 60664-1 |     |    |
| Overvoltage category |  | III            | III | II |
| Pollution degree     |  | 3              | 2   | 2  |
| Nominal voltage      |  | 250 V          | -   | -  |
| Rated surge voltage  |  | 4 kV           | -   | -  |
| Rated current        |  | 16 A           | -   | -  |

| Ratings per IEC/EN – Notes |                      |
|----------------------------|----------------------|
| Rated current (note)       | 13 A for 3-pole load |



| General information        |                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------|
| Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/<br>socket |

| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 3                         | <b>Connection 1</b>             |                    |
| Conductor preparation      | ultrasonically tip-bonded | Strip length                    | 9 mm / 0.35 inches |
|                            |                           | Pole number                     | 3                  |
|                            |                           | Wire cross-section              | 1.5 mm²            |
|                            |                           | Strip length (outer insulation) | 33 mm              |
|                            |                           | Connection type                 | Plug - free end    |

| Physical data |                        |
|---------------|------------------------|
| Pin spacing   | 4.4 mm / 0.173 inches  |
| Width         | 17.9 mm / 0.705 inches |
| Height        | 14 mm / 0.551 inches   |
| Total length  | 6 m                    |

| Mechanical data                         |                                                               |
|-----------------------------------------|---------------------------------------------------------------|
| Use                                     | Control technology                                            |
| Coding                                  | B                                                             |
| Variable coding                         | No                                                            |
| Marking                                 | 1 2 3                                                         |
| Potential marking                       | 1 2 3                                                         |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                |
| Retention force of a plug-in connection | when locked: > 80N                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number) |
| Number of mating cycles                 | 200, without resistive load                                   |
| Connection type                         | Plug - free end                                               |
| Type of pre-assembled cable             | Connecting cable                                              |
| Cable type                              | H05VV-F 3x1.5                                                 |
| Protection type                         | IP20; IP40 when mated                                         |

| Plug-in connection            |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                      |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | light green                                                              |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Fire class per EN 50575            | E <sub>ca</sub>                                                          |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 0.275 MJ                                                                 |
| Connector color                    | light green                                                              |
| Strain relief color                | black                                                                    |
| Sheathed cable color               | gray                                                                     |
| Printing color of sheathed cable   | black                                                                    |
| Halogen-free                       | No                                                                       |
| Silicon-free                       | Yes                                                                      |
| Sheath material                    | PVC                                                                      |
| Rubber cable                       | No                                                                       |
| Weight                             | 600.4 g                                                                  |
| Copper weight of the pipe          | 0.043 kg/m                                                               |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | PL            |
| GTIN                  | 4055143515306 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                        |
|----------------------------------|------------------------|
| RoHS Compliance Status           | Compliant,No Exemption |

| Downloads                                            |  |
|------------------------------------------------------|--|
| Environmental Product Compliance                     |  |
| Compliance Search                                    |  |
| Environmental Product Compliance<br>891-8993/206-605 |  |

Documentation

| Bid Text         |            |                 |                                                                                   |
|------------------|------------|-----------------|-----------------------------------------------------------------------------------|
| 891-8993/206-605 | 19.02.2019 | xml<br>3.03 KB  |  |
| 891-8993/206-605 | 02.12.2014 | doc<br>25.50 KB |  |

CAD/CAE-Data

| CAE data                              |                                                                                   |
|---------------------------------------|-----------------------------------------------------------------------------------|
| EPLAN Data Portal<br>891-8993/206-605 |  |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 890-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 890-131](#)  
Locking lever; for flying leads; for tool operation; white



[Item No.: 890-101](#)  
Locking lever; for manual operation; black



[Item No.: 890-121](#)  
Locking lever; for manual operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 897-2001](#)  
Protective cap; Type1; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 890-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black



[Item No.: 890-311](#)  
Mounting carrier; 2- to 5-pole; for flying leads; white