




Color: ■ red

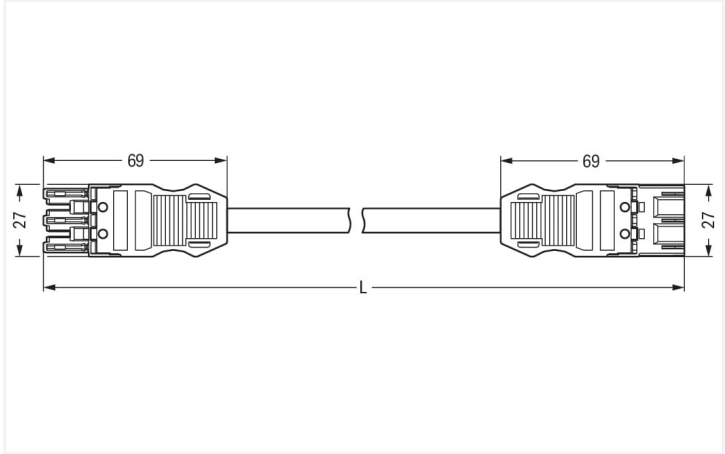

Dimensions in mm

Cable assembly WINSTA® MIDI P coding

The WINSTA® MIDI cable assembly P coding provides the foundation for assembly of solid and fine-stranded conductors. WAGO pluggable installation connectors are useful when requirements repeat or are distributed on a specified pattern, for example for installing grid lighting or flush-mount lighting. The coding options reduce installation errors, allowing fast, secure wiring of all components. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). WINSTA® MIDI pluggable installation connectors with P coding are utilised for implementing uninterruptible power supplies. This pluggable installation connector can be employed for a voltage load of up to 20 A. Thus, it can also be used for high power loads. The WINSTA® MI-DI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Due to the integrated test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and expense. This product meets all the mandatory safety requirements of fire class E; thus it can be used in areas where fire safety is relevant.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable assembly is equipped with a socket and a plug. The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, even more reliable, and error-free. Use of this pre-assembled system decreases assembly times and errors during installation at the construction site. Choose quality and durability – with marking from WAGO makes the electrical installation of electrical components noticeably easier.

- pluggable installation connectors with protection against mismatching
- pre-assembled versions
- with P coding for fault-free power supply
- ready to install and use immediately
- convenient installation and commissioning

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category		III	III	II	approx. 1 mΩ of contact resistance	
Pollution degree		3	2	2	approx. 0.25 mΩ contact transition plug/ socket	
Nominal voltage	250 V	-	-	-		
Rated surge voltage	4 kV	-	-	-		
Rated current	20 A	-	-	-		



Connection data			
Total number of potentials	3	Connection 1	
PE function	Preceding PE contact		
		Pole number	3
		Wire cross-section	2.5 mm²
		Connection type	Socket - Plug
Physical data			
Pin spacing	10 mm / 0.394 inches		
Width	27 mm / 1.063 inches		
Height	12.9 mm / 0.508 inches		
Total length	3 m		
Mechanical data			
Use	EDV (UPS)		
Coding	P		
Variable coding	No		
Marking	L ⊕ N		
Potential marking	L ⊕ N		
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)		
Retention force of a plug-in connection	when locked: > 80N		
Unmating force of a plug-in connection	when unlocked: approx. 20 ... 70 N (depending on pole number)		
Number of mating cycles	200, without resistive load		
Connection type	Socket - Plug		
Type of pre-assembled cable	Interconnecting cable		
Cable type	H05VV-F 3G2.5		
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)		
Plug-in connection			
Mismating protection	Yes		
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole		
Locking lever	Can be retrofitted		
Locking of plug-in connection	Locking lever		
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).		
Material data			
Note (material data)	Information on material specifications can be found here		
Color	red		
Insulation material (main housing)	Polyamide (PA66)		
Fire class per EN 50575	E _{ca}		
Contact material	Copper or copper alloy; surface-treated		
Contact Plating	Tin		
Fire load	89.428 MJ		
Connector color	red		
Strain relief color	white		
Printing color of strain relief	black		
Sheathed cable color	white		

Material data		
Printing color of sheathed cable		black
Halogen-free		No
Silicon-free		Yes
Sheath material		PVC
Rubber cable		No
Weight		495.8 g
Copper weight of the pipe		0.072 kg/m

Environmental requirements		
Processing temperature		-5 ... +40 °C
Continuous operating temperature		-35 ... +85 °C
Note on continuous operating temperature		Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data		
eCl@ss 10.0		27-44-06-04
eCl@ss 9.0		27-44-06-04
ETIM 9.0		EC002587
ETIM 8.0		EC002587
PU (SPU)		1 pcs
Packaging type		unpacked
Country of origin		DE
GTIN		4045454523299
Customs tariff number		85444290900

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates																				
General approvals		Declarations of conformity and manufacturer's declarations																		
 <table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>CCA DEKRA Certification B.V.</td><td>EN 61535</td><td>NTR NL-7972</td></tr><tr><td>KEMA/KEUR DEKRA Certification B.V.</td><td>EN 61535</td><td>71-123834</td></tr></table>		Approval	Standard	Certificate Name	CCA DEKRA Certification B.V.	EN 61535	NTR NL-7972	KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123834	<table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr></table>	Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Approval	Standard	Certificate Name																		
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7972																		
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123834																		
Approval	Standard	Certificate Name																		
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-																		
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-																		



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance			↓
771-9973/007-302			

Documentation

Bid Text			
771-9973/007-302	19.02.2019	xml 2.90 KB	↓
771-9973/007-302	04.12.2014	doc 24.50 KB	↓

CAD/CAE-Data

CAE data	
WSCAD Universe	↓
771-9973/007-302	

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



Item No.: 770-101
Locking lever; for flying leads; for manual operation; black



Item No.: 770-121
Locking lever; for flying leads; for manual operation; white



Item No.: 770-111
Locking lever; for flying leads; for tool operation; black



Item No.: 770-131
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



Item No.: 770-201
Lockout cap; 12-pole, separable; for sockets; Plastic; black



Item No.: 770-221
Lockout cap; 12-pole, separable; for sockets; Plastic; white



Item No.: 770-360
Lockout cap; for plugs; 5-pole; separable; yellow



Item No.: 897-2003
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



Item No.: 770-310
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



Item No.: 770-450/000-006
Marker card; Plastic; blue



Item No.: 770-450/000-001
Marker card; Plastic; green



Item No.: 770-450/000-012
Marker card; Plastic; orange



Item No.: 770-450/000-005
Marker card; Plastic; red



Item No.: 770-450
Marker card; Plastic; white



Item No.: 770-450/000-002
Marker card; Plastic; yellow

1.2.3.2 Marking strip



Item No.: 210-334
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white