



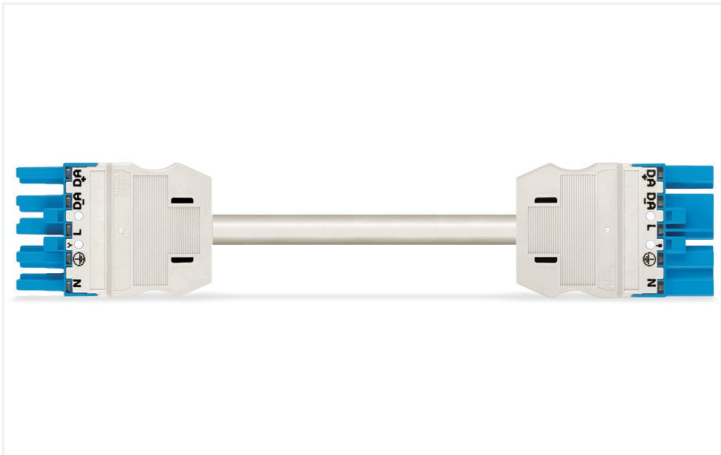

Color: ■ blue

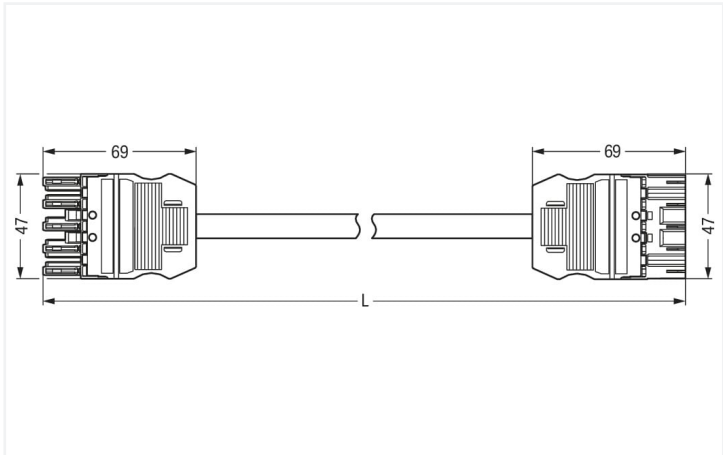

Dimensions in mm

Cable assembly WINSTA® MIDI with protection against mismating

The WINSTA® MIDI cable assembly with protection against mismating supports rapid, correct installation. WAGO pluggable installation connectors can be used when criteria repeat or are distributed on a specific grid, for example for installing grid lighting or flush-mount lighting. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with live elements. WINSTA® MIDI pluggable installation connectors with I coding in blue are above all suitable for lighting management, for example for the dimming of DALI lights. Important parameters in the selection of a pluggable installation connector are the rated current and voltage: They tell us about the product's domains of use. This product has a current rating of 20 A – as a result it is suitable for high power loads. The WINSTA® MIDI product line offers flexibility for the installation. Through its Push-in CAGE CLAMP® spring pressure connection technology, it guarantees error-free, time-saving installation and offers customization for meeting all installation requirements. Of course, the safety of buildings must always be ensured, even after the electrical installation has been performed. The mandatory safety requirements in connection with EU CPR are met by this product through fire class E. Eliminating halogens as an additive in the manufacture of this cable assembly noticeably increases fire safety and minimises environmental contamination.

Pluggable connections instead of screw connections – cable assemblies from WAGO

A socket and a plug are provided. WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It offers fast, secure and, above all, error-free installation of components and cables. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection type IP20 from WAGO.

- protection against mismating eliminates errors
- pre-assembled versions
- with I coding for controlling light (DALI standard)
- flexible installation to save space
- convenient installation and commissioning

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 400 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 6 kV           | -   | -  |                                                 |  |
| Rated current        |  | 20 A           | -   | -  |                                                 |  |



Connection data

|                            |                      |                         |                  |
|----------------------------|----------------------|-------------------------|------------------|
| Total number of potentials | 5                    | Connection 1            |                  |
| PE function                | Preceding PE contact | Pole number             | 5                |
|                            |                      | Sheathed cable diameter | 11.2 ... 13.9 mm |
|                            |                      | Wire cross-section      | 2.5 mm²          |
|                            |                      | Connection type         | Socket - Plug    |

Physical data

|              |                         |
|--------------|-------------------------|
| Pin spacing  | 10 mm / 0.394 inches    |
| Width        | 47 mm / 1.85 inches     |
| Height       | 15.38 mm / 0.606 inches |
| Total length | 4 m                     |

Mechanical data

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Use                                     | DALI, Lighting Management                                                                                     |
| Coding                                  | I                                                                                                             |
| Variable coding                         | No                                                                                                            |
| Marking                                 | N L DA- DA+                                                                                                   |
| Potential marking                       | N L DA- DA+                                                                                                   |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Socket - Plug                                                                                                 |
| Type of pre-assembled cable             | Interconnecting cable                                                                                         |
| Cable type                              | H05Z1Z1-F 5G2.5                                                                                               |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All <i>W/INSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                       |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

Material data

|                                    |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | blue                                                                     |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Flammability class per UL94        | V0                                                                       |
| Fire class per EN 50575            | E <sub>ca</sub>                                                          |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 120.386 MJ                                                               |
| Connector color                    | blue                                                                     |
| Strain relief color                | white                                                                    |



| Material data                    |  |              |
|----------------------------------|--|--------------|
| Printing color of strain relief  |  | black        |
| Sheathed cable color             |  | white        |
| Printing color of sheathed cable |  | black        |
| Halogen-free                     |  | Yes          |
| Silicon-free                     |  | Yes          |
| Sheath material                  |  | Halogen-free |
| Rubber cable                     |  | No           |
| Weight                           |  | 967.9 g      |
| Copper weight of the pipe        |  | 0.12 kg/m    |

| Environmental requirements               |  |                                                                                                       |
|------------------------------------------|--|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   |  | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         |  | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature |  | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |  |               |
|-----------------------|--|---------------|
| eCl@ss 10.0           |  | 27-44-06-04   |
| eCl@ss 9.0            |  | 27-44-06-04   |
| ETIM 8.0              |  | EC002587      |
| ETIM 7.0              |  | EC002587      |
| PU (SPU)              |  | 1 pcs         |
| Packaging type        |  | unpacked      |
| Country of origin     |  | DE            |
| GTIN                  |  | 4050821149422 |
| Customs tariff number |  | 85444290900   |

| Environmental Product Compliance |  |                        |
|----------------------------------|--|------------------------|
| RoHS Compliance Status           |  | Compliant,No Exemption |

| Approvals / Certificates                                |          |                                                            |
|---------------------------------------------------------|----------|------------------------------------------------------------|
| General approvals                                       |          | Declarations of conformity and manufacturer's declarations |
| <div><div>CCA</div><div>KEMA<br/>KEUR</div></div>       |          |                                                            |
| Approval                                                | Standard | Certificate Name                                           |
| CCA<br>DEKRA Certification B.V.                         | EN 61535 | NTR NL-7972                                                |
| KEMA/KEUR<br>DEKRA Certification B.V.                   | EN 61535 | 71-123834                                                  |
| Approval                                                | Standard | Certificate Name                                           |
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance  
771-9985/017-402

↓

Documentation

| Bid Text         |            |                 |   |
|------------------|------------|-----------------|---|
| 771-9985/017-402 | 19.02.2019 | xml<br>2.98 KB  | ↓ |
| 771-9985/017-402 | 10.12.2014 | doc<br>25.50 KB | ↓ |

CAD/CAE-Data

| CAD data                         | CAE data                           |
|----------------------------------|------------------------------------|
| 2D/3D Models<br>771-9985/017-402 | WSCAD Universe<br>771-9985/017-402 |
| ↓                                | ↓                                  |
|                                  | ZUKEN Portal<br>771-9985/017-402   |
|                                  | ↓                                  |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 770-101](#)  
Locking lever; for flying leads; for manual operation; black



[Item No.: 770-121](#)  
Locking lever; for flying leads; for manual operation; white



[Item No.: 770-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 770-131](#)  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-201](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



[Item No.: 770-221](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



[Item No.: 770-360](#)  
Lockout cap; for plugs; 5-pole; separable; yellow



[Item No.: 897-2005](#)  
Protective cap; Type4; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white