

PRODUCT DATASHEET

BLKH RD Eyelid 250 BK

BULKHEAD ROUND EYELID | Attachable half-visor ring (IK10)





Product features


- Eyelid ring for BULKHEAD ROUND
- Available for 250 mm and 300 mm Bulkhead version
- Available in black and white color
- Impact resistance: IK10

TECHNICAL DATA

Photometrical data

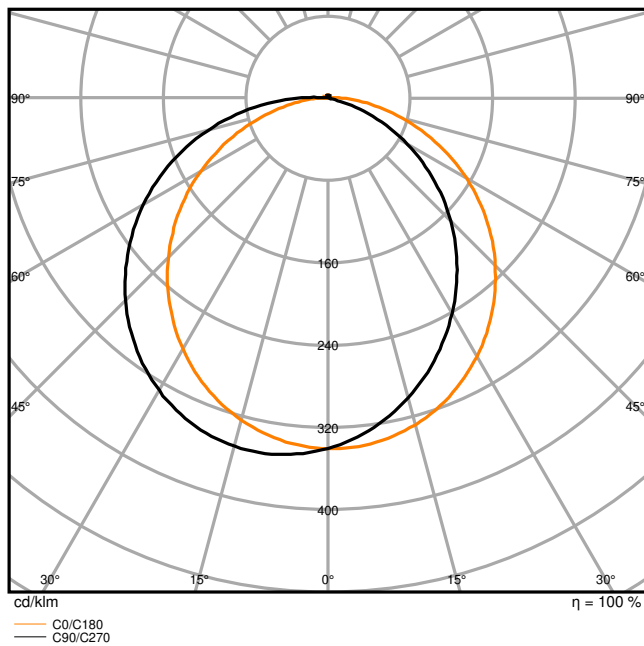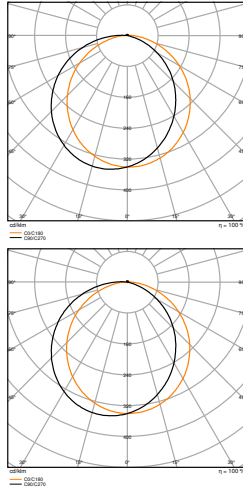


BLKH RD Eyelid 250 BK 830

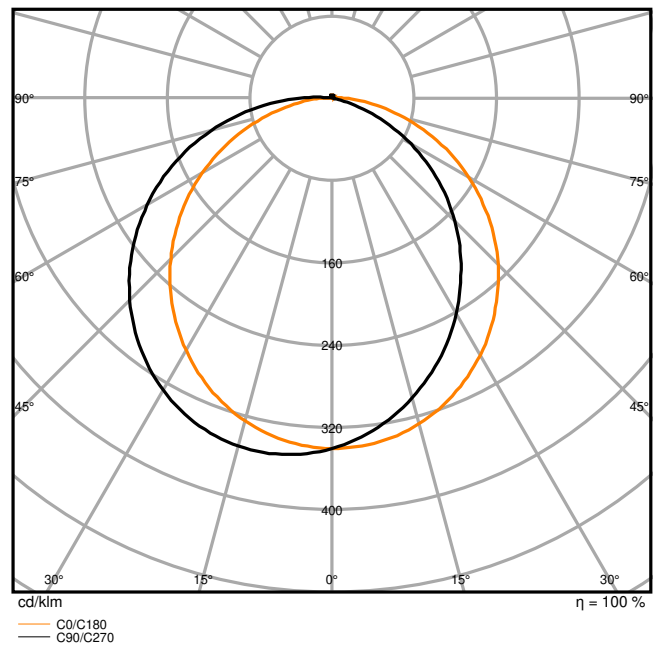

BLKH RD Eyelid 250 BK 840

Dimensions & Weight

Diameter	262.00 mm
Height	74.0 mm
Product weight	176.00 g



BLKH RD EYELID 250

Materials & Colors

Product color	Black
Body material	Polycarbonate (PC)

Application & Mounting

Protection class IK (shock resistance)	IK10
Mounting type	Surface

Certificates & Standards

Standards	CE / CB / UKCA / EAC / ENEC
-----------	-----------------------------

EQUIPMENT / ACCESSORIES

- Anti-theft screw included

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	BLKH RD GEN2
	Legal information	Legal Insert BLKH RD
	Declarations of conformity	BLKH RD/LISOEV
	Declarations of conformity UKCA	BLKH RD/LISOEV
Photometric and lighting design files		Document name
	IES file (IES)	BLKH RD Eyelid 250 BK 830

Photometric and lighting design files		Document name
	IES file (IES)	BLKH RD Eyelid 250 BK 840
	LDT file (Eulumdat)	BLKH RD Eyelid 250 BK 830
	LDT file (Eulumdat)	BLKH RD Eyelid 250 BK 840
	Light distribution curve type polar	BLKH RD Eyelid 250 BK 830
	Light distribution curve type polar	BLKH RD Eyelid 250 BK 840
Tender texts		Document name
	Tender documents	BULKHEAD ROUND EYELID Eyelid 250 BK-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854286759	Folding box 1	77 mm x 266 mm x 266 mm	279.00 g	5.45 dm³
4099854286766	Shipping box 8	545 mm x 280 mm x 335 mm	2782.00 g	51.12 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.