


# PRODUCT DATASHEET

## DR DS-P- 10/220-240/350 BLKH

BULKHEAD ROUND DRIVER | Exchangeable driver

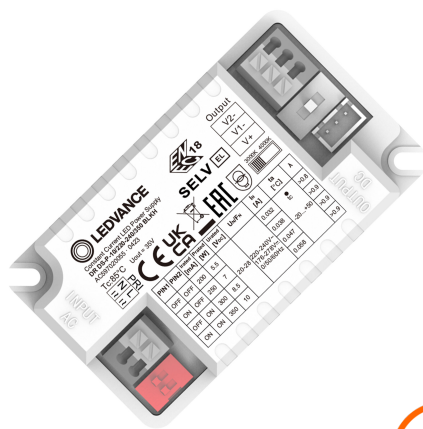

### Areas of application

- Suitable for BULKHEAD ROUND

### Product benefits

- Suitable for 3000 K and 4000 K luminaires and Multi Lumen function

### Product features

- Type of protection: IP20
- UV-stabilized polycarbonate (PC) housing, PC-diffuser




TECHNICAL DATA

Electrical data

|                           |              |
|---------------------------|--------------|
| Nominal wattage           | 10.00 W      |
| Nominal voltage           | 220...240 V  |
| Mains frequency           | 0/50/60 Hz   |
| Nominal current           | 58 mA        |
| Inrush current            | 3.38 A       |
| Power factor $\lambda$    | > 0.90       |
| Total harmonic distortion | < 15 %       |
| Protection class          | II           |
| Dimming interface         | Not dimmable |

Dimensions & Weight

|                |          |
|----------------|----------|
| Length         | 79.00 mm |
| Width          | 45.00 mm |
| Height         | 25.00 mm |
| Product weight | 48.00 g  |



DRIVER DS-P

Materials & Colors

|                 |         |
|-----------------|---------|
| Product color   | White   |
| Body material   | Plastic |
| Mercury content | 0.0 mg  |

Application & Mounting

|                              |              |
|------------------------------|--------------|
| Ambient temperature range    | -20...+50 °C |
| Temperature range at storage | -20...+80 °C |

|                    |      |
|--------------------|------|
| Type of protection | IP20 |
| Dimmable           | No   |

### Lifespan

|                            |        |
|----------------------------|--------|
| Number of switching cycles | 100000 |
|----------------------------|--------|

### Control gear

|                        |                                   |
|------------------------|-----------------------------------|
| Nominal output current | 350 mA / 300 mA / 250 mA / 200 mA |
| ECG lifetime           | 70000 h                           |

### Certificates & Standards

|           |                             |
|-----------|-----------------------------|
| Standards | CE / CB / UKCA / EAC / ENEC |
|-----------|-----------------------------|

### Additional product data

|                |          |
|----------------|----------|
| Added function | EVERLOOP |
|----------------|----------|

### DOWNLOAD DATA

| Documents and certificates                                                         |                                        | Document name                              |
|------------------------------------------------------------------------------------|----------------------------------------|--------------------------------------------|
|  | User instruction / safety instructions | DR DS P                                    |
|  | Legal information                      | Informationstext 18 Abs 4 ElektroG         |
|  | Legal information                      | Light Source Insert G11202326              |
|  | Legal information                      | Safety Insert G11218810                    |
|  | Declarations of conformity             | DR DS-P                                    |
|  | Declarations of conformity UKCA        | DR DS-P                                    |
| Tender texts                                                                       |                                        | Document name                              |
|  | Tender documents                       | BULKHEAD ROUND DRIVER 10220-240350 BLKH-EN |

### LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4099854286834 | Folding box<br>1             | 30 mm x 55 mm x 85 mm                | 56.00 g      | 0.14 dm <sup>3</sup>  |
| 4099854286841 | Shipping box<br>160          | 460 mm x 320 mm x 185 mm             | 9598.00 g    | 27.23 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.