


GIOTTO 335 4000K RECESSED 1-10V EMERGENCY
3034818

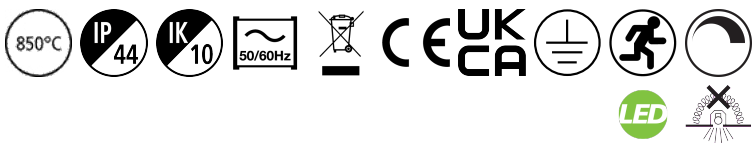

Features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2350lm, 21.6W, 109lm/W, 4000K, CRI 80, 1-10V dimmable, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.


Product Overview

Product name	GIOTTO 335 4000K RECESSED 1-10V EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	109
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Glare control	< 26
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	155


GIOTTO 335 4000K RECESSED 1-10V EMERGENCY 3034818

Luminous flux (emergency) (lm)	155
Total power consumption (W)	21.6
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971348184
Warranty	5 years
Dimming method	1-10V (Analogue)
Colour Code	840


Photometry

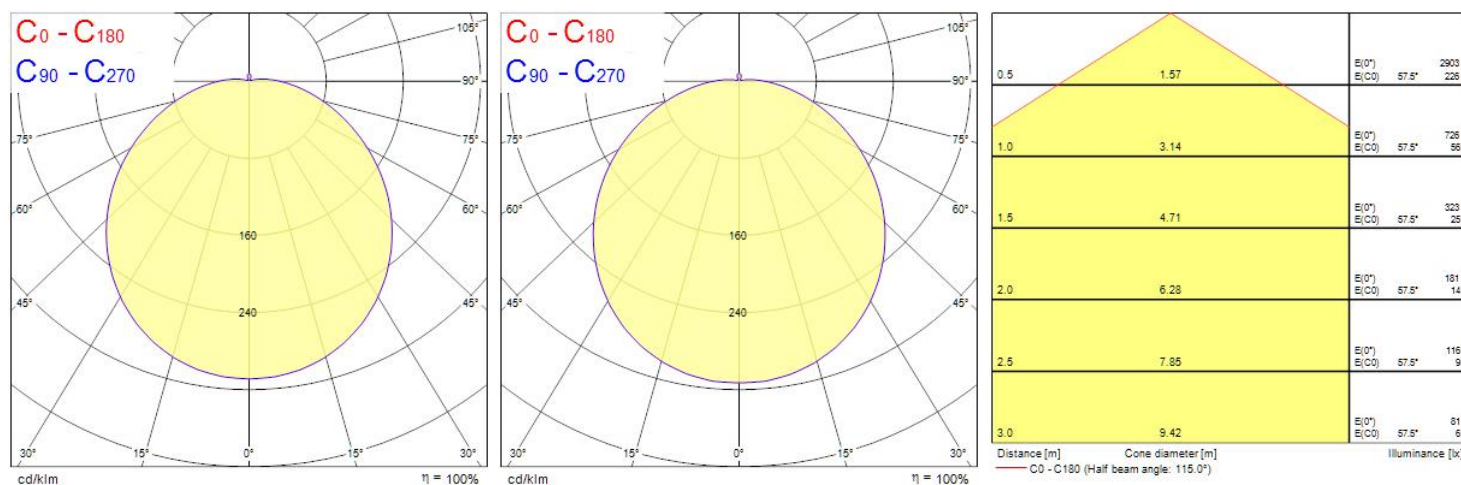

GIOTTO 335 4000K RECESSED 1-10V EMERGENCY
3034818

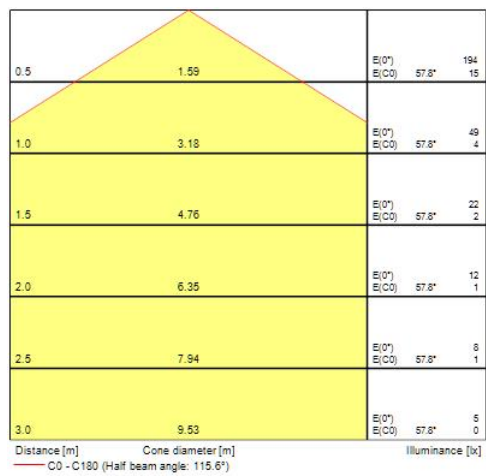

Technical drawings

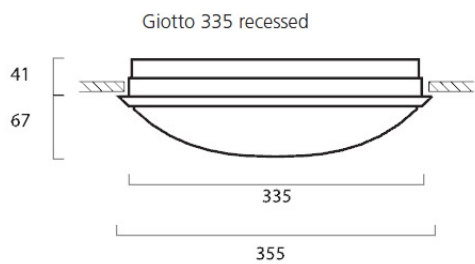

Data table

GENERAL DATA

Product name	GIOTTO 335 4000K RECESSED 1-10V EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Logistics & Industry

**GIOTTO 335 4000K RECESSED 1-10V EMERGENCY
3034818**

Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	109
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 26
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80
Luminous flux (emergency) (lm)	155
Luminous flux (emergency) (lm)	155
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	21.6
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated

GIOTTO 335 4000K RECESSED 1-10V EMERGENCY 3034818

Dimmable	Yes
Dimming method	1-10V (Analogue)
Drive current (mA)	600
Inrush Current (A)	5
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	52
Max. products per 16A C Breaker	85
Max. products per 20A C Breaker	104
Max. products per 10A B Breaker	31
Max. products per 16A B Breaker	50
Max. products per 20A B Breaker	62
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B10	120000
Lifespan L80 B50	120000
Lifespan L90 B50	74500

PHYSICAL DATA

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	110
Nominal Product Diameter (mm)	355
Weight (kg)	1.5



GIOTTO 335 4000K RECESSED 1-10V EMERGENCY
3034818

Recessed Depth (mm)	41
---------------------	----

PACKAGING

Product EAN number	8711971348184
Packaging single length / height (cm)	35.7
Packaging single width (cm)	35.7
Packaging single depth (cm)	10.6
DUN14 (inner)	08711971348184
Units per outer package	1
Packaging outer length / height (cm)	35.7
Packaging outer width (cm)	35.7
Packaging outer depth (cm)	10.6

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	1-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No