



Features

• Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 2800lm; 22W; 127lm/W; 4000K; SDCM<3; DALI dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; 3-hour maintained emergency batteries.


Product Overview

Product name	Resisto 1200 HE IP66 DALI 2800LM 840 EM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	127
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	110
Glare control	< 22
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	765
Luminous flux (emergency) (lm)	765

Resisto 1200 HE IP66 DALI 2800LM 840 EM
0010280


Total power consumption (W)	22
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288102801
Warranty	5 years
Dimming method	DALI

Photometry

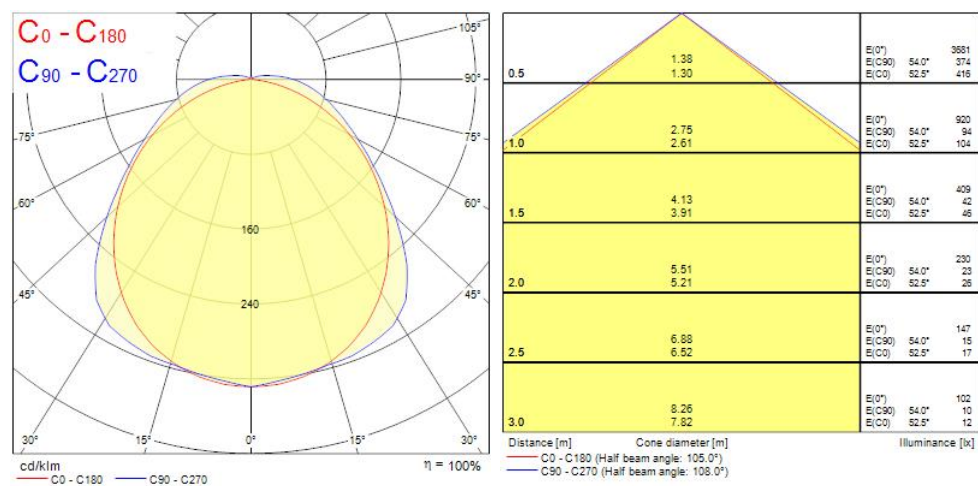

Resisto 1200 HE IP66 DALI 2800LM 840 EM
0010280

Technical drawings

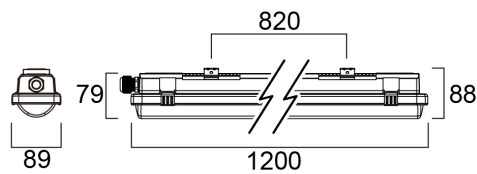

Data table

GENERAL DATA

Product name	Resisto 1200 HE IP66 DALI 2800LM 840 EM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
Operating temperature range (°C)	5°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	127

Resisto 1200 HE IP66 DALI 2800LM 840 EM 0010280

Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Colour Consistency (SDCM)	3
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 22
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	765
Luminous flux (emergency) (lm)	765
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	22
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	350
Inrush Current (A)	20
Inrush Duration (µs)	140
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	40



Resisto 1200 HE IP66 DALI 2800LM 840 EM
0010280

Max. products per 13A C Breaker	56
Max. products per 16A C Breaker	64
Max. products per 20A C Breaker	80
Max. products per 10A B Breaker	21
Max. products per 13A B Breaker	28
Max. products per 16A B Breaker	35
Max. products per 20A B Breaker	44
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	74000
Lifespan L80 B20	69000
Lifespan L80 B10	66000
Lifespan L90 B50	35000
Lifespan L90 B20	33000
Lifespan L90 B10	31000

PHYSICAL DATA

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	2.19

PACKAGING

Product EAN number	5410288102801
--------------------	---------------



Resisto 1200 HE IP66 DALI 2800LM 840 EM
0010280

Packaging single length / height (cm)	120.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	05410288102801
Units per outer package	1
Packaging outer length / height (cm)	120.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No