

START Bollard IP65 1100lm 830/840 Grey
0047974



Features

- Integrated LED bollard, contemporary design on a classic bollard, 1100LM, 19W, 58lm/W, integrated switch allows to choose between warm white (3000K) and neutral white (4000K) colour temperatures, CRI80, IP65, IK10, 90,000hrs L80B10 Lifespan, 1000x168x168mm (HxWxD), 5 step MacAdam ellipse, 7kg, RAL 7016 Anthracite grey colour, Class I safety class, -25 to +50°C operating temperature range, 1000 hrs salt spray test.


Product Overview

Product name	START Bollard IP65 1100lm 830/840 Grey
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Floor standing
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer
ETIM Class	EC000301
E-number FI	4579641
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	58
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	57
Photobiological Risk Group	RG1
Total power consumption (W)	19
Electrical protection	Class I

START Bollard IP65 1100lm 830/840 Grey
0047974

Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL7016
IP rating	IP65
IK rating	IK10
Product EAN number	5410288479743
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	1100

Photometry

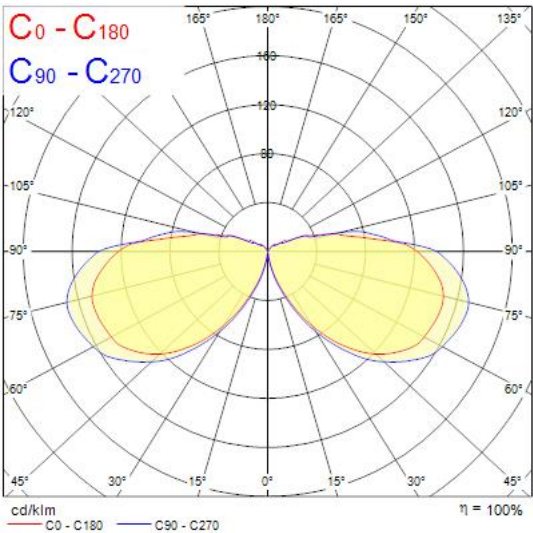

Technical drawings

