

START Downlight 225 IP54 2350lm 830
0030330



Features

• Ceiling recessed LED downlight IP54 (from the front), perfect where limited ceiling void is available with only 65mm product depth and 225mm cutout. Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 23W, 3000K, Driver Current: 630mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP54 from the front, IK07, (HxW) 65x225mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 225 IP54 2350lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278155
Fixture luminous flux (lm)	2350
Luminous flux (lm)	2350
Luminaire efficacy (lm/W)	102
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74

START Downlight 225 IP54 2350lm 830 0030330

Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288303307
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	2275

Photometry

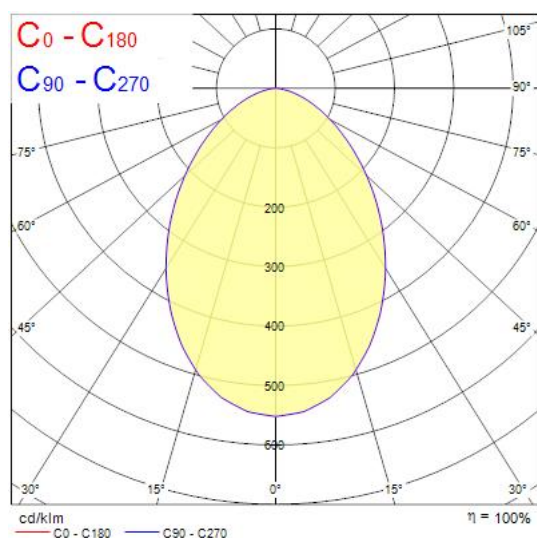

Technical drawings

