

Features

- Insaver is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 24W; 3050lm; 127lm/W; 4000K; UGR <19 with shallow product depth 65mm. Meets TP(a) requirements.


Product Overview

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Product name                      | Insaver UGR19 IP44 225 3050LM 840 |
| Technology                        | LED                               |
| Cap/Base                          | N/A                               |
| Housing                           | Aluminium                         |
| Mount                             | Ceiling recessed mounting         |
| General application               | Hospitality, Office, Retail       |
| ETIM Class                        | EC001744                          |
| E-number FI                       | 4278533                           |
| Fixture luminous flux (lm)        | 3050                              |
| Luminaire efficacy (lm/W)         | 127                               |
| Correlated colour temperature (k) | 4000                              |
| Light colour                      | Neutral White                     |
| CRI (Ra)                          | 80                                |
| Colour Variation Initial (SDCM)   | 3                                 |
| Beam Angle (°)                    | 70                                |
| Glare control                     | < 19                              |
| Photobiological Risk Group        | RG1                               |
| Total power consumption (W)       | 24                                |
| Electrical protection             | Class II                          |
| Control gear type                 | LED driver constant current       |

Insaver UGR19 IP44 225 3050LM 840  
0030507

|                             |                        |
|-----------------------------|------------------------|
| LED Flickering Rate         | Ultra low (5% or less) |
| Housing colour              | RAL9010                |
| IP rating                   | IP44/20                |
| IK rating                   | IK07                   |
| Product EAN number          | 5410288305073          |
| Warranty                    | 5 years                |
| Dimming method              | N/A                    |
| Useful luminous flux (#use) | 3050                   |

Photometry

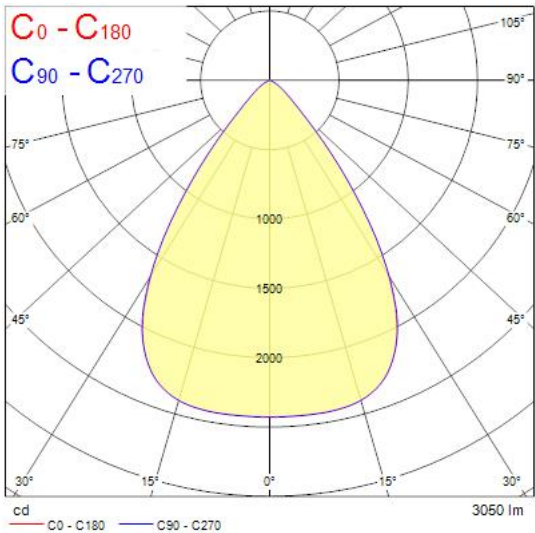

Technical drawings

