

SYLVEO LED 20000LM ROAD ASYMMETRIC 4K DALI
0049147



Features

- Exterior LED floodlight, comes complete with a 1000mm cable and adjustable bracket, aluminium housing, clear glass diffuser, 21542lm, 201W, 107lm/W, 4000K, 5002mA, CRI70, 52°x117° beam angle, DALI dimmable, IP66, IK08, Class I, 50000hrs, (LxWxD) 98x496x392mm


Product Overview

Product name	SYLVEO LED 20000LM ROAD ASYMMETRIC 4K DALI
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579405
E-number SE	7764813
Fixture luminous flux (lm)	21542
Luminaire efficacy (lm/W)	107
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	6
Beam Angle (°)	52 x 117
Glare control	< 18
Photobiological Risk Group	RG1
Total power consumption (W)	202

SYLVEO LED 20000LM ROAD ASYMMETRIC 4K DALI 0049147

Electrical protection	Class I
Control gear type	Electronic ballast
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9006
IP rating	IP66
IK rating	IK08
Product EAN number	5410288491479
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	21542

Photometry

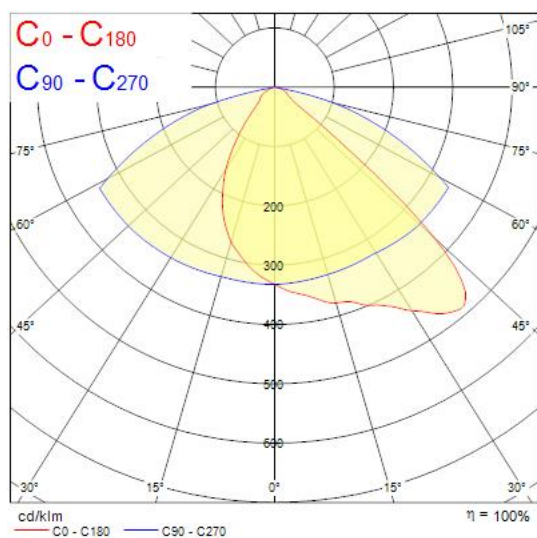

Technical drawings

