

INSET TREND 75 SW IP44 BLK NO-LMP
0084102



Features

- INSET TREND 75 SW IP44 BLK NO-LMP is the recessed housing frame to use with RefLED GU10 spotlight lamp Ø50mm - GU10 spotlight not included. Aluminium body, round bezel ring in black finish, IP44 degree of protection, class II, Suitable for internal environment only.


Product Overview

Product name	INSET TREND 75 SW IP44 BLK NO-LMP
Technology	Accessory
Cap/Base	GU10
Housing	Aluminium
Mount	Ceiling recessed mounting
Light source included	Fixture without Lightsource
Environment	Indoor
General application	Hospitality, Residential & Consumer
ETIM Class	EC001744
E-number FI	4279659
Fixture luminous flux (lm)	1
LOR (%)	Dependent on lamp
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Total power consumption (W)	0.1
Electrical protection	Class II
Control gear type	Not required
Dimmable	No
Housing colour	RAL9004
IP rating	IP44/20
IK rating	IK02

INSET TREND 75 SW IP44 BLK NO-LMP
0084102

Product EAN number	5410288841021
Warranty	3 years
Dimming method	N/A

Technical drawings

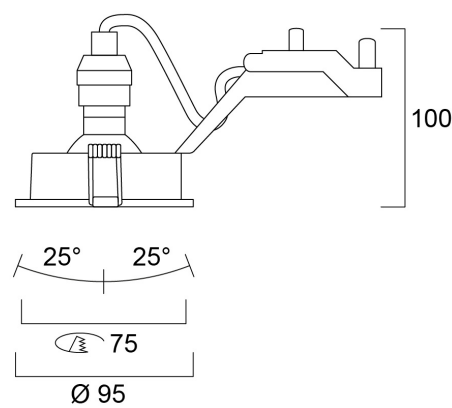

Data table

GENERAL DATA

Product name	INSET TREND 75 SW IP44 BLK NO-LMP
Technology	Accessory
Cap/Base	GU10
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-10°C...+40°C
ETIM Class	EC001744
E-number FI	4279659
Warranty	3 years

OPTICAL DATA

INSET TREND 75 SW IP44 BLK NO-LMP 0084102

Fixture luminous flux (lm)	1
LOR (%)	Dependent on lamp
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Distribution type	Symmetric
Photobiological Risk Group	Not applicable

ELECTRICAL DATA

Light source included	Fixture without Lightsource
Total power consumption (W)	0.1
Current (A)	0.001
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	1
Electrical protection	Class II
Control gear required	No
Control gear type	Not required
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	20
Max. products per 16A C Breaker	30
Connectable conductor cross section - Max (mm ²)	1.5

PHYSICAL DATA

Housing colour	RAL9004
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable



INSET TREND 75 SW IP44 BLK NO-LMP
0084102

Nominal Product Height (mm)	100
Nominal Product Diameter (mm)	95
Built-in diameter (mm)	75
Weight (kg)	0.18
Recessed Depth (mm)	115

PACKAGING

Product EAN number	5410288841021
Packaging single length / height (cm)	13.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	15410288841028
Units per outer package	30
Packaging outer length / height (cm)	52.5
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	28.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No