

GIOTTO 235 4000K SURFACE DALI
3034760



Features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1150lm, 10.1W, 114lm/W, 4000K, CRI 80, DALI, 120,000 hours lumen maintenance (L70:B50). Drive current: 275mA, IP44, IK10, Class I, 220-240V.


Product Overview

Product name	GIOTTO 235 4000K SURFACE DALI
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
E-number FI	4270117
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	114
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	10.1

GIOTTO 235 4000K SURFACE DALI
3034760


Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971347606
Warranty	5 years
Dimming method	DALI
Colour Code	840

Photometry

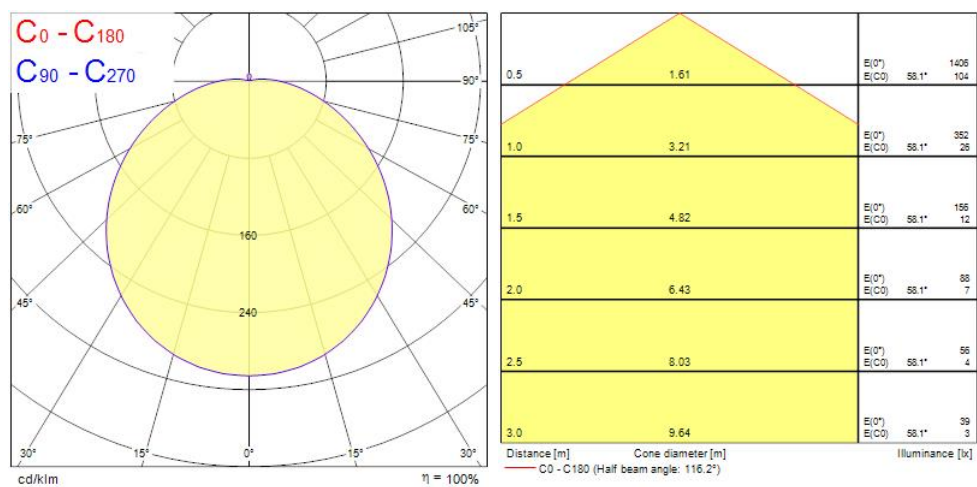

GIOTTO 235 4000K SURFACE DALI
3034760

Technical drawings

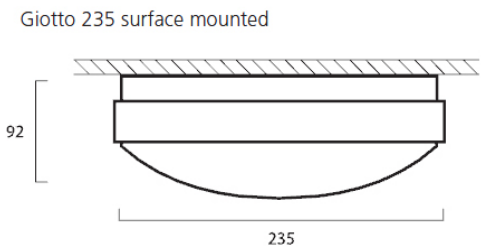

Data table

GENERAL DATA

Product name	GIOTTO 235 4000K SURFACE DALI
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4270117
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	114
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80

GIOTTO 235 4000K SURFACE DALI 3034760

Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80

ELECTRICAL DATA

Total power consumption (W)	10.1
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	275
Inrush Current (A)	20
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	30
Max. products per 16A C Breaker	45
Max. products per 20A C Breaker	54
Max. products per 10A B Breaker	20
Max. products per 16A B Breaker	30
Max. products per 20A B Breaker	36

GIOTTO 235 4000K SURFACE DALI 3034760

Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B10	120000
Lifespan L80 B50	120000
Lifespan L90 B50	73500

PHYSICAL DATA

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	92
Nominal Product Diameter (mm)	235
Weight (kg)	0.86

PACKAGING

Product EAN number	8711971347606
Packaging single length / height (cm)	26.5
Packaging single width (cm)	26.5
Packaging single depth (cm)	9.5
DUN14 (inner)	08711971347606
Units per outer package	1
Packaging outer length / height (cm)	26.5
Packaging outer width (cm)	26.5
Packaging outer depth (cm)	9.5

SAFETY DATA

Glow Wire Test (°C)	850
---------------------	-----



GIOTTO 235 4000K SURFACE DALI
3034760

Optimal operating condition (°C)	-25-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No