



Features

- LED Striplight replacement for incandescent lamp
High lumen output: up to 806lm 15,000 hours average rated life Up to 85% energy saving Creates a warm ambience similar to traditional lamps Perfect for kitchen, mirror lighting, shaver lighting, bathroom 3 year warranty


Product Overview

Product name	ToLEDo Striplight V3 500MM 700LM S14s
Technology	LED
Watt (Rated) (W)	7.5
Cap/Base	S14s
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741151
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Wattage (W)	7.5
Power consumption (W)	7.5
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288281063

ToLEDo Striplight V3 500MM 700LM S14s
0028106

Warranty	3 years
Useful luminous flux (#use)	700

Technical drawings

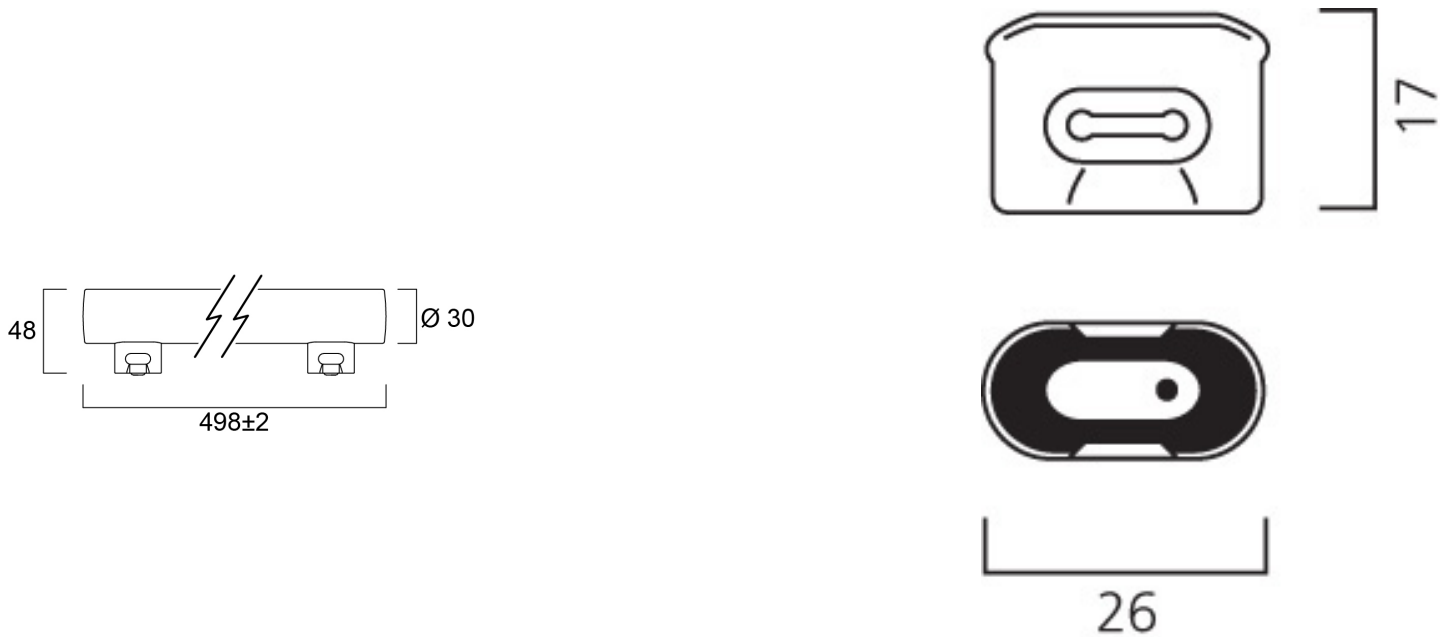

Data table

GENERAL DATA	
Product name	ToLEDo Striplight V3 500MM 700LM S14s
Technology	LED
Watt (Rated) (W)	7.5
Cap/Base	S14s
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959

ToLEDo Striplight V3 500MM 700LM S14s 0028106

E-number FI	4741151
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	700
Luminous flux (Rated) (lm)	700
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	7.5
Wattage (W)	7.5
Equivalent watt (W)	50
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	2.8
Inrush Duration (µs)	300
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	287
Max. products per 13A C Breaker	373

ToLEDo Striplight V3 500MM 700LM S14s 0028106

Max. products per 16A C Breaker	57
Max. products per 20A C Breaker	575
Max. products per 16A B Breaker	29

LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

PHYSICAL DATA

Nominal Product Length (mm)	498
Nominal Product Diameter (mm)	48
Weight (kg)	0.104

PACKAGING

Product EAN number	5410288281063
Packaging single length / height (cm)	50.4
Packaging single width (cm)	5.0
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288281060
Units per outer package	6
Packaging outer length / height (cm)	51.4
Packaging outer width (cm)	10.6

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

ToLEDo Striplight V3 500MM 700LM S14s
0028106

Energy label



0028106



8
kWh/1000h



2019/2015



0028106



8
kWh/1000h



2019/2015