

### Features

- Logistics and Industry high bay luminaire with Aisle optics to provide necessary illumination for narrow areas, comes complete with 2000mm flying lead and 1000mm suspension cable, aluminium housing, PC diffuser, IP65, IK08, Class I, 4000K, CRI80, 3 step MacAdam ellipse, DALI dimmable, 40800lm, 224W, 182lm/W, 105.000hrs L80B50 lifespan, 446 x 963 x 96mm (LxWxD) dimensions, 10.64kg weight, RAL7012 Basalt Grey color, -30...+50°C operating temperature range.

### Product Overview


|                                   |                                 |
|-----------------------------------|---------------------------------|
| Product name                      | Rocks IP65 40KLM 840 AISLE DALI |
| Technology                        | LED (3 SDCM)                    |
| Cap/Base                          | N/A                             |
| Housing                           | Aluminium                       |
| Mount                             | Suspended                       |
| General application               | Logistics & Industry            |
| ETIM Class                        | EC001716                        |
| E-number FI                       | 4327146                         |
| Fixture luminous flux (lm)        | 40800                           |
| Luminaire efficacy (lm/W)         | 182                             |
| Correlated colour temperature (k) | 4000                            |
| Light colour                      | Neutral White                   |
| CRI (Ra)                          | 80                              |
| Colour Consistency (SDCM)         | 3                               |
| Colour Variation Initial (SDCM)   | 3                               |
| Beam Angle (°)                    | 60                              |
| Beam Angle (°)                    | 30×60                           |
| Glare control                     | < 22                            |
| Photobiological Risk Group        | RG1                             |

# Concord

Rocks IP65 40KLM 840 AISLE DALI  
**2825411**

|                             |                             |
|-----------------------------|-----------------------------|
| Total power consumption (W) | 224                         |
| Electrical protection       | Class I                     |
| Control gear type           | LED driver constant current |
| Dimmable                    | Yes                         |
| LED Flickering Rate         | Ultra low (5% or less)      |
| Housing colour              | Grey                        |
| IP rating                   | IP65                        |
| IK rating                   | IK08                        |
| Product EAN number          | 5025768254118               |
| Warranty                    | 5 years                     |
| Dimming method              | DALI-2                      |

## Photometry

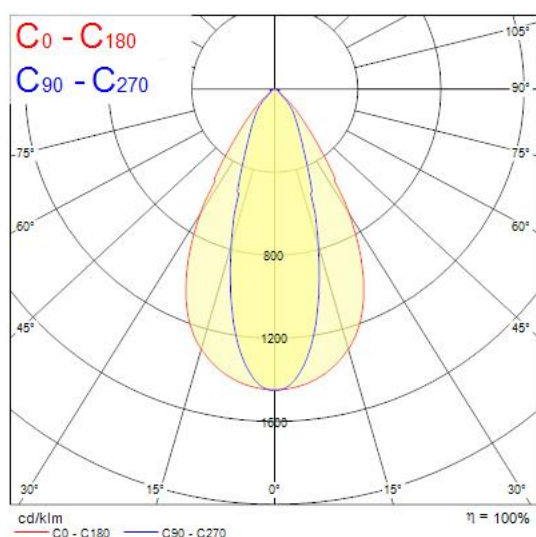

## Technical drawings

