



Features

• MC2-KIT 2.4M 3K DALI WHT OPAL LED luminaire, white RAL9016 finishing, direct distribution, suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 3000K warm white, total system power: 36W, total fixture output: 4600lm, luminaire efficacy: 128lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, DALI dimmable, electrical protection: CLASS I, IP20, suitable for internal environment only.


Product Overview

Cap/Base	N/A
Control gear type	Electronic ballast

Concord

MC2 KIT 2.4M 3K DALI WHT OPAL
2071474

Photometry

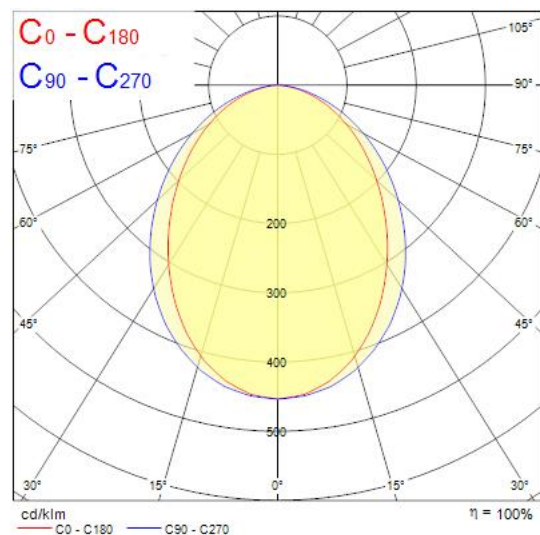

Technical drawings

