


START WATERPROOF 1200 HOUSING 1X
0047193

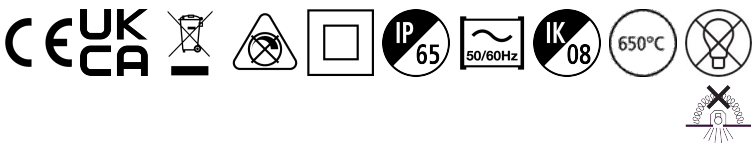

Features

- Luminaire, polycarbonate housing
- Single version, 1200mm
- Protection type IP65
- Luminous flux and light colour vary depending on LED tubes used
- To be used with T8 LED tubes
- Easy to install with stainless steel fixing brackets included for ceiling mounting
- Ideal for any industrial facilities, garages, car parks, workshops.

Product Overview

Product name	START WATERPROOF 1200 HOUSING 1X
Technology	LED
Cap/Base	2G13
Housing	PC Polycarbonate
Mount	Wall surface mounted
Light source included	Fixture without Lightsource
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357155
Fixture luminous flux (lm)	1
Luminaire efficacy (lm/W)	1
Light colour	N/A
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Total power consumption (W)	0.1
Electrical protection	Class II
Control gear type	Not required
Dimmable	No
Housing colour	Grey
IP rating	IP65



START WATERPROOF 1200 HOUSING 1X
0047193

IK rating	IK08
Product EAN number	5410288471938
Warranty	5 years
Dimming method	N/A

Technical drawings

